Pronto *By* Rheem

LEARN MORE AT energystar.gov

Tankless Gas Water Heater -- With Remote Digital Temperature Display.
.82 eff & .94eff , 12-Year Heat Exchanger Warranty, 5-Year Parts Warranty.

Temp set at 120°F *(Field Changeable to 140 °F)* – Min Flow rate .40gpm – Min Pressure 14psi. ¾" Gas & Water Connections

.82%

← DV
3"/5"
Vent

← X →
No Vent
Required

.94%

← PVC
Vent

RTG-95		RTG-84		RTG-70	RTG*H*-95		RTG*H*-84
XL $ 1,585.00 DVL $ 1,610.00		XL $ 1,235.00 DVL $ 1,275.00		XL $ 970.00 DVL $ 1,055.00	DVL , XL $ 1,955.00		DVL , XL $ 1,555.00
11,000BTU - 199,900BTU	~	11,000BTU - 180,000BTU	~	11,000BTU - 160,000BTU	11,000BTU - 199,900BTU	~	11,000BTU - 157,000BTU
9.5 Gpm @ 35ºF rise	~	8.4 Gpm @ 35ºF rise	~	6.4 Gpm @ 35ºF rise	9.5 Gpm @ 35ºF rise	~	8.4 Gpm @ 35ºF rise
7.4 Gpm @ 45ºF rise	~	6.7 Gpm @ 45ºF rise	~	5.6 Gpm @ 45ºF rise	8.4 Gpm @ 45ºF rise	~	6.6 Gpm @ 45ºF rise
4.3 Gpm @ 77ºF rise	~	3.9 Gpm @ 77ºF rise	~	3.3 Gpm @ 77ºF rise	4.9 Gpm @ 77ºF rise	~	3.9 Gpm @ 77ºF rise
Specify Gas Type **DV-** 25⅝" x 13⅞" x 9⅞" **X -** 23⅝" x 13⅞" x 8⅞"					27½" x 18½" x 9¾"		
Use 3"/5" Concentric Vent Pipe - With Condensate Connector					2" / 3" PVC Venting		

DV-Vertical Vent Kit	$ 195.00
RTG20211 (3/5") Flashing, Storm Collar, Top.	

DV-Horizontal Vent Kit	$ 145.00
RTG20210 (3/5") Elbow, Wall Plate, Termination.	

Concentric venting is certified for zero(0″) clearance to combustibles.

3″/5″ -3′---------- Vent Pipe	$ 75.00
3″/5″ -2′---------- Vent Pipe	66.00
3″/5″ -7.5″ -22″ - Vent Pipe	96.00
3″/5″ -11″---------- Vent Pipe	45.50
3″/5″ -6″---------- Vent Pipe	38.00
3″/5″ -FL------Std. Flashing	42.00
3″/5″ -TP------Vert. Top	132.00

3″/5″ -90--90° ELL	$ 93.50
3″/5″ -45--45° ELL	71.50
3″/5″ -SC-Storm Collar	8.50
2″/3″ PVC Flat Horiz. Vent Termination	37.00
3″ PVC Concentric Vent Kit	88.00

Valve Piping Kit	$ 136.00



-U

PRONT O(RHEEM) INFORMATION

Outdoor Water Heater

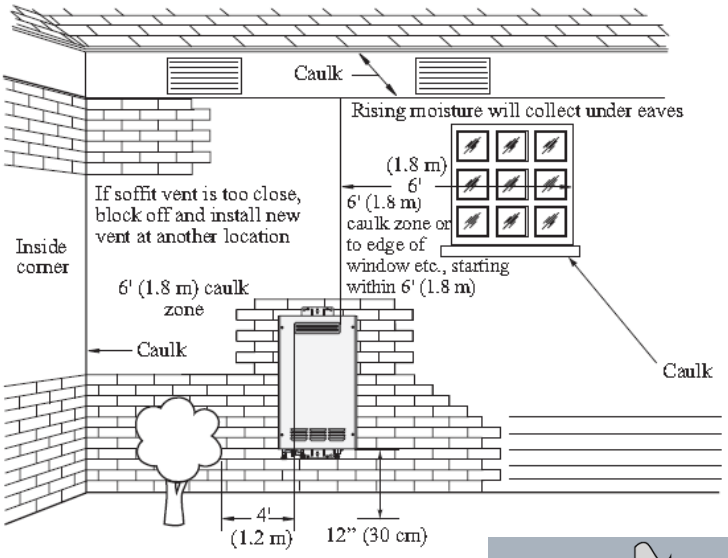

Indoor Water Heater

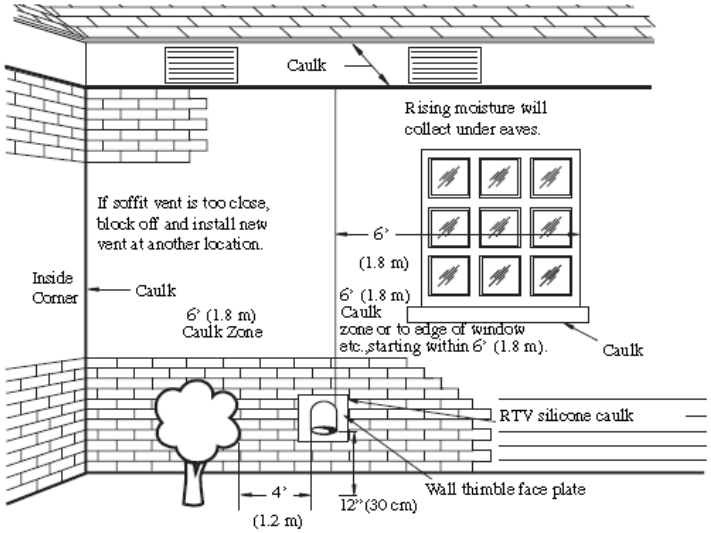

RTG20210
DV Horizontal Vent Kit

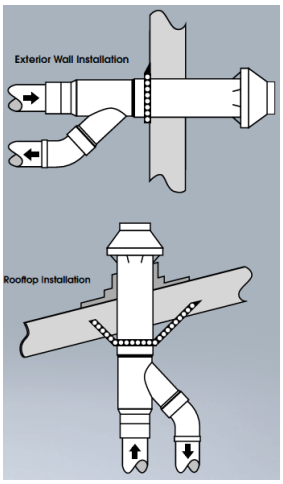

PVC Concentric Vent

RTG20211
DV Vertical Vent Kit

SP20285/6
2"/3" PVC Horiz. Flat Termination

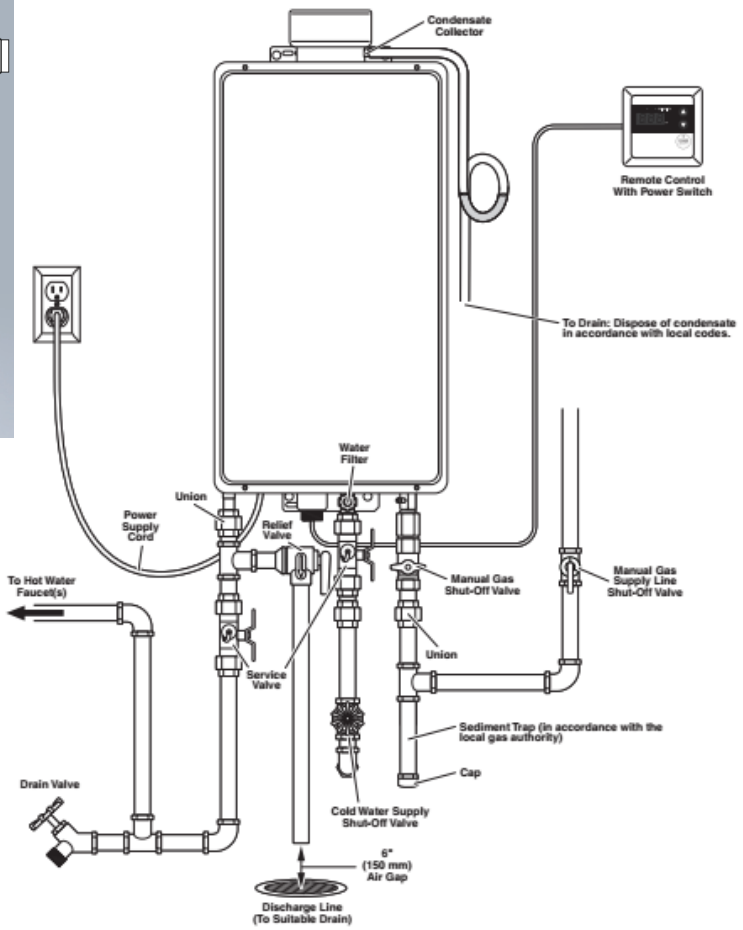
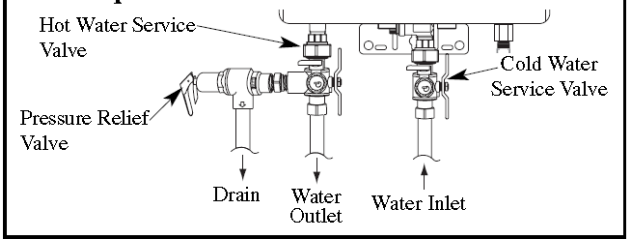
Alternate Water Piping Arrangement with Optional Valve Kit