
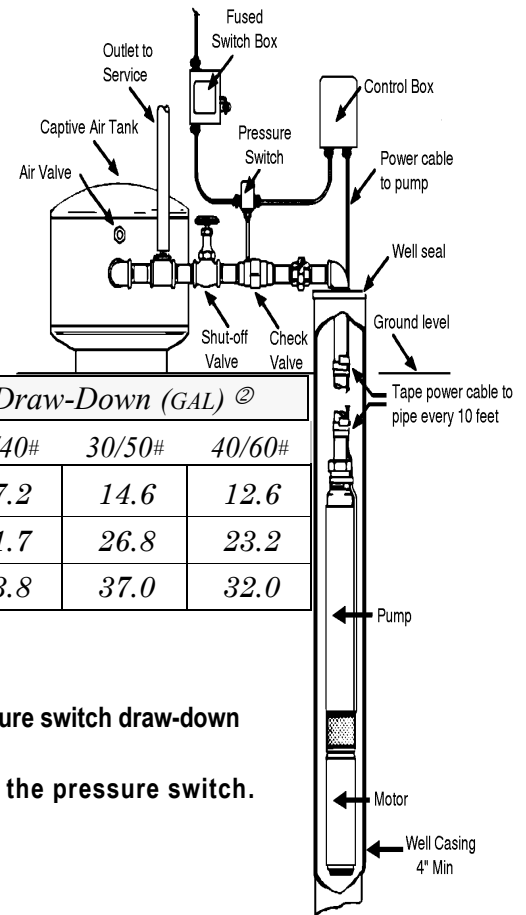



WATER SYSTEMS TANKS & FITTINGS

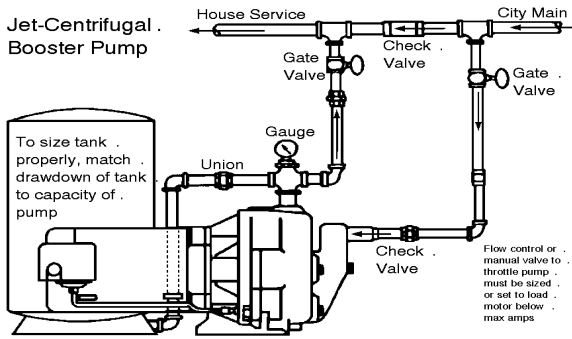

WELLMATE FIBERGLASS TANKS

Model [Ⓛ]	List	Inlet	Width x Height	Draw-Down (GAL) [Ⓢ]		
				20/40#	30/50#	40/60#
WM-14WB.....(=47gal)	1,050.00	1/4" Fip	22" x 42 1/4"	17.2	14.6	12.6
WM-25WB.....(=86gal)	1,180.00	1/4" Fip	24 1/2" x 56 1/2"	31.7	26.8	23.2
WM-35WB... (=119gal)	1,395.00	1/4" Fip	24 1/2" x 74"	43.8	37.0	32.0

(=86Gal) → drawdown is equal to an #86 non-diaphragm pressure tank. Etc.

① Maximum Working Pressure 125# ♦ 5 Year Warranty

② To find your minimum tank size: Match your system flow rate GPM to your pressure switch draw-down GPM to provide at least 1 minute pump run time.

The empty tank pressure should be 2psi less than the cut-in pressure of the pressure switch.



*Pump Check

*Foot Valves

Plastic Screens

1/2"	\$ 11.95		
3/4"	15.88	\$ 13.65	\$ 2.29
1"	21.75	18.50	2.67
1 1/4"	28.50	25.85	3.82
1 1/2"	41.10	36.00	4.61
2"	69.45	61.65	5.35


* = No-Lead Brass spring checks & foot valves

4-IN-1 Plastic Foot Valve \$ 16.95



Pressure Switches

(Import)




MPSM1 [Ⓛ]	- 30/50 ~ 40/60 ~ 50/70	\$ 16.60
MPSM4 [Ⓢ]	- 30/50 ~ 40/60 ~ 50/70	16.95
MPSP [Ⓢ]	- 30/50 ~ 40/60	19.50
XHD [Ⓢ]	- 60/80 ~ 80/100	108.00
DG2	Rod-Float Switch Emptying	89.00
DG2-R	Rod-Float Switch Filling	96.00

[Ⓛ] On/Off Switch, [Ⓢ] With Low Pressure Cut-off,

[Ⓢ] With Pulsation Plug, [Ⓢ] Xtra Heavy Duty

Pressure Gauges

2" Face	100# (import)	\$ 4.95
2" Face	(15#,...,600#)	11.35
2 1/2" Face		15.50
2 1/2" Face	liquid filled	28.00
Water Test Gauge	160#	19.20



PVC

SS

Tank Tee

1 1/4" Mip x 1" Fip	PVC	\$ 12.75
1" STAINLESS STEEL		33.60
1 1/4" STAINLESS STEEL		41.45



Typical Installations

NOTE - TWO WIRE INSTALLATION

On two wire pump installations the control box is not used. Two wire power cable is used direct from the pressure switch to the pump.

