

PLASTIC PIPE CEMENTS



PVC	1/4 PT	1/2 PT	1 PT	1 QT
Regular(05) (Sch 40) Clear	\$ 6.60	9.65	16.98	26.75
Heavy Duty(11) (Sch 80) Gray	15.75	20.95	35.25
Red Hot(50) Blue	6.40	10.50	18.00	30.25
Medium-Body(21) Blue	7.10	11.75	19.95	33.85
Wet/Dry(25) Blue	7.10	11.50	19.60	32.80
PVC / CPVC(70) (NSF Purple Primer)	7.10	9.65	19.40	31.25
ABS(73)	6.45	8.85	14.75	24.00


CPVC(CTS5)	1/4 PT	1/2 PT	1 PT	1 QT
	13.50	21.50		

MULTI-PURPOSE(90)	1/4 PT	1/2 PT	1 PT	1 QT
	7.65	11.15		




APPLICATORS

BCP-1 Reusable 1" Brush Cap for Pt. & Qt. cans	\$ 10.50
DP-75, DP-150 Cap-Daubers	1.50



Wrap Tape In Direction of Threads (clockwise for right-hand thread). Use ONLY 2-3 wraps of tape.

Joint Assembly:
 Tighten threaded joints 1-2 turns beyond finger tight. Avoid "backing up" the wrenched assembly. DO NOT over-tighten.

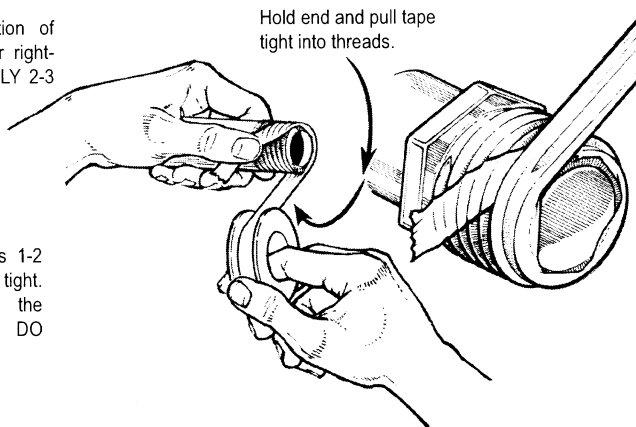

Hold end and pull tape tight into threads.

Use a TFE Tape Sealant with a minimum thickness of 25 mil.

Always cover end of fitting at the start to prevent thread seizing prior to proper joint makeup.

TEFLON TAPE

1/2 x 260"	1/2 x 520"	3/4 x 260"	3/4 x 520"	1 x 520"
\$.70	.92	1.20	1.55	2.05

HIGH DENSITY (Pink) 1/2 x 260" \$ 4.95 4.95 1/2 x 260" (YELLOW) **FOR GAS**