2020


Residential Fixtures and Faucets List Price Guide

Effective April 1, 2020



Fixture Colors and Finishes

The color availability of each product is shown beneath the product categories in this chart. This guide also provides the color codes assigned to each color or finish.

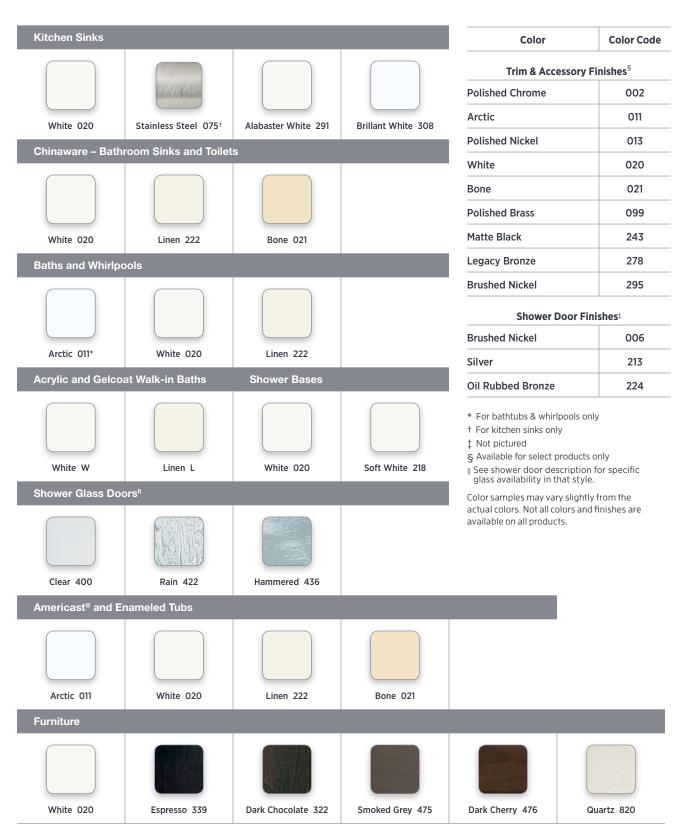

Residential Fixtures

Icons 3 **Kitchen Sinks** 4-63 Inspired Possibilities 5 Kitchen Sinks at a Glance... 6 Avery[®] Fine Fireclay Sinks 8 Country Kitchen Sink 12 Delancey® Cast Iron Sinks 13 Quince® Cast Iron Sinks 21 Avery® Stainless Steel Sinks 24 Pekoe® Stainless Steel Sinks 26 Edgewater® Stainless Steel Sinks 35 Portsmouth® Stainless Steel Sinks 41 Reliant[®] Stainless Steel Sinks 52 Colony® Collection Stainless Steel Sinks and Sink/Faucet Systems 55 Bathing 64-132 Safer and Accessible Living 64 Acrylic Walk-In Baths 66 Gelcoat Walk-In Baths 68 Seated Shower 75 76 Safety Tubs Freestanding Soaking Tubs at a Glance... 78 Baths and Whirlpools 84 Popular Bath Accessories 92 Luxury Series 93-115 EverClean® System 94 EcoSilent® Whirlpool 95 Whirlpools and Air Baths 96 Studio® Bath Wall Set 110-112 Master Series 116 Americast[®] Enameled Steel 125 **Enameled Steel Bathtubs** 132 **Tub and Shower Doors** 133-146 Frameless/Semi-Frameless Shower Doors 134 Framed Tub and Shower Doors 140 Shower and Tub Enclosure/Bathing Fixture Cross Reference 146 **Shower Bases** 147-154 Solid Surface Shower Bases 147 Acrylic Shower Bases 150

Continued on next page.

American Standard

Residential Fixtures

Bathroom Furniture	155-165
Furniture – Timeless Beauty for the Bath	156
Town Square [®] S Collection	157
Portsmouth [®] Collection	159
American Standard® Furniture for Townsend®	161
Edgemere® Console	163
Retrospect® Console	164
Studio® Collection	165
Bathroom Sinks	166-197
Bathroom Sinks at a Glance	167
Pedestal Sinks	168
Above Counter Sinks	181
Drop-In Sinks	184
Under Counter Sinks	190
Wall-Hung Sinks	194
Toilets	198-294
VorMax [®] Plus Self-Cleaning Toilets	199
ActiClean® Self-Cleaning Toilet	200
American Standard Two-Piece Toilets – Good, Better, Best	201
H ₂ Option [®] MaP Premium Ultra-High-Efficiency Toilets	202
VorMax Technology Toilets	203
Standard Toilets at a Glance	204
One-Piece Toilets	205
Two-Piece Toilets	216
Bidets	279
SpaLet [®] Toilet	280
SpaLet Seats	281
Toilet Seats	284
Toilet Trip Levers	291
Toilet Tanks	292
Residential Faucets	297
Warranties	552

American Standard

lcons

Look for these symbols throughout our List Price Guide to quickly identify key information and important features of our products. Each symbol is prominently displayed to make your purchasing decision easier and ensure your choice of product meets your requirements.





✨ Check your local codes to determine if 1.6 gpf/6.0 Lpf toilets are allowed in your area.

CALGreen® is a registered trademark of California Building Standards Commission.

American Standard

Kitchen Sinks

From the sleek luster of stainless steel to the charm of a farmhouse style, every kitchen sink in the American Standard collection is crafted for superior performance and lasting durability. Meticulously designed for the busiest kitchens, when only the best will do.



Kitchen Sinks



Inspired Possibilities

The kitchen has changed dramatically over the years. It has become automated, wired and built to ease the stress of today's family on the go. But, just as it was 100 years ago, and will likely be 100 years from now, the kitchen remains the heart of the home; for that reason, our sinks and accessories are designed with you and your everyday life in mind.

The kitchen sink is likely one of the most used appliances in your home.

Whether it's washing dishes, prepping food or just cleaning your hands – through it all, you expect your sink to last and look good while doing so. American Standard is dedicated to providing kitchen sinks and accessories that work hard for you while still boasting the quality and timeless style that you deserve.

Why Choose American Standard Sinks?

Our sinks are made with you in mind, with multiple materials and designs to choose from and several installation options for both replacement and custom solutions.

Performance

Our use of long-lasting, solid materials and our flawless attention to detail creates dependable performance for life.



Durable – Stainless steel comes in many different shapes, sizes and thicknesses. American Standard offers 16, 18 and 20-gauge T304 stainless steel.



Eco-Friendly – All of our sinks are lead-free, and our Fine Fireclay models are crafted from recyclable, eco-friendly materials.

Sustainable – Our cast iron sinks are crafted from over 80% recycled or reclaimed iron, making them a great choice for the environmentally conscious home owner.

Technology

Our innovations make life easier and more enjoyable by solving the little and not so little problems of everyday living.



Quiet

SoundSecure[™] – Rubber sound pads on the bottom of the sink help to reduce excess sound and vibration during use.



SoundSecure+[™] – Exceptional sound deadening with rubber sound pads on both the bottom and sides of the underside of the sink.



Protected

StoneLock™ – Our multilayer spray insulation covers the underside of your sink to further help with sound absorption and to minimize condensation.



Avery[®] 33" Fine Fireclay Sink 1180SB3320.291



Pekoe[®] 33" Apron Sink 18SB.9332200A.075

Kitchen Sinks

Kitchen Sinks at a Glance...





Avery[®] Stainless Steel

Pages 24-25



American Standard

Kitchen Sinks at a Glance...



*ADA compliant version available. See product page for details.

American Standard

Kitchen Sinks

-	
\geq	
<u> </u>	
_	

Fine Fireclay	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Avery Collection 36" Single Bowl Apron Sink	 Hand-crafted from fine fireclay Recyclable, eco-friendly, lead-free materials Under mount or flush mount installation Offset drain Lustrous Alabaster White finish Protective bottom grid and drain included 39" (991 mm) minimum cabinet base required 		0		
	Nominal Dimensions: • 35-3/4" x 20" x 10" (908 x 508 x 254 mm)	T	191 - 191 - 191 - 191 - 191 - 191 - 191 - 191 - 191 - 191 - 191 - 191 - 191 - 191 - 191 - 191 - 191 - 191 - 191		
	Bowl Size: • 34" (864 mm) wide • 18-1/4" (464 mm) front-to-back • 9" (229 mm) deep				
				11	1
1180SB3620.291	Avery 36" Single Bowl Apron SinkUnder mount or flush mount	99 lbs (44.9 kg)	2.86	291 Alabaster White	1,448
	Included Components				
⊳ 7302391-401.0750A	Bottom grid	0.62 lbs (0.28 kg)	0.14	075 Stainless Steel	125
⊳ 7301839-201.XXX0A	Waste fitting	0.61 lbs (0.28 kg)	0.02	002 Polished Chrome	55

▷ Parts Program (Non-Premier)

American Standard

Kitchen Sinks

Fine Fireclay	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Avery Collection 33" Single Bowl Apron Sink	 Hand-crafted from fine fireclay Recyclable, eco-friendly, lead-free materials Under mount or flush mount installation Offset drain Lustrous Alabaster White finish Protective bottom grid and drain included 36" (914 mm) minimum cabinet base required 				
	Nominal Dimensions: • 32-3/4" x 20" x 10" (832 x 508 x 254 mm)	f		dar	
	Bowl Size: • 31-3/16" (792 mm) wide • 18-7/16" (468 mm) front-to-back • 8-3/4" (223 mm) deep				
				* *	
1180SB3320.291	Avery 33" Single Bowl Apron SinkUnder mount or flush mount	93.7 lbs (42.5 kg)	2.86	291 Alabaster White	1,346
	Included Components				
⊳ 7302390-401.0750A	Bottom grid	2.95 lbs (1.34 kg)	0.29	075 Stainless Steel	128
⊳ 7301839-201.XXX0A	Waste fitting	0.62 lbs (0.28 kg)	0.02	002 Polished Chrome	55

▷ Parts Program (Non-Premier)

Avery

Kitchen Sinks

ine Fireclay	DESCRIPTION	NET WEIGHT	PTS	COLORS	list Price
very Collection by Single Bowl foron Sink	 Hand-crafted from fine fireclay Recyclable, eco-friendly, lead-free materials Under mount or flush mount installation Offset drain Lustrous Alabaster White finish Protective bottom grid and drain included 33" (838 mm) minimum cabinet base required Nominal Dimensions: 29-3/4" x 20" x 10" (755 x 508 x 254 mm) Bowl Size: 28-3/16" (716 mm) wide 18-7/16" (468 mm) front-to-back 8-3/4" (223 mm) deep 				
				9 9	/.
1180SB3020.291	Avery 30" Single Bowl Apron SinkUnder mount or flush mount	78.1 lbs (35.4 kg)	2.86	291 Alabaster White	1,250
	Included Components				
⊳ 7302389-401.0750A	Bottom grid	2.71 lbs (1.23 kg)	0.23	075 Stainless Steel	128
⊳ 7301839-201.XXX0A	Waste fitting	0.61 lbs (0.28 kg)	0.02	002 Polished Chrome	55

> Parts Program (Non-Premier)

Avery

American Standard

Kitchen Sinks

Fine Fireclay	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Avery Collection 36" Double Bowl Apron Sink	 Hand-crafted from fine fireclay Recyclable, eco-friendly, lead-free materials Under mount or flush mount installation Offset drain Lustrous Alabaster White finish Two protective bottom grids included Drains included 39" (991 mm) minimum cabinet base required Nominal Dimensions: 35-3/4" x 20" x 10" (908 x 508 x 254 mm) 		2		
	Each Bowl Size: • 17" (424 mm) wide • 18-1/4" (464 mm) front-to-back • 9" (229 mm) deep				
				11	
1180DB3620.291	 Avery 36" Double Bowl Apron Sink Under mount or flush mount 	102 lbs (46.3 kg)	2.86	291 Alabaster White	1,550
	Included Components				
⊳ 7302392-401.0750A	Bottom grid	1.63 lbs (0.74 kg)	0.14	075 Stainless Steel	128
⊳ 7301839-201.XXX0A	Waste fitting	0.61 lbs (0.28 kg)	0.02	002 Polished Chrome	55

▷ Parts Program (Non-Premier)

Avery

Country Sink

Kitchen Sinks

Vitreous China	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Country Kitchen Sink	 High splash back Vitreous china Faucet holes on 8" (203 mm) centers for wall-mounted sink faucet 3-1/2" (89 mm) drain with strainer included Requires support framing in cabinetry 				
	Nominal Dimensions: • 30" x 22" (762 x 559 mm)		C H	LAS	
	Bowl Size: • 26-1/2" (673 mm) wide • 17-1/2" (445 mm) front-to-back • 8" (203 mm) deep Suggested faucets (not included):	24			
	Heritage [®] - see page 317	11	11		
9062.008	Country Kitchen Sink	108 lbs (49 kg)	3.82	020 White	1,117

12 List Price Guide 2020

American Standard

Kitchen Sinks

Cast Iron	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Delancey Collection 36" Single Bowl Apron Front Sink	 Single bowl sink 8-7/8" (225 mm) depth Under mount installation 4 oversized holes Lustrous Brilliant White finish 39" minimum cabinet base required Nominal Dimensions: 36" x 22" x 8-5/8" (915 x 560 x 219 mm) Bowl Size: 32-1/2" (827 mm) wide 15-3/8" (390 mm) front-to-back 8-5/8" (219 mm) deep 				
77SB36220A.308	 Delancey 36" Single Bowl Apron Front Sink Under mount installation 	165.8 lbs (75.2 kg)	2.14	308 Brilliant White	1,408
	Optional Accessories:	1	1	1	<u> </u>
8430000.075	Bottom grid	3.0 lbs (1.36 kg)	0.14	075 Stainless Steel	165
9028000.075*	Waste fitting	0.60 lbs (0.27 kg)	0.02	075 Stainless Steel	21

* Non-Premier Product

Delancey

American Standard

Kitchen Sinks

Cast Iron	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Delancey Collection 33" Single Bowl Apron Front Sink	 Single bowl sink 8-7/8" (225 mm) depth Under mount installation 4 oversized holes Lustrous Brilliant White finish 36" minimum cabinet base required Nominal Dimensions: 33-1/16" x 22-3/16" x 8-3/4" (840 x 564 x 223 mm) Bowl Size: 29-1/8" (740 mm) wide 15-1/16" (382 mm) front-to-back 8-3/4" (223 mm) deep 		11		
77SB33220A.308	Delancey 33" Single Bowl Apron Front Sink Under mount installation 	176.0 lbs (79.8 kg)	2.64	308 Brilliant White	1,357
	Optional Accessories:				
8418000.075	Bottom grid	2.53 lbs (1.15 kg)	0.17	075 Stainless Steel	144
9028000.075*	Waste fitting	0.60 lbs (0.27 kg)	0.02	075 Stainless Steel	21

Delancey

American Standard

Kitchen Sinks

Cast Iron	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Delancey Collection 30" Single Bowl Apron Front Sink	 Single bowl sink 8-7/8" (225 mm) depth Under mount installation 4 oversized holes Lustrous Brilliant White finish 33" minimum cabinet base required Nominal Dimensions: 30" x 22" x 8-5/8" (762 x 560 x 219 mm) Bowl Size: 26-1/16" (662 mm) wide 15-3/8" (390 mm) front-to-back 8-5/8" (219 mm) deep 				
77SB30220A.308	 Delancey 30" Single Bowl Apron Front Sink Under mount installation 	139.0 lbs (63.1 kg)	1.80	308 Brilliant White	1,311
	Optional Accessories:			^	
8432000.075	Bottom grid	2.40 lbs (1.09 kg)	0.13	075 Stainless Steel	134
9028000.075*	Waste fitting	0.60 lbs (0.27 kg)	0.02	075 Stainless Steel	21

* Non-Premier Product

Delancey

American Standard

Kitchen Sinks

Cast Iron	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Delancey Collection 36" Double Bowl Apron Front Sink	 Double bowl sink 8-7/8" (225 mm) depth Under mount installation 4 oversized holes Lustrous Brilliant White finish 39" (991 mm) minimum cabinet base required Nominal Dimensions: 36" x 22-1/16" x 8-5/8" (915 x 560 x 219 mm) Bowl Size: 15-3/16" (386 mm) wide 15-3/8" (390 mm) front-to-back 8-5/8" (215 mm) deep 				
77DB36220A.308	 Delancey 36" Double Bowl Apron Front Sink Under mount installation 	182.6 lbs (82.8 kg)	2.14	308 Brilliant White	1,568
	Optional Accessories:	11			
8431000.075	Bottom grid set (2)	2.98 lbs (1.35 kg)	0.17	075 Stainless Steel	185
9028000.075*	Waste fitting	0.60 lbs (0.27 kg)	0.02	075 Stainless Steel	21



Kitchen Sinks

Cast Iron	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Delancey Collection 33" Double Bowl Apron Front Sink	 Double bowl sink 8-7/8" (225 mm) depth Under mount installation 4 oversized holes Lustrous Brilliant White finish 36" (914 mm) minimum cabinet base required 		-		
-	Nominal Dimensions: • 33-1/16" x 22-1/16" x 8-11/16" (840 x 560 x 221 mm)	1			
	Each Bowl Size: • 13-7/16" (342 mm) wide • 15-1/16" (382 mm) front-to-back • 8-11/16" (221 mm) deep				
77DB33220A.308	 Delancey 33" Double Bowl Apron Front Sink Under mount installation 	176.0 lbs (79.8 kg)	2.64	308 Brilliant White	1,505
	Optional Accessories:	1			
8419000.075	Bottom grid set (2)	2.48 lbs (1.12 kg)	0.17	075 Stainless Steel	165
9028000.075*	Waste fitting	0.60 lbs (0.27 kg)	0.02	075 Stainless Steel	21
	1	1		1	

* Non-Premier Product

Delancey

American Standard

Kitchen Sinks

Cast Iron	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Delancey Collection 30" Single Bowl Sink	 Single bowl sink Under mount installation Lustrous Brilliant White finish 33" (838 mm) minimum cabinet base required Nominal Dimensions: 30" x 19" x 8-11/16" (762 x 483 x 221 mm) Bowl Size: 26-1/16" (662 mm) wide 15-3/8" (390 mm) front-to-back 8-11/16" (221 mm) deep 				
77SB30190.308	Delancey 30" Single Bowl SinkUnder mount installation			308 Brilliant White	907
	Optional Accessories:		1	1	
8432000.075	Bottom grid	2.40 lbs (1.09 kg)	0.13	075 Stainless Steel	134
9028000.075*	Waste fitting	0.60 lbs (0.27 kg)	0.02	075 Stainless Steel	21



Kitchen Sinks

Cast Iron	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Delancey Collection 18" Single Bowl Sink	 Single bowl sink Under mount installation Lustrous Brilliant White finish 21" (533 mm) minimum cabinet base required Nominal Dimensions: 18" x 16" x 8" (457 x 406 x 203 mm) Bowl Size: 14-13/16" (377 mm) wide 12-13/16" (326 mm) front-to-back 8" (203 mm) deep 			<u>J</u>	
77SB16180.308	Delancey 18" Single Bowl SinkUnder mount installation	51.6 lbs (23.4 kg)	1.10	308 Brilliant White	580
	Optional Accessories:		1		
8422000.075	Bottom grid	1.20 lbs (0.54 kg)	0.06	075 Stainless Steel	103
9028000.075*	Waste fitting	0.60 lbs (0.27 kg)	0.02	075 Stainless Steel	21

Delancey

American Standard

Kitchen Sinks

Cast Iron	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Delancey Collection 30" Double Bowl Sink	 Double bowl sink Under mount installation Lustrous Brilliant White finish 33" (838 mm) minimum cabinet base required Nominal Dimensions:				
-	• 30" x 19" x 8-11/16" (762 x 483 x 221 mm)		5	5	
	Bowl Size: • 11-5/16" (304 mm) wide • 15-3/8" (390 mm) front-to-back • 8-11/16" (221 mm) deep				
77DB30190.308	Delancey 30" Double Bowl Sink 30" (762 mm) double bowl sink Under mount installation 			308 Brilliant White	916
	Optional Accessories:	1			
8433000.075	Bottom grid set (2)			075 Stainless Steel	165
9028000.075*	Waste fitting	0.60 lbs (0.27 kg)	0.02	075 Stainless Steel	21



Quince®

Kitchen Sinks

Cast Iron	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Quince Collection 33" Single Bowl Sink	 Single bowl sink Convenient drop-in installation Lustrous Brilliant White finish 3-hole Offset drain 36" (914 mm) minimum cabinet base required Nominal Dimensions: 33" x 22" x 9-3/8" (838 x 561 x 238 mm) Bowl Size: 30-1/4" (768 mm) wide 19-5/16" (491 mm) front-to-back 9-3/8" (238 mm) deep 				
77SB33223.308	Quince 33" Single Bowl Sink 3-hole top mount sink 			308 Brilliant White	780
	Optional Accessories:				
8415000.075	Bottom grid			075 Stainless Steel	134
9028000.075*	Waste fitting	0.60 lbs (0.27 kg)	0.02	075 Stainless Steel	21

American Standard

Quince®

Kitchen Sinks

Cast Iron	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Quince Collection 25" Single Bowl Sink	 Single bowl sink Convenient drop-in installation Lustrous Brilliant White finish 3-hole or 4-hole options 27" (686 mm) minimum cabinet base required Nominal Dimensions: 25" x 22" x 8-7/8" (635 x 558 x 226 mm) Bowl Size: 21-7/16" (545 mm) wide 15-3/4" (400 mm) front-to-back 8-7/8" (226 mm) deep 				
77SB25223.308	Quince 25" Single Bowl Sink 3-hole top mount sink 	73.1 lbs (33.2 kg)	1.56	308 Brilliant White	607
77SB25224.308	Quince 25" Single Bowl Sink 4-hole top mount sink 	73.1 lbs (33.2 kg)	1.56	308 Brilliant White	607
	Optional Accessories:				
8414000.075	Bottom grid	1.85 lbs (0.84 kg)	0.17	075 Stainless Steel	124
9028000.075*	Waste fitting	0.60 lbs (0.27 kg)	0.02	075 Stainless Steel	21

American Standard

Quince®

Kitchen Sinks

Cast Iron	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Quince Collection 33" Double Bowl Sink	 Double bowl sink Convenient drop-in installation Lustrous Brilliant White finish 3-hole or 4-hole options Offset drain 36" (914 mm) minimum cabinet base required Nominal Dimensions: 33" x 22-1/4" x 9" (838 x 565 x 227 mm) Bowl Size: 13-1/2" (343 mm) wide 16-1/8" (410 mm) front-to-back 9" (227 mm) deep 				
77DB33223.308	Quince 33" Double Bowl Sink3-hole top mount sink	108.4 lbs (49.2 kg)	2.64	308 Brilliant White	815
77DB33224.308	Quince 33" Double Bowl Sink 4-hole top mount sink 	108.4 lbs (49.2 kg)	2.64	308 Brilliant White	815
	Optional Accessories:				
8416000.075	Bottom grid set (2)	2.55 lbs (1.16 kg)	0.17	075 Stainless Steel	165
9028000.075*	Waste fitting	0.60 lbs (0.27 kg)	0.02	075 Stainless Steel	21

Kitchen Sinks

Stainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Avery Collection 36" Single Bowl Apron Sink	 Single bowl apron sink 16 gauge stainless steel Under mount or flush mount installation SoundSecure+[™] sound pads StoneLock[™] undercoating Offset drain Protective stainless steel bottom grid 			2	
and the second	 and drain included 39" (991 mm) minimum cabinet base required Nominal Dimensions: 36" x 20" x 11-1/2" (914 x 508 x 292 mm) Bowl Size: 				
	 33" (838 mm) wide 17" (432 mm) front-to-back 10" (254 mm) deep 	L	_		
1180SB3620SS.075	Avery 36" Single Bowl Apron SinkUnder mount or flush mount		3.06	075 Stainless Steel	1,334
	Included Components:			1	
⊳ 791605-203.0750A	Bottom grid	2.40 lbs (1.09 kg)	0.34	075 Stainless Steel	183
⊳ 7301839-201.XXX0A	Waste fitting	0.61 lbs (0.28 kg)	0.02	002 Polished Chrome	55

 \triangleright Parts Program (Non-Premier)

American Standard

Kitchen Sinks

Stainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Avery Collection 30" Single Bowl Apron Sink	 Single bowl apron sink 16 gauge stainless steel Under mount or flush mount installation SoundSecure+[™] sound pads StoneLock[™] undercoating Offset drain Protective stainless steel bottom grid and drain 33" (838 mm) minimum cabinet base required Nominal Dimensions: 30" x 20" x 11-1/2" (762 x 508 x 292 mm) Bowl Size: 27" (686 mm) wide 17" (432 mm) front-to-back 10" (254 mm) deep 				
1180SB3020SS.075	Avery 30" Single Bowl Apron SinkUnder mount or flush mount	43.2 lbs (19.6 kg)	2.29	075 Stainless Steel	1,128
	Included Components:				
⊳ 791604-203.0750A	Bottom grid	2.10 lbs (0.95 kg)	0.23	075 Stainless Steel	154
⊳ 7301839-201.XXX0A	Waste fitting	0.61 lbs (0.28 kg)	0.02	002 Polished Chrome	55

▷ Parts Program (Non-Premier)

American Standard

Kitchen Sinks

Stainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Pekoe Collection 33" Apron Front Sink	 18 gauge stainless steel Fabricated single bowl apron sink 10 mm radius corners 9" (229 mm) deep bowl Under mount or flush mount installation SoundSecure+[™] sound pads StoneLock[™] undercoating Bottom grid included Waste fitting included 				
	Nominal Dimensions: • 33" x 22" x 9" (838 x 559 x 229 mm)		<u>a</u>		
	Bowl Size: • 30-1/4" (768 mm) wide • 16-9/16" (420 mm) front-to-back • 9" (229 mm) deep				
18SB.9332200A.075	Pekoe 33" Apron Front Sink	35.6 lbs	3.57	075 Stainless	773
	Under mount or flush mount sink	(16.2 kg)		Steel	
	Included Components:	,			
⊳ 7434000.075	Bottom grid	2.23 lbs (1.01 kg)	0.24	075 Stainless Steel	126
9028000.075*	Waste fitting	0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21

▷ Parts Program (Non-Premier)

American Standard

Kitchen Sinks

Stainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Pekoe Collection 00" Apron Front Sink	 18 gauge stainless steel Fabricated single bowl apron sink 10 mm radius corners 9" (229 mm) deep bowl Under mount or flush mount installation SoundSecure+[™] sound pads StoneLock[™] undercoating Bottom grid included Waste fitting included Nominal Dimensions: 30" x 22" x 9" (762 x 559 x 229 mm) Bowl Size: 27-1/4" (692 mm) wide 16-9/16" (420 mm) front-to-back 9" (229 mm) deep 				
18SB.9302200A.075	Pekoe 30" Apron Front SinkUnder mount or flush mount sink	33.4 lbs (15.2 kg)	3.57	075 Stainless Steel	747
	Included Components:				
⊳ 7302361-401.0750A	Bottom grid	4.48 lbs (2.03 kg)	0.21	075 Stainless Steel	123
9028000.075*	Waste fitting	0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21

▷ Parts Program (Non-Premier)

American Standard

Kitchen Sinks

Stainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Pekoe Collection 35" Single Bowl Sink	 18 gauge stainless steel Fabricated single bowl 10 mm radius corners Extra deep 10" (254 mm) bowl Under mount sink SoundSecure+[™] sound pads StoneLock[™] undercoating Bottom grid included Waste fitting included Sink clips included Nominal Dimensions: 35" x 18" x 10" (889 x 457 x 254 mm) Each Bowl Size: 33" (838 mm) wide 16" (406 mm) front-to-back 10" (254 mm) deep 				
18SB.10351800.075	Pekoe 35" Single Bowl SinkUnder mount sink	22 lbs (9.96 kg)	2.08	075 Stainless Steel	710
	Included Components:				
⊳ 7302286-401.0750A	Bottom grid	5.72 lbs (2.60 kg)	0.21	075 Stainless Steel	78
9028000.075*	Waste fitting	0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
⊳ 791676-100.0070A	Under mount sink clips (10)	0.62 lbs (0.28 kg)	0.001	075 Stainless Steel	11

▷ Parts Program (Non-Premier)

American Standard

Kitchen Sinks

Stainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Pekoe Collection 23" Single Bowl Sink	 18 gauge stainless steel Fabricated single bowl 10 mm radius corners Extra deep 10" (254 mm) bowl Under mount sink SoundSecure+[™] sound pads StoneLock[™] undercoating Bottom grid included Waste fitting included Sink clips included Nominal Dimensions: 23" x 18" x 10" (584 x 457 x 254 mm) Bowl Size: 21" (533 mm) wide 16" (406 mm) front-to-back 10" (254 mm) deep 				
18SB.10231800.075	Pekoe 23" Single Bowl SinkUnder mount sink	16 lbs (7.26 kg)	2.08	075 Stainless Steel	630
	Included Components:				
⊳ 7302282-401.0750A	Bottom grid	2.66 lbs	0.11	075 Stainless Steel	60
		(1.21 kg)		Steel	
9028000.075*	Waste fitting	0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
▷ 791676-100.0070A	Under mount sink clips (10)	0.62 lbs (0.28 kg)	0.001	075 Stainless Steel	11

▷ Parts Program (Non-Premier)

American Standard

Kitchen Sinks

Stainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Pekoe Collection 17" Single Bowl Sink	 18 gauge stainless steel Fabricated single bowl 10 mm radius corners 8" (203 mm) deep bowl Under mount sink SoundSecure+[™] sound pads StoneLock[™] undercoating Bottom grid included Waste fitting included Sink clips included Nominal Dimensions: 17" x 17" x 8" (432 x 432 x 203 mm) Bowl Size: 15" (381 mm) wide 15" (381 mm) front-to-back 8" (203 mm) deep 	0			
18SB.8171700.075	Pekoe 17" Single Bowl SinkUnder mount sink	10.8 lbs (4.91 kg)	1.32	075 Stainless Steel	525
	Included Components:				
⊳7302288-401.0750A	Bottom grid	1.83 lbs (0.83 kg)	0.07	075 Stainless Steel	50
9028000.075*	Waste fitting	0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
⊳ 791676-100.0070A	Under mount sink clips (10)	0.62 lbs (0.28 kg)	0.001	075 Stainless Steel	11

 \triangleright Parts Program (Non-Premier)

American Standard

Kitchen Sinks

Stainless Steel	DESCRIPTION	NET WEIGHT	NET	COLORS	LIST Price
Pekoe Collection 35" Double Bowl Sink	 18 gauge stainless steel Fabricated double bowl 10 mm radius corners 9" (229 mm) deep bowls Under mount sink SoundSecure+[™] sound pads StoneLock[™] undercoating Two bottom grids included Two bottom grids included Sink clips included Sink clips included Nominal Dimensions: 35" x 18" x 9" (889 x 457 x 229 mm) Bowl Size: Each Bowl 16" (406 mm) wide 16" (406 mm) front-to-back 9" (229 mm) deep 				
18DB.9351800.075	Pekoe 35" Double Bowl SinkUnder mount sink	24.2 lbs (11 kg)	3.02	075 Stainless Steel	730
	Included Components:				
⊳ 7302285-401.0750A	Bottom grid	4.05 lbs (1.83 kg)	0.15	075 Stainless Steel	101
9028000.075*	Waste fitting	0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
⊳ 791676-100.0070A	Under mount sink clips (10)	0.62 lbs (0.28 kg)	0.001	075 Stainless Steel	11

▷ Parts Program (Non-Premier)

American Standard

Kitchen Sinks

Stainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Pekoe Collection 35" Combination Sink	 18 gauge stainless steel Fabricated offset double bowls 10 mm radius corners 9" (229 mm) deep bowls Under mount sink SoundSecure+[™] sound pads StoneLock[™] undercoating Two bottom grids included Two waste fittings included Sink clips included Nominal Dimensions: 35" x 18" x 9" (889 x 457 x 229 mm) Left Bowl Size: 21" (533 mm) wide 16" (406 mm) front-to-back 9" (229 mm) deep Right Bowl Size: 11" (279 mm) wide 16" (406 mm) front-to-back 9" (229 mm) deep 				
18CR.9351800.075	Pekoe 35" Combination Sink • Under mount sink	24.9 lbs (11.3 kg)	3.02	075 Stainless Steel	730
⊳ 7302298-401.0750A	Included Components: Bottom grid set (left and right)	4.18 lbs (1.90 kg)	0.21	075 Stainless Steel	101
		(1.50 kg)			
9028000.075*	Waste fitting	0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
⊳ 791676-100.0070A Ø SR Map	Under mount sink clips (10)	0.62 lbs (0.28 kg)	0.001	075 Stainless Steel	11

▷ Parts Program (Non-Premier)

Pekoe

Kitchen Sinks

Stainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Pekoe Collection 29" Double Bowl Sink	 18 gauge stainless steel Fabricated double bowl 10 mm radius corners 9" (229 mm) deep bowls Under mount sink SoundSecure+[™] sound pads StoneLock[™] undercoating Two bottom grids included Two waste fittings included Sink clips included Nominal Dimensions: 29" x 18" x 9" (737 x 457 x 229 mm) Bowl Size: Each Bowl 13" (330 mm) wide 16" (406 mm) front-to-back 9" (229 mm) deep 				
18DB.9291800.075	Pekoe 29" Double Bowl SinkUnder mount sink	21.6 lbs (9.78 kg)	3.02	075 Stainless Steel	683
	Included Components:				
⊳ 7302287-401.0750A	Bottom grid	3.56 lbs (1.61 kg)	0.11	075 Stainless Steel	83
9028000.075*	Waste fitting	0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
⊳ 791676-100.0070A Ø SR Map	Under mount sink clips (10)	0.62 lbs (0.28 kg)	0.001	075 Stainless Steel	11

▷ Parts Program (Non-Premier)

American Standard

Kitchen Sinks

Stainless Steel	DESCRIPTION		NET WEIGHT	PTS	COLORS	LIST PRICE
Pekoe Collection 29" Double Bowl ADA Sink	 18 gauge stainless steel Fabricated double bowl 10 mm radius corners Offset drains 6" (152 mm) deep bowls Under mount sink SoundSecure+[™] sound pads StoneLock[™] undercoating Two bottom grids included Two waste fittings included Sink clips included Nominal Dimensions: 29" x 18" x 6" (737 x 457 x 152 mm) Bowl Size: 13" (330 mm) wide 16" (406 mm) front-to-back 6" (152 mm) deep 	Â				
18DB.6291800.075	Pekoe 29" Double Bowl ADA Sink Under mount sink 			2.35	075 Stainless Steel	659
	Included Components:					
⊳ 7302287-401.0750A	Bottom grid		3.56 lbs (1.61 kg)	0.11	075 Stainless Steel	83
9028000.075*	Waste fitting		0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
⊳ 791676-100.0070A	Under mount sink clips (10)		0.62 lbs (0.28 kg)	0.001	075 Stainless Steel	11

▷ Parts Program (Non-Premier)

Kitchen Sinks

Edgewater

tainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
dgewater Collection " Single Bowl Sink	 18 gauge stainless steel Fabricated single bowl 9" (229 mm) deep bowl Dual mount sink (top or under) Zero radius corners SoundSecure+[™] sound pads StoneLock[™] undercoating Bottom grid included Waste fitting included Single hole Sink clips included Nominal Dimensions: 33" x 22" x 9" (838 x 559 x 229 mm) Bowl Size: 30-1/4" (768 mm) wide 16-1/2" (419 mm) front-to-back 				
	• 9" (229 mm) deep			1 1	
18SB.9332211.075	Edgewater 33" Single Bowl Sink Dual mount sink (top or under) 	23.4 lbs (10.6 kg)	3.27	075 Stainless Steel	556
	Included Components:				
⊳ 7434000.075	Bottom grid	2.23 lbs (1.01 kg)	0.24	075 Stainless Steel	126
9028000.075*	Waste fitting	0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
⊳ 791637-100.0070A	Top mount sink clips (10)	0.33 lbs (0.15 kg)	0.001	075 Stainless Steel	11
⊳791676-100.0070A	Under mount sink clips (10)	0.62 lbs (0.28 kg)	0.001	075 Stainless Steel	11

▷ Parts Program (Non-Premier)

American Standard

Edgewater

Kitchen Sinks

Stainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
dgewater Collection B" Single Bowl ADA Sink	 18 gauge stainless steel Fabricated single bowl 6" (152 mm) deep bowl Offset drain Dual mount sink (top or under) Zero radius corners SoundSecure+[™] sound pads StoneLock[™] undercoating Bottom grid included Waste fitting and sink clips included Single hole 		the course of a		
	Nominal Dimensions: • 33" x 22" x 6" (838 x 559 x 152 mm)			6	
	Bowl Size: • 30-1/4" (768 mm) wide • 16-1/2" (419 mm) front-to-back • 6" (152 mm) deep				
18SB.6332211.075	Edgewater 33" Single Bowl ADA Sink • Dual mount sink (top or under)		2.54	075 Stainless Steel	546
	Included Components:			1	
⊳ 7434000.075	Bottom grid	2.23 lbs (1.01 kg)	0.24	075 Stainless Steel	126
9028000.075*	Waste fitting	0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
⊳ 791637-100.0070A	Top mount sink clips (10)	0.33 lbs (0.15 kg)	0.001	075 Stainless Steel	11
⊳ 791676-100.0070A	Under mount sink clips (10)	0.62 lbs (0.28 kg)	0.001	075 Stainless Steel	11

▷ Parts Program (Non-Premier)

American Standard

Kitchen Sinks

Edgewater

Stainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Edgewater Collection 25" Single Bowl Sink	 18 gauge stainless steel Fabricated single bowl 9" (229 mm) deep bowl Dual mount sink (top or under) Zero radius corners SoundSecure+[™] sound pads StoneLock[™] undercoating Bottom grid included Waste fitting included Single hole Nominal Dimensions: 25" x 22" x 9" (635 x 559 x 229 mm) Bowl Size: 22-1/4" (565 mm) wide 16-1/2" (419 mm) front-to-back 9" (229 mm) deep 				
18SB.9252211.075	Edgewater 25" Single Bowl Sink • Dual mount sink (top or under)	17.8 lbs (8.07 kg)	3.27	075 Stainless Steel	525
	Included Components:				
⊳ 7302289-401.0750A	Bottom grid	2.13 lbs (0.97 kg)	0.14	075 Stainless Steel	63
9028000.075*	Waste fitting	0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
⊳ 791637-100.0070A	Top mount sink clips (10)	0.33 lbs (0.15 kg)	0.001	075 Stainless Steel	11
	Under mount sink clips (10)	0.62 lbs	0.001	075 Stainless	11

▷ Parts Program (Non-Premier)

American Standard

Kitchen Sinks

Stainless Steel	DESCRIPTION		NET WEIGHT	PTS	COLORS	LIST PRICE
Edgewater Collection 25" Single Bowl ADA Sink	 18 gauge stainless steel Fabricated single bowl 6" (152 mm) deep bowl Offset drain Dual mount sink (top or under) Zero radius corners SoundSecure+[™] sound pads StoneLock[™] undercoating Bottom grid included Waste fitting included Single hole Nominal Dimensions: 25" x 22" x 6" (635 x 559 x 152 mm) Bowl Size: 22-1/4" (565 mm) wide 16-1/2" (419 mm) front-to-back 6" (152 mm) deep 	Â				
18SB.6252211.075	Edgewater 25" Single Bowl ADA Sink • Dual mount sink (top or under)			2.54	075 Stainless Steel	567
	Included Components:					
⊳7302289-401.0750A	Bottom grid		2.13 lbs (0.97 kg)	0.14	075 Stainless Steel	63
9028000.075*	Waste fitting		0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
⊳ 791637-100.0070A	Top mount sink clips (10)		0.33 lbs (0.15 kg)	0.001	075 Stainless Steel	11
⊳ 791676-100.0070A	Under mount sink clips (10)		0.62 lbs (0.28 kg)	0.001	075 Stainless Steel	11

▷ Parts Program (Non-Premier)

American Standard

Kitchen Sinks

Stainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
dgewater Collection 3" Double Bowl Sink	 18 gauge stainless steel Fabricated double bowl 9" (229 mm) deep bowls Dual mount sink (top or under) Zero radius corners SoundSecure+[™] sound pads StoneLock[™] undercoating Two bottom grids included Two bottom grids included Sink clips included Single hole Nominal Dimensions: 33" x 22" x 9" (838 x 559 x 229 mm) Each Bowl Size: 14-5/8" (372 mm) wide 16-5/8" (422 mm) front-to-back 9" (229 mm) deep 				
18DB.9332211.075	Edgewater 33" Double Bowl Sink • Dual mount sink (top or under)	27.3 lbs (12.4 kg)	3.27	075 Stainless Steel	573
	Included Components:				
⊳7302290-401.0750A	Bottom grid	3.83 lbs (1.74 kg)	0.14	075 Stainless Steel	135
9028000.075*	Waste fitting	0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
⊳791637-100.0070A	Top mount sink clips (10)	0.33 lbs (0.15 kg)	0.001	075 Stainless Steel	11
▷ 791676-100.0070A	Under mount sink clips (10)	0.62 lbs (0.28 kg)	0.001	075 Stainless Steel	11

▷ Parts Program (Non-Premier)

Edgewater

Edgewater

Kitchen Sinks

Stainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Edgewater Collection 33" Double Bowl ADA Sink	 18 gauge stainless steel Fabricated double bowl 6" (152 mm) deep bowls Offset drain Dual mount sink (top or under) Zero radius corners SoundSecure+[™] sound pads StoneLock[™] undercoating Two bottom grids included Two waste fittings included Single hole Nominal Dimensions: 33" x 22" x 6" (838 x 559 x 152 mm) Each Bowl Size: 14-5/8" (372 mm) wide 16-5/8" (422 mm) front-to-back 6" (152 mm) deep 				
18DB.6332211.075	Edgewater 33" Double Bowl ADA Sink • Dual mount sink (top or under)		2.54	075 Stainless Steel	603
	Included Components:				
⊳ 7302290-401.0750A	Bottom grid	3.83 lbs (1.74 kg)	0.14	075 Stainless Steel	135
9028000.075*	Waste fitting	0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
⊳ 791637-100.0070A	Top mount sink clips (10)	0.33 lbs (0.15 kg)	0.001	075 Stainless Steel	11
⊳ 791676-100.0070A Ø SR Map	Under mount sink clips (10)	0.62 lbs (0.28 kg)	0.001	075 Stainless Steel	11

▷ Parts Program (Non-Premier)

American Standard

Kitchen Sinks

Stainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Portsmouth Collection 30" Single Bowl Sink	 18 gauge stainless steel Stamped single bowl 9" (229 mm) deep bowl Under mount sink SoundSecure+[™] sound pads StoneLock[™] undercoating Waste fitting included Sink clips included Nominal Dimensions: 29-3/4" x 18" x 9" (756 x 457 x 229 mm) Bowl Size: 27-3/4" (705 mm) wide 16-1/4" (413 mm) front-to-back 9" (229 mm) deep 			A	
18SB.9301800S.075	Portsmouth 30" Single Bowl SinkUnder mount sink	11.91 lbs (5.38 kg)	3.02	075 Stainless Steel	525
	Included Components:				
9028000.075*	Waste fitting	0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
⊳ 791676-100.0070A	Under mount sink clips (10)	0.62 lbs (0.28 kg)	0.001	075 Stainless Steel	11
	Optional Accessory:			1	
8459.301800.075	Bottom grid	2.4 lbs (1.1 kg)	0.15	075 Stainless Steel	126

▷ Parts Program (Non-Premier)

* Non-Premier Product

American Standard

Kitchen Sinks

Stainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST RICE
Portsmouth Collection 30" Single Bowl ADA Sink	 18 gauge stainless steel Stamped single bowl 6" (152 mm) deep bowl Offset drain Under mount sink SoundSecure+[™] sound pads StoneLock[™] undercoating Waste fitting included Sink clips included Nominal Dimensions: 29-3/4" x 18" x 6" (756 x 457 x 152 mm) Bowl Size: 27-3/4" (705 mm) wide 16-1/4" (413 mm) front-to-back 6" (152 mm) deep 			Al-	
18SB.6301800S.075	Portsmouth 30" Single Bowl ADA SinkUnder mount sink		3.02	075 Stainless Steel	489
	Included Components:				
9028000.075*	Waste fitting	0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
⊳ 791676-100.0070A	Under mount sink clips (10)	0.62 lbs (0.28 kg)	0.001	075 Stainless Steel	11
	Optional Accessory:				
8459.301800.075	Bottom grid	2.4 lbs (1.1 kg)	0.15	075 Stainless Steel	126

▷ Parts Program (Non-Premier)

* Non-Premier Product

American Standard

Kitchen Sinks

Portsmouth

Stainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Portsmouth Collection 23" Single Bowl Sink	 18 gauge stainless steel Stamped single bowl 9" (229 mm) deep bowl Under mount sink SoundSecure+[™] sound pads StoneLock[™] undercoating Waste fitting included Sink clips included Nominal Dimensions: 23-3/8" x 17-3/4" x 9" (594 x 451 x 229 mm) Bowl Size: 21-3/8" (543 mm) wide 16" (406 mm) front-to-back 9" (229 mm) deep 				
18SB.9231800S.075	Portsmouth 23" Single Bowl SinkUnder mount sink	9.1 lbs (4.12 kg)	1.63	075 Stainless Steel	420
	Included Components:				
9028000.075*	Waste fitting	0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
⊳ 791676-100.0070A	Under mount sink clips (10)	0.62 lbs (0.28 kg)	0.001	075 Stainless Steel	11
	Optional Accessory:				
8452.231700.075	Bottom grid	1.8 lbs (0.83 kg)	0.11	075 Stainless Steel	110

▷ Parts Program (Non-Premier)

American Standard

Kitchen Sinks

Stainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
ortsmouth Collection B" Single Bowl DA Sink	 18 gauge stainless steel Stamped single bowl 6" (152 mm) deep bowl Under mount sink SoundSecure+[™] sound pads StoneLock[™] undercoating Waste fitting included Sink clips included Nominal Dimensions: 23-3/8" x 17-3/4" x 6" (594 x 451 x 152 mm) Bowl Size: 21-3/8" (543 mm) wide 16" (406 mm) front-to-back 				
18SB.6231800S.075	• 6" (152 mm) deep Portsmouth 23" Single Bowl ADA Sink		1.63	075 Stainless	391
1003.02310000.013	Under mount sink		1.00	Steel	001
	Included Components:			11	
9028000.075*	Waste fitting	0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
⊳ 791676-100.0070A	Under mount sink clips (10)	0.62 lbs (0.28 kg)	0.001	075 Stainless Steel	11

▷ Parts Program (Non-Premier)

Portsmouth



Kitchen Sinks

Stainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Portsmouth Collection 23" Single Bowl Sink	 18 gauge stainless steel Stamped single bowl 9" (229 mm) deep bowl Under mount sink SoundSecure+[™] sound pads StoneLock[™] undercoating Waste fitting included Sink clips included Nominal Dimensions: 23-1/8" × 21" × 9" (587 x 533 x 229 mm) Bowl Size: 21-1/4" (540 mm) wide 18-7/8" (479 mm) front-to-back 9" (229 mm) deep 				
18SB.9232100S.075	Portsmouth 23" Single Bowl SinkUnder mount sink	9.5 lbs (4.31 kg)	1.96	075 Stainless Steel	441
	Included Components:				
9028000.075*	Waste fitting	0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
⊳ 791676-100.0070A	Under mount sink clips (10)	0.61 lbs (0.28 kg)	0.001	075 Stainless Steel	11
	Optional Accessory:				1
8449.232100D.075	Bottom grid	2 lbs (0.92 kg)	0.17	075 Stainless Steel	100

 \triangleright Parts Program (Non-Premier)

* Non-Premier Product

American Standard

Kitchen Sinks

Stainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Portsmouth Collection 18" Single Bowl Sink	 18 gauge stainless steel Stamped single bowl 9" (229 mm) deep bowl Under mount sink SoundSecure+[™] sound pads StoneLock[™] undercoating Waste fitting included Sink clips included Nominal Dimensions: 17-7/8" x 16" x 9" (454 x 406 x 229 mm) Bowl Size: 15-7/8" (403 mm) wide 13-7/8" (352 mm) front-to-back 9" (229 mm) deep 				
18SB.9181600S.075	Portsmouth 18" Single Bowl SinkUnder mount sink		1.19	075 Stainless Steel	400
	Included Components:				
9028000.075*	Waste fitting	0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
⊳ 791676-100.0070A	Under mount sink clips (10)	0.62 lbs (0.28 kg)	0.001	075 Stainless Steel	11
	Optional Accessory:				1
8448.181600.075	Bottom grid	1.2 lbs (0.56 kg)	0.07	075 Stainless Steel	100

▷ Parts Program (Non-Premier)

American Standard

Kitchen Sinks

Stainless Steel	DESCRIPTION		NET WEIGHT	PTS	COLORS	LIST Price
Portsmouth Collection 18" Single Bowl ADA Sink	 18 gauge stainless steel Stamped single bowl 6" (152 mm) deep bowl Under mount sink SoundSecure+[™] sound pads StoneLock[™] undercoating Waste fitting included Sink clips included Nominal Dimensions: 17-7/8" x 16" x 6" (454 x 406 x 152 mm) Bowl Size: 	(DA)				
	 15-7/8" (403 mm) wide 13-7/8" (352 mm) front-to-back 6" (152 mm) deep 					
18SB.6181600S.075	Portsmouth 18" Single Bowl ADA Sink • Under mount sink			1.19	075 Stainless Steel	371
	Included Components:					
9028000.075*	Waste fitting		0.6 lbs 0.27 kg)	0.02	075 Stainless Steel	21
⊳791676-100.0070A	Under mount sink clips (10)		0.62 lbs 0.28 kg)	0.001	075 Stainless Steel	11
	Optional Accessory:					
8448.181600.075	Bottom grid		1.2 lbs 0.56 kg)	0.07	075 Stainless Steel	100

▷ Parts Program (Non-Premier)

Portsmouth

Kitchen Sinks

Stainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Portsmouth Collection 16" Round Bar Sink	 18 gauge stainless steel Stamped single bowl 7" (178 mm) deep bowl Under mount sink SoundSecure+[™] sound pads StoneLock[™] undercoating Waste fitting included Sink clips included Nominal Dimensions: 16-1/8" x 7" (410 x 178 mm) Bowl Size: 14-1/2" (368 mm) round 7" (178 mm) deep 				
18SB.7001600S	Portsmouth 16" Round Bar Sink • Under mount sink	5.3 lbs (2.4 kg)	1.17	075 Stainless Steel	315
	Included Components:				
9028000.075*	Waste fitting	0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
⊳ 791676-100.0070A	Under mount sink clips (10)	0.62 lbs (0.28 kg)	0.001	075 Stainless Steel	11
	Optional Accessory:				
8442.001600.075	Bottom grid	1.03 lbs (0.45 kg)	0.06	075 Stainless Steel	88

▷ Parts Program (Non-Premier)

Portsmouth

Kitchen Sinks

Stainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Portsmouth Collection 32" Double Bowl Sink	 18 gauge stainless steel Stamped double bowl 9" (229 mm) deep bowls Under mount sink SoundSecure+[™] sound pads StoneLock[™] undercoating Two waste fittings included Sink clips included Nominal Dimensions: 32-1/4" x 18-1/2" x 9" (819 x 470 x 229 mm) Each Bowl Size: 14-3/4" (375 mm) wide 16-5/8" (422 mm) front-to-back 9" (229 mm) deep 				
18DB.9311800S.075	 Portsmouth 32" Double Bowl Sink 32" (813 mm) double bowl sink Under mount sink 	13 lbs (5.9 kg)	3.02	075 Stainless Steel	578
	Included Components:				
9028000.075*	Waste fitting	0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
⊳ 791676-100.0070A	Under mount sink clips (10)	0.62 lbs (0.28 kg)	0.001	075 Stainless Steel	11
	Optional Accessory:			1	
8447.311800.075	Bottom grid	1.3 lbs (1.59 kg)	0.07	075 Stainless Steel	84

 \triangleright Parts Program (Non-Premier)

Portsmouth

Kitchen Sinks

Stainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Portsmouth Collection 32" Double Bowl ADA Sink	 18 gauge stainless steel Stamped double bowl 6" (152 mm) deep bowls Offset drain Under mount sink SoundSecure+[™] sound pads StoneLock[™] undercoating Two waste fittings included Sink clips included 				
	Nominal Dimensions: • 32-1/4" x 18-1/2" x 6" (819 x 470 x 152 mm)				
	Each Bowl Size: • 14-3/4" (375 mm) wide • 16-5/8" (422 mm) front-to-back • 6" (152 mm) deep				
18DB.6311800S.075	Portsmouth 32" Double Bowl ADA Sink • Under mount sink		3.02	075 Stainless Steel	510
	Included Components:				
9028000.075*	Waste fitting	0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
⊳ 791676-100.0070A	Under mount sink clips (10)	0.62 lbs (0.28 kg)	0.001	075 Stainless Steel	11
	Optional Accessory:	11		11	
8447.311800.075	Bottom grid	1.3 lbs (1.59 kg)	0.07	075 Stainless Steel	84

▷ Parts Program (Non-Premier)

* Non-Premier Product

American Standard

Kitchen Sinks

Portsmouth

Stainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Portsmouth Collection 31-1/2" Combination Sink	 18 gauge stainless steel Stamped offset double bowl 9" (229 mm) deep bowl (left) 7-1/2" (191 mm) deep bowl (right) Under mount sink SoundSecure+[™] sound pads StoneLock[™] undercoating Two waste fittings included Sink clips included Nominal Dimensions: 31-1/2" x 20-1/2" x 9"/7-1/2" (800 x 521 x 229 mm/191 mm) Left Bowl Size: 15-1/2" (394 mm) wide 18-5/8" (473 mm) front-to-back 9" (229 mm) deep Right Bowl Size: 12-3/4" (324 mm) wide 16-3/8" (416 mm) front-to-back 7-1/2" (191 mm) deep 		0		
18CR.9322100S.075	Portsmouth 31-1/2" Combination Sink • Under mount sink	12.8 lbs (5.8 kg)	3.02	075 Stainless Steel	578
	Included Components:				
9028000.075*	Waste fitting	0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
⊳791676-100.0070A	Under mount sink clips (10)	0.62 lbs (0.28 kg)	0.001	075 Stainless Steel	11
	Optional Accessories::				
8446.312000L.075	Bottom grid (left)	1.6 lbs (0.73 kg)	0.09	075 Stainless Steel	84
8446.312000S.075	Bottom grid (right)	1.3 lbs (0.58 kg)	0.06	075 Stainless Steel	73

▷ Parts Program (Non-Premier)

American Standard

Reliant[®]

Stainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Reliant Collection 30" Single Bowl Sink	 18 gauge stainless steel Stamped single bowl 9" (229 mm) deep bowl Under mount sink SoundSecure[™] sound pads StoneLock[™] undercoating Waste fitting included Sink clips included 				
	Nominal Dimensions: • 30" x 18" x 9" (762 x 457 x 229 mm)				
	Bowl Size: • 28" (712 mm) wide • 15-15/16" (405 mm) front-to-back • 9" (229 mm) deep				
18SB.9301800T.075	Reliant 30" Single Bowl Sink Under mount sink 	22 lbs (9.96 kg)	2.64	075 Stainless Steel	315
	Included Components:				
9028000.075*	Waste fitting	0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
Ø SR MAP ▷ 791676-100.0070A	Under mount sink clips (10)	0.62 lbs (0.28 kg)	0.001	075 Stainless Steel	11

▷ Parts Program (Non-Premier)

Reliant®

Kitchen Sinks

stainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	list Price
Reliant Collection 32" Double Bowl Sink	 18 gauge stainless steel Stamped double bowl 9" (229 mm) deep bowl Under mount sink SoundSecure[™] sound pads StoneLock[™] undercoating Two waste fittings included Sink clips included 				
	Nominal Dimensions: • 32" x 18" x 9" (813 x 457 x 229 mm)				
	Each Bowl Size: • 14-7/16" (366 mm) wide • 16" (407 mm) front-to-back • 9" (229 mm) deep				
18DB.9321800T.075	Reliant 32" Double Bowl Sink • Under mount sink	22 lbs (9.96 kg)	2.64	075 Stainless Steel	342
	Included Components:				
9028000.075*	Waste fitting	0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
SRI MAP ▷ 791676-100.0070A	Under mount sink clips (10)	0.62 lbs (0.28 kg)	0.001	075 Stainless Steel	11

▷ Parts Program (Non-Premier)

American Standard

Reliant[®]

Kitchen Sinks

Stainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Reliant Collection 31" Combination Sink	 18 gauge stainless steel Stamped offset double bowl 9" (229 mm) deep bowl Under mount sink SoundSecure[™] sound pads StoneLock[™] undercoating Two waste fittings included Sink clips included Nominal Dimensions: 31" x 20" x 9" (787 x 508 x 229 mm) 				
	Left Bowl Size: • 15-5/16" (389 mm) wide • 18" (458 mm) front-to-back • 9" (229 mm) deep				
	Right Bowl Size: • 12-9/16" (319 mm) wide • 15-15/16" (404 mm) front-to-back • 7-1/2" (190 mm) deep				
18CR.9312000T.075	Reliant 31" Combination SinkUnder mount sink	22 lbs (9.96 kg)	2.64	075 Stainless Steel	342
	Included Components:				
9028000.075*	Waste fitting	0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
⊳ 791676-100.0070A	Under mount sink clips (10)	0.62 lbs (0.28 kg)	0.001	075 Stainless Steel	11
	Optional Accessory:	11			
7433000.075	Bottom grid set (2)		0.14	075 Stainless Steel	137

▷ Parts Program (Non-Premier)

Kitchen Sink/Faucet Systems

Colony®

Stainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Colony 25" Single Bowl Sink Vith Colony PRO Single Control Faucet System	Colony 25" Single Bowl Sink With Colony PRO Single Control Faucet System	13.7 lbs (6.21 kg)	2.29	075 Stainless Steel	347
20SB.8252283C.075	SYSTEM INCLUDES				
	Colony 25" Single Bowl Kitchen Sink				
	20SB.8252283S.075 (See page 59)				
	 20 gauge stainless steel Stamped single bowl 8" (203 mm) deep bowl Top mount sink SoundSecure[™] sound pads StoneLock[™] undercoating Three-hole Waste fitting included Sink clips included 				
	Nominal Dimensions: • 25" x 22" x 8" (635 x 559 x 203 mm)				
	Bowl Size: • 21-1/4" (540 mm) wide • 15-3/4" (400 mm) front-to-back • 8" (203 mm) deep				
	Colony PRO Single Control Kitchen Faucet With Deck Plate				
	7074000.075* (See page 319)				
	 Stainless steel finish Ceramic disc valve cartridge (40 mm) 1.5 gpm/5.7 L/min maximum flow Brass swivel spout Metal deck plate and metal lever handle Integrated braided supply lines 				
	ADA				
	Included Components:			11	
9028000.075*	Waste fitting	0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
▷ 791637-100.0070A	Top mount sink clips (10)	0.33 lbs (0.15 kg)	0.001	075 Stainless Steel	11

> Parts Program (Non-Premier)

Kitchen Sink/Faucet Systems

Stainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Prici
Colony 25" Single Bowl NDA Sink With Colony PRO Single Control Faucet System	Colony 25" Single Bowl ADA Sink With Colony PRO Single Control Faucet System	11.8 lbs (5.35 kg)	2.29	075 Stainless Steel	310
22SB.6252283C.075	SYSTEM INCLUDES				
	Colony 25" Single Bowl ADA Kitchen Sink				
	22SB.6252283S.075 (See page 60)				
	 20 gauge stainless steel Stamped single bowl 6" (152 mm) deep bowl Top mount sink SoundSecure[™] sound pads StoneLock[™] undercoating Three-hole Waste fitting included Sink clips included 				
	Nominal Dimensions: • 25" x 22" x 6" (635 x 559 x 152 mm)				
	Bowl Size: • 21-1/4" (540 mm) wide • 15-3/4" (400 mm) front-to-back • 6" (152 mm) deep				
	ADA				
	Colony PRO Single Control Kitchen Faucet With Deck Plate				
	 7074000.075* (See page 319) Stainless steel finish Ceramic disc valve cartridge (40 mm) 1.5 gpm/5.7 L/min maximum flow Brass swivel spout Metal deck plate and metal lever handle Integrated braided supply lines 				
	ADA				
	Included Components:				
9028000.075*	Waste fitting	0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
> 791637-100.0070A	Top mount sink clips (10)	0.33 lbs (0.15 kg)	0.001	075 Stainless Steel	11

▷ Parts Program (Non-Premier)

Colony

American Standard

Kitchen Sink/Faucet Systems

Colony®

Stainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	list Price
Colony 33" Double Bowl Sink Vith Colony PRO Single Control Faucet System	Colony 33" Double Bowl Sink With Colony PRO Single Control Faucet System	19.1 lbs (8.66 kg)	2.29	075 Stainless Steel	383
20DB.8332283C.075	SYSTEM INCLUDES				
	<u>Colony 33" Double Bowl</u> <u>Kitchen Sink</u>				
	20DB.8332283S.075 (See page 62)				
	 20 gauge stainless steel Stamped double bowl 8" (203 mm) deep bowls Top mount sink SoundSecure[™] sound pads StoneLock[™] undercoating Three-hole Two waste fittings included Sink clips included 				
	Nominal Dimensions: • 33" x 22" x 8" (838 x 559 x 203 mm)				
	Each Bowl Size: • 14" (356 mm) wide • 16" (406 mm) front-to-back • 8" (203 mm) deep				
	Colony PRO Single Control Kitchen Faucet With Deck Plate				
	7074000.075* (See page 319)				
	 Stainless steel finish Ceramic disc valve cartridge (40 mm) 1.5 gpm/5.7 L/min maximum flow Brass swivel spout Metal deck plate and metal lever handle Integrated braided supply lines 				
	Included Components:				
9028000.075*	Waste fitting	0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
▷ 791637-100.0070A	Top mount sink clips (10)	0.33 lbs (0.15 kg)	0.001	075 Stainless Steel	11

 \triangleright Parts Program (Non-Premier)

American Standard

Kitchen Sink/Faucet Systems

Stainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Colony 33" Double Bowl DA Sink With Colony PRO Single Control Faucet System	Colony 33" Double Bowl ADA Sink With Colony PRO Single Control Faucet System	14.6 lbs (6.62 kg)	2.29	075 Stainless Steel	352
22DB.6332283C.075	SYSTEM INCLUDES				
	Colony 33" Double Bowl ADA Kitchen Sink				
	22DB.6332283S.075 (See page 63) • 20 gauge stainless steel • Stamped double bowl • 6" (152 mm) deep bowls • Top mount sink • SoundSecure [™] sound pads • StoneLock [™] undercoating • Three-hole • Two waste fittings included • Sink clips included				
	Nominal Dimensions: • 33" x 22" x 6" (838 x 559 x 152 mm)				
	Each Bowl Size: • 14" (356 mm) wide • 16" (406 mm) front-to-back • 6" (152 mm) deep				
	ADA .				
	Colony PRO Single Control Kitchen Faucet With Deck Plate 7074000.075* (See page 319)				
	 Stainless steel finish Ceramic disc valve cartridge (40 mm) 1.5 gpm/5.7 L/min maximum flow Brass swivel spout Metal deck plate and metal lever handle Integrated braided supply lines 				
	ADA				
	Included Components:				
9028000.075*	Waste fitting	0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
⊳ 791637-100.0070A	Top mount sink clips (10)	0.33 lbs (0.15 kg)	0.001	075 Stainless Steel	11

▷ Parts Program (Non-Premier)

Colony

Kitchen Sinks

Stainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Colony Collection 25" Single Bowl Sink	 20 gauge stainless steel Stamped single bowl 8" (203 mm) deep bowl Top mount sink SoundSecure[™] sound pads StoneLock[™] undercoating Waste fitting included Sink clips included Nominal Dimensions: 25" x 22" x 8" (635 x 559 x 203 mm) Bowl Size: 21-1/4" (540 mm) wide 15-1/8" (384 mm) front-to-back 8" (203 mm) deep 				
20SB.8252283S.075	Colony 25" Single Bowl Sink • 3-hole sink	10.3 lbs (4.67 kg)	2.29	075 Stainless Steel	258
20SB.8252284S.075	Colony 25" Single Bowl Sink 4-hole sink 	10.3 lbs (4.67 kg)	2.29	075 Stainless Steel	258
	Included Components:				
9028000.075*	Waste fitting	0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
Ø SR MAP ▷ 791637-100.0070A	Top mount sink clips (10)	0.33 lbs (0.15 kg)	0.001	075 Stainless Steel	11

▷ Parts Program (Non-Premier)

American Standard

Stainless Steel	DESCRIPTION		. PTS	COLORS	LIST Price	
Colony Collection 25" Single Bowl ADA Sink	 20 gauge stainless steel Stamped single bowl 6" (152 mm) deep bowl Top mount sink SoundSecure[™] sound pads StoneLock[™] undercoating Waste fitting included Sink clips included Nominal Dimensions: 25" x 22" x 6" (635 x 559 x 152 mm) Bowl Size: 21-1/4" (540 mm) wide 15-1/8" (384 mm) front-to-back 6" (152 mm) deep 					
22SB.6252283S.075	Colony 25" Single Bowl ADA Sink 3-hole sink 	8.4 lbs (3.8 kg		075 Stainless Steel	210	
22SB.6252284S.075	Colony 25" Single Bowl ADA Sink 4-hole sink 	8.4 lbs (3.8 kg		075 Stainless Steel	210	
	Included Components:					
9028000.075*	Waste fitting	0.6 lbs (0.27 kg		075 Stainless Steel	21	
Ø SR MAP ▷ 791637-100.0070A	Top mount sink clips (10)	0.33 lb (0.15 kg		075 Stainless Steel	11	

▷ Parts Program (Non-Premier)

Colony

Kitchen Sinks

Stainless Steel	DESCRIPTION		NET WEIGHT	PTS	COLORS	LIST PRICE
Colony Collection 15" Single Bowl ADA Sink	 20 gauge stainless steel Stamped single bowl 6" (152 mm) deep bowl Top mount sink SoundSecure[™] sound pads StoneLock[™] undercoating Waste fitting included Sink clips included Nominal Dimensions: 15" x 15" x 6" (381 x 381 x 152 mm) Bowl Size: 12-1/4" (311 mm) wide 10-1/4" (260 mm) front-to-back 6" (152 mm) deep 	(Å)				
22SB.6151511S.075	Colony 15" Single Bowl ADA Sink 1-hole sink 		7.4 lbs (3.36 kg)	0.69	075 Stainless Steel	158
	Included Components:					
9028000.075*	Waste fitting		0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
Ø SR MAP ▷ 791637-100.0070A	Top mount sink clips (10)		0.33 lbs (0.15 kg)	0.001	075 Stainless Steel	11

> Parts Program (Non-Premier)

American Standard

Kitchen Sinks

Stainless Steel	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Colony Collection 33" Double Bowl Sink	 20 gauge stainless steel Stamped double bowl 8" (203 mm) deep bowls Top mount sink SoundSecure[™] sound pads StoneLock[™] undercoating Two waste fittings included Sink clips included Nominal Dimensions: 33" x 22" x 8" (838 x 559 x 203 mm) Each Bowl Size: 14" (356 mm) wide 16" (406 mm) front-to-back 8" (203 mm) deep 				
20DB.8332283S.075	Colony 33" Double Bowl Sink 3-hole sink 	15.7 lbs (7.12 kg)	2.29	075 Stainless Steel	273
20DB.8332284S.075	Colony 33" Double Bowl Sink • 4-hole sink	15.7 lbs (7.12 kg)	2.29	075 Stainless Steel	273
	Included Components:				
9028000.075*	Waste fitting	0.6 lbs (0.27 kg)	0.02	075 Stainless Steel	21
▷ 791637-100.0070A	Top mount sink clips (10)	0.33 lbs (0.15 kg)	0.001	075 Stainless Steel	11

▷ Parts Program (Non-Premier)

Colony

Kitchen Sinks

Stainless Steel	DESCRIPTION		NET NEIGHT	PTS	COLORS	LIST PRICE
 Colony Collection 33" Double Bowl ADA Sink ● 20 gauge stainless steel ● Stamped double bowl ● 6" (152 mm) deep bowls ● Top mount sink ● SoundSecure[™] sound pads ● StoneLock[™] undercoating ● Two waste fittings included ● Sink clips included ● Sink c		À				
22DB.6332283S.075	Colony 33" Double Bowl ADA Sink • 3-hole sink		1.2 lbs 5.08 kg)	2.29	075 Stainless Steel	247
22DB.6332284S.075	Colony 33" Double Bowl ADA Sink • 4-hole sink		1.2 lbs 5.08 kg)	2.29	075 Stainless Steel	247
	Included Components:					
9028000.075*	Waste fitting		0.6 lbs).27 kg)	0.02	075 Stainless Steel	21
⊳ 791637-100.0070A	Top mount sink clips (10)		0.33 lbs 0.15 kg)	0.001	075 Stainless Steel	11

 \triangleright Parts Program (Non-Premier)

American Standard

Safer and Accessible Living

Remodeling a bathroom so you or someone in your family can remain at home? Or is a parent moving in? Or has a new baby arrived? American Standard offers a wide-ranging collection of products designed to provide style, safety and comfort over a lifetime. We've got more than a few patented ideas you won't see elsewhere. Check out our exclusive safer and accessible products.

For more information visit:

http://www.americanstandard-us.com/safe-and-accessible



Safe and Easy Faucets ADA-approved lever faucets allow easy operation without the need to grip.



Storage

Accessible and functional storage, keeps items out of the way and area free from hazards.



Right Height[®] Toilets 16-1/2" (419 mm) rim height allows for easier and more comfortable use.



American Standard

Safer and Accessible

Independent, Safer and Comfortable Bathing

American Standard, an industry leader and original manufacturer of acrylic Walk-in baths, makes it easy to enter and exit the bath giving the user the freedom to enjoy a luxurious bathing experience in privacy, safety and comfort.

With thoughtful standard features, a variety of sizes and options and high quality craftsmanship, all of our Walk-in baths are expertly designed to provide accessible and comfortable bathing experiences.

Exclusive Innovations

Patented Quick Drain®

- · Fast water removal system
- · Ties directly into the standard drain system
- No additional plumbing required

Watertight Door System Technology

- Ergonomic, easy to use handle
- Lifetime warranty on seal





Fast draining less waiting






Quality and innovation built into every bath




Patented Door System Technology 5 Tub extender for easy with a lifetime warranty on the door's watertight seal




17" (432 mm) chair height seat




4 Built-in grab bar



Plumbing and fixture access panels







Walk-in bath hydrotherapy options



Soaker Bath Provides a warm relaxing soak



Invigorating water jets target key areas



Air Spa System Soothina cascade of warm air bubbles

Combination System

Combines all of the features of the Soaker Tub, the Whirlpool Massage and the Air Spa System for the ultimate therapeutic bathing experience

American Standard

19.5	

Acrylic 32" x 60" x 37" (813 x 1524 x 940 mm)

Luxury Series Acrylic Walk-in Baths

- DESCRIPTION
 - Neck pillow
 - Chromatherapy multi-colored
 - light system[†] 13 Water jets*
 - 26 Air jets[‡]
 - Ozone sanitation* •
 - Legs-only massage setting*
 - Extension kit to fit 60" (1524 mm) •
 - space, not included with the 32" x 60" Premium faucet with multi-function •
 - handheld shower in polished chrome included with some models

L - LINEN

1975		1
		 -

- Premium cast acrylic construction Patented Quick Drain® fast water
- removal system Warranty: lifetime on the door seal
- 15 years on the tub shell - 10 years on components
- Patented watertight door system
- Built-in 17" (432 mm) chair height seat
- Built-in color-matched grab bar
- Textured tub floor

NET

Color-matched waste and overflow

W - WHITE

- Freestanding metal support frame
- In-line water heater*

Acrylic 32 X 00 X 37 (613 X 1524 X 940 IIIII)	INCI					
Walk-in Baths – Faucet included	WEIGHT	SKU	LIST PRICE	SKU	LIST PRICE	
Soaking Bath – left-hand drain	224 lbs	3260.219.SLW	8,979	3260.219.SLL	8,979	
Soaking Bath – right-hand drain	(102 kg)	3260.219.SRW	8,979	3260.219.SRL	8,979	
Whirlpool Massage System – left-hand drain	248 lbs	3260.219.WLW	10,697	3260.219.WLL	10,697	
Whirlpool Massage System – right-hand drain	(112 kg)	3260.219.WRW	10,697	3260.219.WRL	10,697	
Air Spa System – left-hand drain	240 lbs	3260.219.ALW	11,155	3260.219.ALL	11,155	
Air Spa System – right-hand drain	(109 kg)	3260.219.ARW	11,155	3260.219.ARL	11,155	
Combination System – left-hand drain	264 lbs	3260.219.CLW	11,981	3260.219.CLL	11,981	
Combination System – right-hand drain	(120 kg)	3260.219.CRW	11,981	3260.219.CRL	11,981	
Acrylic 32" x 60" x 37" (813 x 1524 x 940 mm) Wa	alk-in Baths – I	FAUCET NOT INCL	UDED			
Soaking Bath – left-hand drain	224 lbs	3260.215.SLW	8,550	3260.215.SLL	8,550	
Soaking Bath – right-hand drain	(102 kg)	3260.215.SRW	8,550	3260.215.SRL	8,550	
Whirlpool Massage System – left-hand drain	248 lbs	3260.215.WLW	10,269	3260.215.WLL	10,269	
Whirlpool Massage System – right-hand drain	(112 kg)	3260.215.WRW	10,269	3260.215.WRL	10,269	
Air Spa System – left-hand drain	240 lbs	3260.215.ALW	10,727	3260.215.ALL	10,727	
Air Spa System – right-hand drain	(109 kg)	3260.215.ARW	10,727	3260.215.ARL	10,727	
Combination System – left-hand drain	264 lbs	3260.215.CLW	11,552	3260.215.CLL	11,552	
Combination System – right-hand drain	(120 kg)	3260.215.CRW	11,552	3260.215.CRL	11,552	
Acrylic 30" x 51" x 37" (762 x 1295 x 940 mm) Wa	alk-in Baths – I	Faucet included				
Soaking Bath – left-hand drain	186 lbs	3051.119.SLW	8,062	3051.119.SLL	8,062	
Soaking Bath – right-hand drain	(84) kg	3051.119.SRW	8,062	3051.119.SRL	8,062	
Whirlpool Massage System – left-hand drain	210 lbs	3051.119.WLW	9,895	3051.119.WLL	9,895	
Whirlpool Massage System – right-hand drain	(95 kg)	3051.119.WRW	9,895	3051.119.WRL	9,895	
Air Spa System – left-hand drain	202 lbs	3051.119.ALW	10,353	3051.119.ALL	10,353	
Air Spa System – right-hand drain	(92 kg)	3051.119.ARW	10,353	3051.119.ARL	10,353	
Combination System – left-hand drain	226 lbs	3051.119.CLW	11,178	3051.119.CLL	11,178	
Combination System – right-hand drain	(103 kg)	3051.119.CRW	11,178	3051.119.CRL	11,178	
Acrylic 30" x 51" x 37" (762 x 1295 x 940 mm) Wa	alk-in Baths – I	FAUCET NOT INCL	UDED			
Soaking Bath – left-hand drain	186 lbs	3051.115.SLW	7,634	3051.115.SLL	7,634	
Soaking Bath – right-hand drain	(84) kg	3051.115.SRW	7,634	3051.115.SRL	7,634	
Whirlpool Massage System – left-hand drain	210 lbs	3051.115.WLW	9,467	3051.115.WLL	9,467	
Whirlpool Massage System – right-hand drain	(95 kg)	3051.115.WRW	9,467	3051.115.WRL	9,467	

Air Spa System – left-hand drain 202 lbs 3051.115.ALW 9,925 3051.115.ALL 9,925 Air Spa System - right-hand drain 3051.115.ARW 9,925 3051.115.ARL 9,925 (92 kg) Combination System - left-hand drain 226 lbs 3051.115.CLW 10.750 3051.115.CLL 10.750 Combination System - right-hand drain 3051.115.CRW 10.750 3051.115.CRL 10.750 (103 kg)

See page 74 for all available options.

Continued on next page.

NOTE: American Standard Walk-in Baths cannot be combined with any other American Standard product orders and are not eligible for any rebates or other discount programs. For more information or to place orders please call: 1-866-423-0800 or fax: 888-872-3044 *Only available on Whirlpool and Combination Systems †Only available on Combination Systems

[‡]Only available on Air Spa and Combination Systems

American Standard

Luxury Series Acrylic Walk-in Baths

DESCRIPTION



· Premium cast acrylic construction • Patented Quick Drain® fast water

- removal system
- Warranty: lifetime on the door seal
 - 15 years on the tub shell
 - 10 years on components
- Patented watertight door system
- Built-in 17" (432 mm) chair height seat
- Built-in color-matched grab bar
- Textured tub floor •

٠

- · Color-matched waste and overflow
- Freestanding metal support frame
- In-line water heater*

- Neck pillow
- Chromatherapy multi-colored
- light system[†]
- 13 Water jets*
- 26 Air jets[‡]
- Ozone sanitation*
- Legs-only massage setting*
- ٠ Extension kit to fit 60" (1524 mm) space, not included with the 32" x 60"
- Premium faucet with multi-function handheld shower in polished chrome included with some models

Acrylic 28" x 48" x 37" (711 x 1219 x 940	mm)
Walk-in Baths – Faucet included	

Acrylic 28" x 48" x 37" (711 x 1219 x 940 mm)	NET	W - WH	IITE	L – LINEN		
Walk-in Baths – Faucet included	WEIGHT	SKU	LIST PRICE	SKU	LIST PRICE	
Soaking Bath – left-hand drain	160 lbs	2848.119.SLW	7,554	2848.119.SLL	7,554	
Soaking Bath – right-hand drain	(73 kg)	2848.119.SRW	7,554	2848.119.SRL	7,554	
Whirlpool Massage System – left-hand drain	184 lbs	2848.119.WLW	9,273	2848.119.WLL	9,273	
Whirlpool Massage System – right-hand drain	(83 kg)	2848.119.WRW	9,273	2848.119.WRL	9,273	
Air Spa System – left-hand drain	176 lbs	2848.119.ALW	9,731	2848.119.ALL	9,731	
Air Spa System – right-hand drain	(80 kg)	2848.119.ARW	9,731	2848.119.ARL	9,731	
Combination System – left-hand drain	200 lbs	2848.119.CLW	10,556	2848.119.CLL	10,556	
Combination System – right-hand drain	(91 kg)	2848.119.CRW	10,556	2848.119.CRL	10,556	

Activitie 20 x 40 x 37 (711 x 1219 x 940 mini) waik-in Bauts – PAUCET NOT INCLUDED						

Soaking Bath – left-hand drain	160 lbs	2848.115.SLW	7,125	2848.115.SLL	7,125
Soaking Bath – right-hand drain	(73 kg)	2848.115.SRW	7,125	2848.115.SRL	7,125
Whirlpool Massage System – left-hand drain	184 lbs	2848.115.WLW	8,844	2848.115.WLL	8,844
Whirlpool Massage System – right-hand drain	(83 kg)	2848.115.WRW	8,844	2848.115.WRL	8,844
Air Spa System – left-hand drain	176 lbs	2848.115.ALW	9,303	2848.115.ALL	9,303
Air Spa System – right-hand drain	(80 kg)	2848.115.ARW	9,303	2848.115.ARL	9,303
Combination System – left-hand drain	200 lbs	2848.115.CLW	10,127	2848.115.CLL	10,127
Combination System – right-hand drain	(91 kg)	2848.115.CRW	10,127	2848.115.CRL	10,127

See page 74 for all available options.

NOTE: American Standard Walk-in Baths cannot be combined with any other American Standard product orders and are not eligible for any rebates or other discount programs. For more information or to place orders please call: 1-866-423-0800 or fax: 888-872-3044 *Only available on Whirlpool and Combination Systems [†]Only available on Combination Systems

[‡]Only available on Air Spa and Combination Systems

Premium Series	Gelcoat Walk-in Baths	
----------------	-----------------------	--

DESCRIPTION

- · Premium gelcoat construction
- Patented Quick Drain[®] fast water removal system
- Warranty: lifetime on the door seal
- 10 years on the tub shell
- 5 years on components
- Watertight door system •
- •
- Built-in color-matched grab bar •
- Color-matched waste and overflow • Textured tub floor •
- · Freestanding metal support frame

- Neck pillow
- Chromatherapy multi-colored light system[†]
- 13 Water jets*
- 26 Air jets[‡]
- Ozone sanitation*
- Legs-only massage setting*
- Built-in 17" (432 mm) chair height seat Extension kit to fit 60" (1524 mm) space, not included with the 30" x 60"
 - Premium faucet with multi-function handheld shower in polished chrome included with some models

Gelcoat 30" x 60" x 37" (762 x 1524 x 940 mm) Walk-in Baths – Faucet included	NET WEIGHT	W - WHITE		L - LINEN	
		SKU	LIST PRICE	SKU	LIST PRICE
Soaking Bath – left-hand drain	150 lbs	3060.109.SLW	7,676	3060.109.SLL	7,676
Soaking Bath – right-hand drain	(68 kg)	3060.109.SRW	7,676	3060.109.SRL	7,676
Vhirlpool Massage System – left-hand drain	174 lbs	3060.109.WLW	8,937	3060.109.WLL	8,937
Vhirlpool Massage System – right-hand drain	(79 kg)	3060.109.WRW	8,937	3060.109.WRL	8,937
Air Spa System – left-hand drain	166 lbs	3060.109.ALW	9,394	3060.109.ALL	9,394
Air Spa System – right-hand drain	(75 kg)	3060.109.ARW	9,394	3060.109.ARL	9,394
Combination System – left-hand drain	190 lbs	3060.109.CLW	10,220	3060.109.CLL	10,220
Combination System – right-hand drain	(86 kg)	3060.109.CRW	10,220	3060.109.CRL	10,220
Gelcoat 30" x 60" x 37" (762 x 1524 x 940 mm) W	alk-in Baths -	FAUCET NOT INC	LUDED		
Soaking Bath – left-hand drain	150 lbs	3060.105.SLW	7,247	3060.105.SLL	7,247
Soaking Bath – right-hand drain	(68 kg)	3060.105.SRW	7,247	3060.105.SRL	7,247
Whirlpool Massage System – left-hand drain	174 lbs	3060.105.WLW	8,508	3060.105.WLL	8,508
Whirlpool Massage System – right-hand drain	(79 kg)	3060.105.WRW	8,508	3060.105.WRL	8,508
∖ir Spa System – left-hand drain	166 lbs	3060.105.ALW	8,966	3060.105.ALL	8,966
∖ir Spa System – right-hand drain	(75 kg)	3060.105.ARW	8,966	3060.105.ARL	8,966
Combination System – left-hand drain	190 lbs	3060.105.CLW	9,791	3060.105.CLL	9,791
Combination System – right-hand drain	(86 kg)	3060.105.CRW	9,791	3060.105.CRL	9,791
Gelcoat 30" x 52" x 42" (762 x 1321 x 1067 mm) \	Walk-in Baths	- Faucet included			
Soaking Bath – left-hand drain	138 lbs	3052.109.SLW	6,644	3052.109.SLL	6,644
Soaking Bath – right-hand drain	(63 kg)	3052.109.SRW	6,644	3052.109.SRL	6,644
Whirlpool Massage System – left-hand drain	162 lbs	3052.109.WLW	8,027	3052.109.WLL	8,027
Whirlpool Massage System – right-hand drain	(73 kg)	3052.109.WRW	8,027	3052.109.WRL	8,027
Air Spa System – left-hand drain	154 lbs	3052.109.ALW	8,592	3052.109.ALL	8,592
Air Spa System – right-hand drain	(70 kg)	3052.109.ARW	8,592	3052.109.ARL	8,592
Combination System – left-hand drain	178 lbs	3052.109.CLW	9,417	3052.109.CLL	9,417
Combination System – right-hand drain	(81 kg)	3052.109.CRW	9,417	3052.109.CRL	9,417
Gelcoat 30" x 52" x 42" (762 x 1321 x 1067 mm) \	Walk-in Baths	- FAUCET NOT INC	CLUDED		
Soaking Bath – left-hand drain	138 lbs	3052.105.SLW	6,216	3052.105.SLL	6,216
Soaking Bath – right-hand drain	(63 kg)	3052.105.SRW	6,216	3052.105.SRL	6,216
Vhirlpool Massage System – left-hand drain	162 lbs	3052.105.WLW	7,599	3052.105.WLL	7,599
Vhirlpool Massage System – right-hand drain	(73 kg)	3052.105.WRW	7,599	3052.105.WRL	7,599
Air Spa System – left-hand drain	154 lbs	3052.105.ALW	8,164	3052.105.ALL	8,164
Air Spa System – right-hand drain	(70 kg)	3052.105.ARW	8,164	3052.105.ARL	8,164
Combination System – left-hand drain	178 lbs	3052.105.CLW	8,989	3052.105.CLL	8,989
Combination System – right-hand drain	(81 kg)	3052.105.CRW	8,989	3052.105.CRL	8,989

NOTE: American Standard Walk-in Baths cannot be combined with any other American Standard product orders and are not eligible for any rebates or other discount programs. For more information or to place orders please call: 1-866-423-0800 or fax: 888-872-3044 *Only available on Whirlpool and Combination Systems [†]Only available on Combination Systems [‡]Only available on Air Spa and Combination Systems

Walk-in Baths

68 List Price Guide 2020

American Standard

Premium Series Gelcoat Walk-in Baths

DESCRIPTION



- Premium gelcoat construction Patented Quick Drain[®] fast water
- removal system
- Warranty: lifetime on the door seal
 - 10 years on the tub shell
 - 5 years on components
- Watertight door system
- Built-in color-matched grab bar
- · Color-matched waste and overflow

W - WHITE

- Textured tub floor

NET

- Freestanding metal support frame
- In-line water heater*

- Neck pillow
- Chromatherapy multi-colored
- light system[†]
- 13 Water jets*
- 26 Air jets[‡]
- Ozone sanitation*
- Legs-only massage setting*
- Built-in 17" (432 mm) chair height seat Extension kit to fit 60" (1524 mm)
 - space, not included with the 30" x 60" Premium faucet with multi-function
 - handheld shower in polished chrome included with some models

L - LINEN

Gelcoat 28" x 48" x 38" (711 x 1219 x 965 mm)

WEIGHT				
WEIGHT	SKU	LIST PRICE	SKU	LIST PRICE
150 lbs	2848.109.SLW	6,350	2848.109.SLL	6,350
(68 kg)	2848.109.SRW	6,350	2848.109.SRL	6,350
175 lbs	2848.109.WLW	7,496	2848.109.WLL	7,496
(79 kg)	2848.109.WRW	7,496	2848.109.WRL	7,496
170 lbs	2848.109.ALW	7,955	2848.109.ALL	7,955
(77 kg)	2848.109.ARW	7,955	2848.109.ARL	7,955
195 lbs	2848.109.CLW	8,894	2848.109.CLL	8,894
(88 kg)	2848.109.CRW	8,894	2848.109.CRL	8,894
	(68 kg) 175 lbs (79 kg) 170 lbs (77 kg) 195 lbs	150 lbs (68 kg) 2848.109.SLW 2848.109.SRW 175 lbs (79 kg) 2848.109.WLW 2848.109.WRW 170 lbs (77 kg) 2848.109.ALW 2848.109.ARW 195 lbs 2848.109.CLW	150 lbs 2848.109.SLW 6,350 (68 kg) 2848.109.SRW 6,350 175 lbs 2848.109.WLW 7,496 (79 kg) 2848.109.WRW 7,496 170 lbs 2848.109.ALW 7,955 (77 kg) 2848.109.ALW 7,955 195 lbs 2848.109.CLW 8,894	150 lbs (68 kg) 2848.109.SLW 2848.109.SRW 6,350 6,350 2848.109.SLL 2848.109.SRL 175 lbs (79 kg) 2848.109.WLW 2848.109.WRW 7,496 7,496 2848.109.WLL 2848.109.WRL 170 lbs (77 kg) 2848.109.ALW 2848.109.ARW 7,955 7,955 2848.109.ALL 2848.109.ARL 195 lbs 2848.109.CLW 8,894 2848.109.CLL

Gelcoat 28" x 48" x 38" (711 x 1219 x 965 mm) Walk-in Baths - FAUCET NOT INCLUDED

Soaking Bath – left-hand drain	150 lbs	2848.105.SLW	5,922	2848.105.SLL	5,922
Soaking Bath – right-hand drain	(68 kg)	2848.105.SRW	5,922	2848.105.SRL	5,922
Whirlpool Massage System – left-hand drain	175 lbs	2848.105.WLW	7,068	2848.105.WLL	7,068
Whirlpool Massage System – right-hand drain	(79 kg)	2848.105.WRW	7,068	2848.105.WRL	7,068
Air Spa System – left-hand drain	170 lbs	2848.105.ALW	7,526	2848.105.ALL	7,526
Air Spa System – right-hand drain	(77 kg)	2848.105.ARW	7,526	2848.105.ARL	7,526
Combination System – left-hand drain	195 lbs	2848.105.CLW	8,465	2848.105.CLL	8,465
Combination System – right-hand drain	(88 kg)	2848.105.CRW	8,465	2848.105.CRL	8,465

See page 74 for all available options.

NOTE: American Standard Walk-in Baths cannot be combined with any other American Standard product orders and are not eligible for any rebates or other discount programs. For more information or to place orders please call: 1-866-423-0800 or fax: 888-872-3044

*Only available on Whirlpool and Combination Systems [†]Only available on Combination Systems

*Only available on Air Spa and Combination Systems

American Standard

Bathing

SR |

Premium Series Gelcoat Walk-in Baths with Outward Opening Door



Providing a safer and comfortable way for adults to bathe.

The watertight door swings outward to provide more room when entering and exiting the bath.

Allows for immediate access to the bather in the event of a medical emergency.

- Premium gelcoat construction
- Patented Quick Drain[®] fast water removal system
- Warranty: lifetime on the door seal

 10 years on the tub shell
 5 years on components
- Outward opening door
- Water tight door system

- Built-in chair height seat
- Built-in polished chrome grab bar
- Textured tub floor
- Freestanding metal support frame
- In-line water heater*
- Extension kit to fit 60" (1524 mm) space
- Neck pillow
- Chromatherapy multi-colored light system[†]

DESCRIPTION

- 12 Water jets*
- 26 Air jets[‡]
- Ozone sanitation*
- Legs-only massage setting*
- Premium faucet with multi-function
- handheld shower in polished chrome included with some models

Gelcoat 32" x 52" x 40" (813 x 1321 x 1016 mm) Walk-in Baths – Full Transfer Faucet included	NET	W - WHITE		L - LINEN	
	WEIGHT	SKU	LIST PRICE	SKU	LIST PRICE
Soaking Bath – left-hand drain	215 lbs	32520D.109.SLW-PC	7,167	32520D.109.SLL-PC	7,167
Soaking Bath – right-hand drain	(98 kg)	32520D.109.SRW-PC	7,167	32520D.109.SRL-PC	7,167
Whirlpool Massage System – left-hand drain	239 lbs	32520D.109.WLW-PC	8,686	32520D.109.WLL-PC	8,686
Whirlpool Massage System – right-hand drain	(108 kg)	32520D.109.WRW-PC	8,686	32520D.109.WRL-PC	8,686
Air Spa System – left-hand drain	231 lbs	32520D.109.ALW-PC	9,172	32520D.109.ALL-PC	9,172
Air Spa System – right-hand drain	(105 kg)	32520D.109.ARW-PC	9,172	32520D.109.ARL-PC	9,172
Combination System – left-hand drain	255 lbs	32520D.109.CLW-PC	9,381	32520D.109.CLL-PC	9,381
Combination System – right-hand drain	(116 kg)	32520D.109.CRW-PC	9,381	32520D.109.CRL-PC	9,381
Gelcoat 32" x 52" x 40" (813 x 1321 x 1016 mm) W	alk-in Baths	– Full Transfer – FAUC	CET NOT INC	LUDED	
Soaking Bath – left-hand drain	215 lbs	32520D.105.SLW-PC	6,739	32520D.105.SLL-PC	6,739
Soaking Bath – right-hand drain	(98 kg)	32520D.105.SRW-PC	6,739	32520D.105.SRL-PC	6,739
Whirlpool Massage System – left-hand drain	239 lbs	32520D.105.WLW-PC	8,257	32520D.105.WLL-PC	8,257
Whirlpool Massage System – right-hand drain	(108 kg)	32520D.105.WRW-PC	8,257	32520D.105.WRL-PC	8,257
Air Spa System – left-hand drain	231 lbs	32520D.105.ALW-PC	8,743	32520D.105.ALL-PC	8,743
Air Spa System – right-hand drain	(105 kg)	32520D.105.ARW-PC	8,743	32520D.105.ARL-PC	8,743
Combination System – left-hand drain	255 lbs	32520D.105.CLW-PC	8,952	32520D.105.CLL-PC	8,952
Combination System – right-hand drain	(116 kg)	32520D.105.CRW-PC	8,952	32520D.105.CRL-PC	8,952
See page 74 for all available options.				Continue	d on next page

NOTE: American Standard Walk-in Baths cannot be combined with any other American Standard product orders and are not eligible for any rebates or other discount programs. For more information or to place orders please call: 1-866-423-0800 or fax: 888-872-3044

*Only available on Whirlpool and Combination Systems *Only available on Air Spa and Combination Systems [†]Only available on Combination Systems

Continued on next page.

American Standard

Premium Series Gelcoat Walk-in Baths with Outward Opening Door



Providing a safer and comfortable way for adults to bathe.

The watertight door swings outward to provide more room when entering and exiting the bath.

Allows for immediate access to the bather in the event of a medical emergency.

DESCRIPTION

- Premium gelcoat construction
- Patented Quick Drain[®] fast water removal system
- Warranty: lifetime on the door seal

 10 years on the tub shell
- 5 years on components
- Outward opening door
- Water tight door system

- Built-in chair height seat
- Built-in polished chrome grab bar
- Textured tub floor
- Freestanding metal support frame
- In-line water heater*
- Extension kit to fit 60" (1524 mm) space
- Neck pillow
- Chromatherapy multi-colored light system[†]
- 12 Water jets*
- 26 Air jets[‡]
- Ozone sanitation*
- Legs-only massage setting*
- Premium faucet with multi-function handheld shower in polished chrome included with some models

Gelcoat 30" x 52" x 40" (762 x 1321 x 1016 mm)	NET	W - WHITE		L - LINEN			
Walk-in Baths – Partial Transfer Faucet included	WEIGHT	SKU	LIST PRICE	SKU	LIST PRICE		
Soaking Bath – left-hand drain	203 lbs	30520D.109.SLW-PC	6,638	30520D.109.SLL-PC	6,638		
Soaking Bath – right-hand drain	(92 kg)	30520D.109.SRW-PC	6,638	30520D.109.SRL-PC	6,638		
Whirlpool Massage System – left-hand drain	227 lbs	30520D.109.WLW-PC	8,156	30520D.109.WLL-PC	8,156		
Whirlpool Massage System – right-hand drain	(103 kg)	30520D.109.WRW-PC	8,156	30520D.109.WRL-PC	8,156		
Air Spa System – left-hand drain	219 lbs	30520D.109.ALW-PC	8,643	30520D.109.ALL-PC	8,643		
Air Spa System – right-hand drain	(99 kg)	30520D.109.ARW-PC	8,643	30520D.109.ARL-PC	8,643		
Combination System – left-hand drain	243 lbs	30520D.109.CLW-PC	8,852	30520D.109.CLL-PC	8,852		
Combination System – right-hand drain	(110 kg)	30520D.109.CRW-PC	8,852	30520D.109.CRL-PC	8,852		
Gelcoat 30" x 52" x 40" (762 x 1321 x 1016 mm) Wa	alk-in Baths	- Partial Transfer – FA		NCLUDED			
Soaking Bath – left-hand drain	203 lbs	30520D.105.SLW-PC	6,210	30520D.105.SLL-PC	6,210		
Soaking Bath – right-hand drain	(92 kg)	30520D.105.SRW-PC	6,210	30520D.105.SRL-PC	6,210		
Whirlpool Massage System – left-hand drain	227 lbs	30520D.105.WLW-PC	7,728	30520D.105.WLL-PC	7,728		
Whirlpool Massage System – right-hand drain	(103 kg)	30520D.105.WRW-PC	7,728	30520D.105.WRL-PC	7,728		
Air Spa System – left-hand drain	219 lbs	30520D.105.ALW-PC	8,214	30520D.105.ALL-PC	8,214		
Air Spa System – right-hand drain	(99 kg)	30520D.105.ARW-PC	8,214	30520D.105.ARL-PC	8,214		
Combination System – left-hand drain	243 lbs	30520D.105.CLW-PC	8,423	30520D.105.CLL-PC	8,423		
Combination System – right-hand drain	(110 kg)	30520D.105.CRW-PC	8,423	30520D.105.CRL-PC	8,423		

NOTE: American Standard Walk-in Baths cannot be combined with any other American Standard product orders and are not eligible for any rebates or other discount programs. For more information or to place orders please call: 1-866-423-0800 or fax: 888-872-3044

*Only available on Whirlpool and Combination Systems [†]Only available on Combination Systems

[‡]Only available on Air Spa and Combination Systems



SR

Walk-in Baths

Value Series Gelcoat Walk-in Baths

S. 1988 - Hereit

- · Premium gelcoat construction Patented Quick Drain[®] fast water
- removal system Warranty: lifetime on the door seal
- 10 years on the tub shell
- 5 years on components
- Easy access door system Built-in 17" (432 mm) chair height seat •
- Built-in color-matched grab bar
- Textured tub floor
- Freestanding metal support frame
- Extension kit to fit 60" (1524 mm)
- space, not included with the 30" x 60"

- Color-matched cable driven drain assembly
- SR
- In-line water heater*
- 8 Water jets*

DESCRIPTION

- 21 Air jets[†]
- Legs-only massage setting* • Premium faucet with handheld
- shower in polished chrome included

Gelcoat 30" x 60" x 37" (762 x 1524 x 940 mm)	NET	W - WH	IITE	L – LINEN		
Walk-in Baths	WEIGHT	SKU	LIST PRICE	SKU	LIST PRICE	
Soaking Bath – left-hand drain	175 lbs	3060.509.SLW	5,767	3060.509.SLL	5,767	
Soaking Bath – right-hand drain	(79 kg)	3060.509.SRW	5,767	3060.509.SRL	5,767	
Whirlpool Massage System – left-hand drain	200 lbs	3060.509.WLW	6,336	3060.509.WLL	6,336	
Whirlpool Massage System – right-hand drain	(91 kg)	3060.509.WRW	6,336	3060.509.WRL	6,336	
Air Spa System – left-hand drain	190 lbs	3060.509.ALW	6,731	3060.509.ALL	6,731	
Air Spa System – right-hand drain	(86 kg)	3060.509.ARW	6,731	3060.509.ARL	6,731	
Combination System – left-hand drain	215 lbs	3060.509.CLW	7,254	3060.509.CLL	7,254	
Combination System – right-hand drain	(98 kg)	3060.509.CRW	7,254	3060.509.CRL	7,254	
Gelcoat 30" x 52" x 42" (762 x 1321 x 1067 mm)	Walk-in Baths					
Soaking Bath – left-hand drain	152 lbs	3052.509.SLW	5,340	3052.509.SLL	5,340	
Soaking Bath – right-hand drain	(69 kg)	3052.509.SRW	5,340	3052.509.SRL	5,340	
Vhirlpool Massage System – left-hand drain	176 lbs	3052.509.WLW	6,014	3052.509.WLL	6,014	
Vhirlpool Massage System – right-hand drain	(80 kg)	3052.509.WRW	6,014	3052.509.WRL	6,014	
Air Spa System – left-hand drain	168 lbs	3052.509.ALW	6,501	3052.509.ALL	6,501	
Air Spa System – right-hand drain	(76 kg)	3052.509.ARW	6,501	3052.509.ARL	6,501	
Combination System – left-hand drain	192 lbs	3052.509.CLW	7,026	3052.509.CLL	7,026	
Combination System – right-hand drain	(87 kg)	3052.509.CRW	7,026	3052.509.CRL	7,026	
Gelcoat 28" x 48" x 38" (711 x 1219 x 965 mm) V	Valk-in Baths					
Soaking Bath – left-hand drain	150 lbs	2848.509.SLW	5,087	2848.509.SLL	5,087	
Soaking Bath – right-hand drain	(68 kg)	2848.509.SRW	5,087	2848.509.SRL	5,087	
Vhirlpool Massage System – left-hand drain	175 lbs	2848.509.WLW	5,705	2848.509.WLL	5,705	
Vhirlpool Massage System – right-hand drain	(79 kg)	2848.509.WRW	5,705	2848.509.WRL	5,705	
Air Spa System – left-hand drain	170 lbs	2848.509.ALW	6,136	2848.509.ALL	6,136	
Air Spa System – right-hand drain	(77 kg)	2848.509.ARW	6,136	2848.509.ARL	6,136	
Combination System – left-hand drain	195 lbs	2848.509.CLW	6,630	2848.509.CLL	6,630	
Combination System – right-hand drain	(88 kg)	2848.509.CRW	6,630	2848.509.CRL	6,630	

See page 74 for all available options.

NOTE: American Standard Walk-in Baths cannot be combined with any other American Standard product orders and are not eligible for any rebates or other discount programs. For more information or to place orders please call: 1-866-423-0800 or fax: 888-872-3044

*Only available on Whirlpool and Combination Systems [†]Only available on Combination Systems

[‡]Only available on Air Spa and Combination Systems

72 List Price Guide 2020

American Standard

Value Series Gelcoat Walk-in Baths



DESCRIPTION

- Premium gelcoat construction
- Patented Quick Drain[®] fast water removal system
- Warranty: lifetime on the door seal
 - 10 years on the tub shell
 - 5 years on components
- Outward opening door
- Water tight door system
- Built-in chair height seat
- Built-in polished chrome grab bar
- Textured tub floor

- Freestanding metal support frame
- Extension kit to fit 60" (1524 mm) space
- In-Line water heater included*
- 6 Water jets*
- 21 Air jets[†]
- Legs-only massage setting*
- Polished chrome jets
- Premium faucet with handheld shower in chrome included

Gelcoat 32" x 52" x 40" (813 x 1321 x 1016 mm)	NET	W - WHITE		L - LINEN		
Walk-in Baths – Full Transfer	WEIGHT	SKU	LIST PRICE	SKU	LIST PRICE	
Soaking Bath – left-hand drain	203 lbs	32520D.709.SLW-PC	6,494	32520D.709.SLL-PC	6,494	
Soaking Bath – right-hand drain	(92 kg)	32520D.709.SRW-PC	6,494	32520D.709.SRL-PC	6,494	
Whirlpool Massage System – left-hand drain	227 lbs	32520D.709.WLW-PC	7,585	32520D.709.WLL-PC	7,585	
Whirlpool Massage System – right-hand drain	(103 kg)	32520D.709.WRW-PC	7,585	32520D.709.WRL-PC	7,585	
Air Spa System – left-hand drain	219 lbs	32520D.709.ALW-PC	8,071	32520D.709.ALL-PC	8,071	
Air Spa System – right-hand drain	(99 kg)	32520D.709.ARW-PC	8,071	32520D.709.ARL-PC	8,071	
Combination System – left-hand drain	243 lbs	32520D.709.CLW-PC	8,602 32520D.709.CLL-I			
Combination System – right-hand drain	(110 kg)	32520D.709.CRW-PC	8,602 32520D.709.CRL-I			
Gelcoat 30" x 52" x 40" (762 x 1321 x 1016 mm) Wa	k-in Baths	 Partial Transfer 				
Soaking Bath – left-hand drain	203 lbs	30520D.709.SLW-PC	5,942	30520D.709.SLL-PC	5,942	
Soaking Bath – right-hand drain	(92 kg)	30520D.709.SRW-PC	5,942	30520D.709.SRL-PC	5,942	
Whirlpool Massage System – left-hand drain	227 lbs	30520D.709.WLW-PC	7,032	30520D.709.WLL-PC	7,032	
Whirlpool Massage System – right-hand drain	(103 kg)	30520D.709.WRW-PC	7,032	30520D.709.WRL-PC	7,032	
Air Spa System – left-hand drain	219 lbs	30520D.709.ALW-PC	7,518	30520D.709.ALL-PC	7,518	
Air Spa System – right-hand drain	(99 kg)	30520D.709.ARW-PC	7,518	30520D.709.ARL-PC	7,518	
Combination System – left-hand drain	243 lbs	30520D.709.CLW-PC	8,048	30520D.709.CLL-PC	8,048	
Combination System – right-hand drain	(110 kg)	30520D.709.CRW-PC	8,048	30520D.709.CRL-PC	8,048	
One many 74 for all sucilable antions						

See page 74 for all available options.

NOTE: American Standard Walk-in Baths cannot be combined with any other American Standard product orders and are not eligible for any rebates or other discount programs. For more information or to place orders please call: 1-866-423-0800 or fax: 888-872-3044

*Only available on Whirlpool and Combination Systems [†]Only available on Combination Systems

[‡]Only available on Air Spa and Combination Systems

American Standard

The watertight door swings outward to provide more room when entering and exiting the bath.

Allows for immediate access to the bather in the event of a medical emergency.

[SR]

Separate Options:		White	Linen	Chrome	Othe
9FHS-CH19	Chrome fast-fill tub filler with shower wand and diverter 3/4" (19 mm) valves			749	
9ILH	1500 Watt In-line heater				318
9NR	Neck rest for 3252OD models				54
9NRGRIP	Neck rest with grip for all models except 3252OD models				57
9HSB	Hand shower slide bar system – includes 24" (610 mm) grab bar and hand shower glide			133	
9GB-24	24" (610 mm) wall-mounted decorative chrome grab bar			92	
End Panels – All end p	anels must be FACTORY INSTALLED	1			
9EP-28.F	Acrylic end panel for model 2848 on faucet side	318	318		
9EP-28.S	Acrylic end panel for model 2848 on seat side	318	318		
9EP-30.F	Acrylic end panel for model 3051 on faucet side	318	318		
9EP-30.S	Acrylic end panel for model 3051 on seat side	318	318		
9EP-32.F	Acrylic end panel for model 3260 on faucet side	318	318		
9EP-32.S	Acrylic end panel for model 3260 on seat side	318	318		
Back Panels – All back	panels must be FACTORY INSTALLED	1	1	1	
9BP-28	Acrylic back panel for model 2848	318	318		
9BP-30	Acrylic back panel for model 3051	318	318		
9BP-32	Acrylic back panel for model 3260	318	318		

74 List Price Guide 2020



Seated Shower



The American Standard seated shower fits in the space of a standard bathtub and features a built-in, chair-height seat perfect for anyone having difficulty standing in the shower.

Fully open on one side, the seat allows easy transfer in and out of the shower. In addition to the easy access 3" (76 mm) threshold, an innovative built-in wrap-around grab bar allows for safety and security anywhere in the shower.

The seated shower features durable and luxurious cast acrylic construction and is easy to install thanks to its freestanding metal frame with five adjustable leveling feet.

DESCRIPTION

- Premium cast acrylic construction
- · Factory installed on metal support frame
- Wide, full-sized, built-in contoured seat
- Allows for easy transfer into and out of the shower
- Wrap around grab bar system
- Integral tile flange
- Textured shower floor

Acrylic 30" x 60" x 37" (762 x 1524 x 940 mm)	NET	W - WHITE			
Walk-in Shower	WEIGHT	SKU	LIST PRICE		
Seated Shower – left-hand drain	150 lbs	3060SH.LW	2,678		
Seated Shower – right-hand drain	(68 kg)	3060SH.RW	2,678		

SR



Independent, Safer and Comfortable Bathing

Fully equipped, the Safety Tubs[®] SSA Entry Series offers all the latest in safety and comfort features bundled together at one low cost and backed by a lifetime warranty on the door seal, a 10-year warranty on the tub shell and a 5-year warranty on all other components.

Available in full size 60" x 30" and two smaller sizes that include our tub extender kit allowing you to retrofit into various alcove sizes.

SSA Entry Series® Safety Tubs



Exclusive Innovations



Watertight Door System Technology

- Ergonomic, easy to use handle
- Lifetime warranty on seal

Features and Benefits

Soaker Bath

• Provides a warm relaxing soak

Jet Massage System

- 6 Massage jets
- Advanced back and leg therapy

Air Massage System

- 21 seat and floor Air Massage jets
- Soothing cascade of warm air bubbles

Dual System

Combines the Jet Massage and Air Massage Systems

For more information visit www.americanstandard-us.com/safe-and-accessible/



American Standard

Safety Tubs



DESCRIPTION


Quality and innovation built into every bath

- Premium faucet and handheld showering wandWatertight Door System Technology ensures a water tight seal With a lifetime warranty
 Built-in 17" (432 mm) chair height seat
 Freestanding metal support frame – self leveling feet

- Built-in safety grab bar
 Tub extender kit is included with all tubs less than 60" in length use to retrofit into standard tub spaces
 Plumbing and fixture access panels
- Textured tub floor
- Low threshold

Gelcoat 60" x 30" x 37" (1524 x 762 x 940 mm)	NET	W - WI	IITE	BC - BISCUIT			
Walk in Baths	WEIGHT	SKU	LIST PRICE	SKU	LIST PRICE		
Soaking Bath – left-hand drain	220 lbs	SSA6030LS-WH	4,687	SSA6030LS-BC	4,687		
Soaking Bath – right-hand drain	(100 kg)	SSA6030RS-WH	4,687	SSA6030RS-BC	4,687		
Jet Massage System – left-hand drain	224 lbs	SSA6030LJ-WH	5,214	SSA6030LJ-BC	5,214		
Jet Massage System – right-hand drain	(111 kg)	SSA6030RJ-WH	5,214	SSA6030RJ-BC	5,214		
Air Massage System – left-hand drain	236 lbs	SSA6030LA-WH	5,441	SSA6030LA-BC	5,441		
Air Massage System – right-hand drain	(107 kg)	SSA6030RA-WH	5,441	SSA6030RA-BC	5,441		
Dual System – left-hand drain	260 lbs	SSA6030LD-WH	6,046	SSA6030LD-BC	6,046		
Dual System – right-hand drain	(118 kg)	SSA6030RD-WH	6,046	SSA6030RD-BC	6,046		
Gelcoat 52" x 30" x 42" (1321 x 762 x 1067 mm) W	alk-in Baths						
Soaking Bath – left-hand drain	203 lbs	SSA5230LS-WH	4,729	SSA5230LS-BC	4,729		
Soaking Bath – right-hand drain	(92 kg)	SSA5230RS-WH	4,729	SSA5230RS-BC	4,729		
Jet Massage System – left-hand drain	227 lbs	SSA5230LJ-WH	5,256	SSA5230LJ-BC	5,256		
Jet Massage System – right-hand drain	(103 kg)	SSA5230RJ-WH	5,256	SSA5230RJ-BC	5,256		
Air Massage System – left-hand drain	219 lbs	SSA5230LA-WH	5,408	SSA5230LA-BC	5,408		
Air Massage System – right-hand drain	(99 kg)	SSA5230RA-WH	5,408	SSA5230RA-BC	5,408		
Dual System – left-hand drain	243 lbs	SSA5230LD-WH	6,012	SSA5230LD-BC	6,012		
Dual System – right-hand drain	(110 kg)	SSA5230RD-WH	6,012	SSA5230RD-BC	6,012		
Gelcoat 48" x 28" x 38" (1219 x 711 x 965 mm) W	alk-in Baths						
Soaking Bath – left-hand drain	175 lbs	SSA4828LS-WH	4,007	SSA4828LS-BC	4,007		
Soaking Bath – right-hand drain	(79 kg)	SSA4828RS-WH	4,007	SSA4828RS-BC	4,007		
Jet Massage System – left-hand drain	199 lbs	SSA4828LJ-WH	4,534	SSA4828LJ-BC	4,534		
Jet Massage System – right-hand drain	(90 kg)	SSA4828RJ-WH	4,534	SSA4828RJ-BC	4,534		
Air Massage System – left-hand drain	191 lbs	SSA4828LA-WH	4,836	SSA4828LA-BC	4,836		
Air Massage System – right-hand drain	(87 kg)	SSA4828RA-WH	4,836	SSA4828RA-BC	4,836		
Dual System – left-hand drain	215 lbs	SSA4828LD-WH	5,290	SSA4828LD-BC	5,290		
Dual System – right-hand drain	(98 kg)	SSA4828RD-WH	5,290	SSA4828RD-BC	5,290		

Freestanding Soaking Tubs at a Glance...

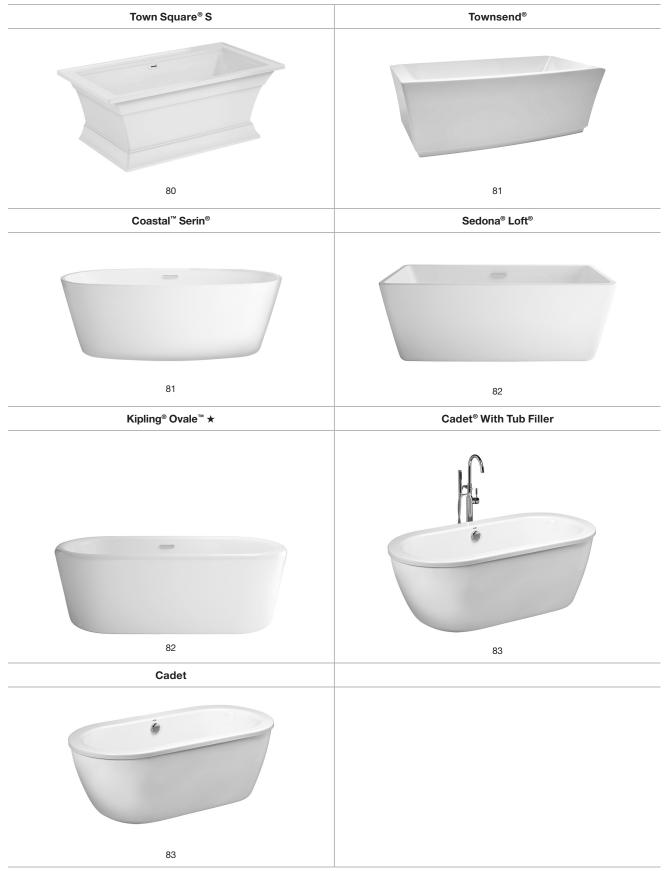



Indulge in Luxury and Style

Indulge in the luxury of one of American Standard's freestanding soaking tubs with styles ranging from traditional, casual, to modern. American Standard freestanding tubs provide a roomy bathing space but are compact enough to comfortably fit in the average-sized bathroom. Designed to create an elegant and luxurious bathroom focal point, American Standard freestanding tubs are the perfect option for your new home or bathroom remodel.

Freestanding tubs from American Standard are available with and without a bathtub filler faucet, built to last, with high-gloss, acrylic reinforced with fiberglass construction for a scratch-resistant shine and lasting durability.

Town Square® S Freestanding Soaking Tub



American Standard

Freestanding Soaking Tubs

Acrylic Bathtubs	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Town Square® S Freestanding Tub	 Traditional styling Straight back wall allows for optional "flush-to-the-wall" installation, leaving no space to trap dust or debris High-quality seamless acrylic one-piece construction with fiberglass reinforcement Center drain 17" (432mm) soaking depth for a relaxing deep soak bathing experience Wide deck can accommodate a Roman tub filler or store toiletries Integrated tub drain Adjustable leveling feet for easy installation Steel structural support frame Removable access panel on back of tub UV stable and stain resistant surface Easy to clean high-gloss surface Coordinates with Town Square S bathroom suite making a complete bathroom remodel easier Limited lifetime warranty Nominal Dimensions: 68" x 36" x 24-7(16" (1727 x 915 x 620 mm) 				
	• 68" x 36" x 24-7/16" (1727 x 915 x 620 mm)	and the	The second		and a
2546004	Town Square S Freestanding Tub	163 lbs (74 kg)	21.56	020 White	3,232
	Separate Component:	1		1	
755495-201.0200A	Access panel			020 White	131
	Required Component:	1			
1614.305*	Overflow cover with tap activated pop-up drain		0.08	002 Polished Chrome 013 Polished Nickel 278 Legacy Bronze 295 Brushed Nickel	146 205 220 205
See page 337 for freestanding tub					

* Non-Premier Product

American Standard

Freestanding Soaking Tubs

Acrylic Bathtubs	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price				
Freestanding Tub	 Contemporary styling Straight back wall allows for optional "flush-to-the-wall" installation, leaving no space to trap dust or debris High-quality seamless acrylic one-piece construction with fiberglass reinforcement Wide deck can accommodate a Roman tub filler Integrated tub drain Center drain Adjustable leveling feet Stainless steel support frame Easy to clean high-gloss surface Removable access panel on back of tub Coordinates with Townsend bathroom suite Limited lifetime warranty 								
	Nominal Dimensions: • 68" x 36" x 24" (1727 x 915 x 610 mm)								
2691.004	Townsend Freestanding Tub	151 lbs (69 kg)	21.56	020 White	3,039				
	Separate Component:								
755179-201.0200A	Access panel	1.77 lbs (0.8 kg)	0.01	020 White	70				
	Required Component:								
1582.000*	Overflow cover with tap activated pop-up drain		0.08	002 Polished Chrome 013 Polished Nickel 243 Matte Black 278 Legacy Bronze 295 Brushed Nickel	113 159 202 159 170				
Coastal [™] Serin [®] Freestanding Tub	 High-quality seamless acrylic one-piece construction with fiberglass reinforcement Integrated tub drain Large slotted overflow Center drain Adjustable leveling feet for easy installation Stainless steel support frame Easy to clean high-gloss surface Limited lifetime warranty Ships with removable polished chrome overflow cover and toe-tap drain (Other finishes available. Order separately.) Nominal Dimensions: 68-3/4" x 31-1/4" x 23-5/8" (1746 x 794 x 600 mm) 								
2765.034	Coastal Serin Freestanding Tub	150 lbs (68 kg)	16.17	020 White	2,98				
	Optional Component:								
1680.100*	Overflow cover with tap activated pop-up drain		0.06	013 Polished Nickel 243 Matte Black 278 Legacy Bronze 295 Brushed Nickel	111 202 118 113				

See page 337 for freestanding tub fillers. See page 331 for roman tub fillers.

* Non-Premier Product

American Standard

Freestanding Soaking Tubs

Acrylic Bathtubs	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Sedona [®] Loft [®] Rectangle Freestanding Tub	 High-quality seamless acrylic one-piece construction with fiberglass reinforcement Integrated tub drain Large slotted overflow Center drain Adjustable leveling feet for easy installation Stainless steel support frame Easy to clean high-gloss surface Limited lifetime warranty Ships with removable polished chrome overflow cover and toe-tap drain (Other finishes available. Order separately.) Nominal Dimensions: 62-3/4" x 29-7/8" x 22-7/8" (1594 x 759 x 581 mm) 				
2766.034	Sedona Loft Rectangle Freestanding Tub	150 lbs (68 kg)	15.28	020 White	2,780
	Optional Component:			-	
1680.100*	Overflow cover with tap activated pop-up drain			013 Polished Nickel 243 Matte Black 278 Legacy Bronze 295 Brushed Nickel	111 202 118 113
Kipling [®] Ovale [™] Freestanding Tub	 High-quality seamless acrylic one-piece construction with fiberglass reinforcement Integrated tub drain Large slotted overflow Center drain Adjustable leveling feet for easy installation Stainless steel support frame Easy to clean high-gloss surface Limited lifetime warranty Ships with removable polished chrome overflow cover and toe-tap drain (Other finishes available. Order separately.) Nominal Dimensions: 69-5/8" x 31-3/4" x 23-5/8" (1768 x 806 x 600 mm) 				
★2767.03 4	Kipling Ovale Freestanding Tub	156 lbs (71 kg)	16.17	020 White	2,571
	Optional Component:				
1680.100*	Overflow cover with tap activated pop-up drain			013 Polished Nickel 243 Matte Black 278 Legacy Bronze 295 Brushed Nickel	111 202 118 113

See page 337 for freestanding tub fillers.

* Non-Premier Product

American Standard

Freestanding Soaking Tubs

Acrylic Bathtubs	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Cadet [®] Freestanding Tub With Drain and Freestanding Tub Filler	 High-gloss acrylic with fiberglass reinforcement Two-piece construction Drain off center Available with tub kit included – tub filler with handheld shower Drain and overflow cover included Drain assembly included Nominal Dimensions: 66" x 32" x 23" (1676 x 813 x 584 mm) 				
2764.014M202	 Cadet Freestanding Tub With Polished Chrome Finish Filler and Drain Kit Includes polished chrome tub filler and handheld shower Polished chrome drain and overflow cover included 	150 lbs (68 kg)	20.37	011 Arctic	2,285
2764.014M203	Cadet Freestanding Tub With Brushed Nickel Finish Filler and Drain Kit • Includes brushed nickel tub filler and handheld shower • Brushed nickel drain and overflow cover included	150 lbs (68 kg)	20.37	011 Arctic	2,463
754766-200.0110A	Separate Component:	.68 lbs	0.01	011 Arctic	136
	Access panel	(0.31 kg)	0.01	UTT AICtic	130
Cadet Freestanding Tub With Drain	 High-gloss acrylic with fiberglass reinforcement Two-piece construction Drain off center Drain and overflow cover included Drain assembly included Nominal Dimensions: 66" x 32" x 23" (1676 x 813 x 584 mm) 				
2764.014	Cadet Freestanding Tub Chrome Finish • Does not include tub filler and handheld shower • Polished chrome drain and overflow cover included	132 lbs (60 kg)	20.37	011 Arctic	1,812
2764.014M204	Cadet Freestanding Tub Brushed Nickel Finish Does not include tub filler and handheld shower Brushed Nickel drain and overflow cover	132 lbs (60 kg)	20.37	011 Arctic	1,936
	included				

See page 337 for freestanding tub fillers.

American Standard

Baths and Whirlpools

			MODELS					
Luxury Series 🖉	Nominal Dimensions ^D	Soaking Tub/ Bathing Pool	EverClean® Air Bath	EverClean® Whirlpool	EcoSilent® Whirlpool			
5' x 30" Apron Front Acrylic Models								
Studio®	60" x 30" x 18" (1524 x 762 x 457 mm)	2973.102 ^R 2973.202 ^L						
Town Square S®	60" x 30" x 19" (1524 x 762 x 457 mm)	2545102 [₽] 2545202 [∟]						
5' x 30" Apron Front, Above Floor Ro	ough							
Studio	60" x 30" x 18" (1524 x 762 x 457 mm)	2573.102 ^в 2573.202 [∟]						
5' x 30" Fold Over Edge Acrylic Mode	els							
Studio	60" x 30" x 18" (1524 x 8762 x 457 mm)	2973.112-RH0 ^R 2973.212-LH0 ^L						
5' x 32" Apron Front Acrylic Models								
Evolution®	60" x 32" x 21-1/2" (1524 x 813 x 546 mm)	2425V-RH0.002 ^R 2425V-LH0.002 ^L	2425.168C ^R 2425.268C ^L	2425VC-RH0 ^R 2425VC-LH0 ^L	_			
Studio	60" x 32" x 18" (1524 x 813 x 457 mm)	2946.102 ^R 2946.202 ^L						
Town Square S	60" x 32" x 19" (1524 x 813 x 457 mm)	2544102 ^R 2544202 ^L	_					
5' x 32" Apron Front, Above Floor Ro	ough							
Studio	60" x 32" x 18" (1524 x 813 x 457 mm)	2574.102 [₽] 2574.202 [∟]						
5' x 32" Fold Over Edge Acrylic Mode	els							
Studio	60" x 32" x 18" (1524 x 813 x 457 mm)	2946.112-RH0 ^R 2946.212-LH0 ^L						
5' x 32" Acrylic Models								
• Evolution	60" x 32" x 21-1/2" (1524 x 813 x 546 mm)	2422V.002	2422.068C	2422VC	_			
∘ Studio	60" x 32" x 22-1/2" (1524 x 813 x 572 mm)	2932.002-D0 2932.002-D2		_				
5' x 36" Acrylic Models								
• Evolution	60" x 36" x 21-1/2" (1524 x 914 x 546 mm)	2771V.002	2771.068C	2771VC	_			
∘ Green Tea®	60" x 36" x 21" (1524 x 914 x 533 mm)	3571.002		_	3571.048WC			
∘ Studio	60" x 36" x 22-1/2" (1524 x 914 x 572 mm)	2934.002-D0 2934.002-D2		_	_			
5' x 42" Acrylic Models								
∘ Green Tea	60" x 42" x 21" (1524 x 1067 x 533 mm)	3574.002	_	_	3574.048WC			
° Town Square®	59-1/2" x 41-5/8" x 23" (1511 x 1057 x 584 mm)	2748.002	2748.068C	_	2748.048WC			

NOTES:

R – Right side drain

L – Left side drain

D - Check product spec sheet for exact dimensions

S - Standard on air bath or combo massage models

T - May require tile bead kit, see product page for details

American Standard

Baths and Whirlpools

Baths and Whirlpools

Bathing

	MODELS		INSTAL	LATION		OPT	TIONS		
	EverClean® Combo Massage	Alcove	Drop-In	Under Mount	ADA Compliant Height	Tile Flanges [™]	Whirlpool Heater	Page Number	Luxury Series 🖉
									5' x 30" Apron Front Acrylic Models
					\checkmark	Std		110	Studio®
		V				Std		115	Town Square S®
								5' >	x 30" Apron Front, Above Floor Rough
		V			\checkmark	Std		111	Studio
								5	5' x 30" Fold Over Edge Acrylic Models
		V			\checkmark	Std		112	Studio
									5' x 32" Apron Front Acrylic Models
	2425V.518C ^R 2425V.618C ^L	V				Std	Opt	97	Evolution®
		V			√	Std		110	Studio
		V			√	Std		115	Town Square S
			<u> </u>					5' x	x 32" Apron Front, Above Floor Rough
		V			√	Std		111	Studio
		<u> </u>			_			5	5' x 32" Fold Over Edge Acrylic Models
		√			√	Std		112	Studio
	ļ				_				5' x 32" Acrylic Models
	2422V.418C		√	√			Opt	98	Evolution •
			√	√				108	Studio •
									5' x 36" Acrylic Models
	2771V.418C		√	√			Opt	99	Evolution •
	3571.448WC.K2		√	V			Opt	103	Green Tea® 。
			√					108	Studio •
									5' x 42" Acrylic Models
	3574.448WC.K2		√	\checkmark			Opt ^s	106	Green Tea 🛛 🔍
	2748.448WC.K2		\checkmark	\checkmark			Opt ^s	113	Town Square® °

American Standard

Baths and Whirlpools

			[
Luxury Series 🖉	Nominal Dimensions ^D	Soaking Tub/ Bathing Pool	EverClean® Air Bath	EverClean® Whirlpool	EcoSilent® Whirlpool	
5-1/2' x 36" Acrylic Models						
Evolution®	66" x 36" x 19-3/4" (1676 x 914 x 502 mm)	2645V.002	_	_	_	
∘ Green Tea®	66" x 36" x 21" (1676 x 914 x 533 mm)	3572.002	_	_	3572.048WC	
∘ Studio®	66" x 36" x 22-1/2" (1676 x 914 x 572 mm)	2938.002-D0 2938.002-D2	_	_	-	
6' x 36" Acrylic Models					i	[
• Evolution	72" x 36" x 21-1/2" (1829 x 914 x 546 mm)	7236V.002	7236.068C	7236VC	_	
• Green Tea	72" x 36" x 21" (1829 x 914 x 533 mm)	3573.002	_	_	3573.048WC	
∘ Studio	72" x 36" x 22-1/2" (1829 x 914 x 572 mm)	2940.002-D0 2940.002-D2		_	_	
6' x 42" Acrylic Models		· · · · · · · · · · · · · · · · · · ·				
• Green Tea	72" x 42" x 21" (1829 x 1067 x 533 mm)	3575.002		_	3575.048WC	
° Town Square®	71-1/2" x 41-3/4" x 22" (1816 x 1060 x 559 mm)	2742.002	2742.068C	_	2742.048WC	
Corner Acrylic Models		· · · · · · · · · · · · · · · · · · ·				í
Evolution Corner	60" x 60" x 21-1/2" (1511 x 1511 x 546 mm)	_	_	6060VC	_	

NOTES:

R – Right side drain

L – Left side drain

D – Check product spec sheet for exact dimensions

S – Standard on air bath or combo massage models

T – May require tile bead kit, see product page for details

American Standard

Baths and Whirlpools

Bathing

			IONS	OPT		ATION	INSTAL		MODELS
${\mathscr D}$		Page Number	Whirlpool Heater	Tile Flanges ^T	ADA Compliant Height	Under Mount	Drop-In	Alcove	EverClean® Combo Massage
ylic Models	5-1/2' x 36" Acry								
\bigcirc	Evolution®	101					\checkmark		
0	Green Tea®	104	Opt ^s						3572.448WC.K2
0	Studio®	109							
ylic Models	6' x 36" Acry								
0	Evolution	100	Opt			\checkmark	\checkmark		7236V.418C
0	Green Tea	105	Opt ^s				\checkmark		3573.448WC.K2
0	Studio	109							
ylic Models	6' x 42" Acry								
0	Green Tea	107	Opt ^s			\checkmark	\checkmark		3575.448WC.K2
o	Town Square®	114	Opt						2742.448WC.K2
ylic Models	Corner Acr								
\sim	Evolution Corner	102	Std			\checkmark	\checkmark		

American Standard

Baths and Whirlpools

Master Series	Nominal Dimensions ^D	Soaking Tub/ Bathing Pool	Standard Whirlpool	EverClean® Whirlpool	
5' x 32" Apron Front Acrylic					
Cadet [®] with integral apron	60" x 32" x 20" (1524 x 813 x 508 mm)	2776.102 ^R 2776.202 ^L	2776.118W ^R 2776.218W ^L	2776.118WC ^R 2776.218WC ^L	
5' x 32" Acrylic Models					
∘ Cadet	60"x 31-3/4" x 19-3/4" (1524 x 806 x 502 mm)	2770.002	2770.018W	2770.018WC	
5' x 36" Acrylic Models					
○ Cadet	60"x 36" x 19-3/4" (1524 x 914 x 502 mm)	2771.002	2771.018W	2771.018WC	
5' x 42" Acrylic Models					
○ Cadet	60"x 42" x 19-3/4" (1524 x 1067 x 502 mm)	2772.002	2772.018W	2772.018WC	
Savona® Oval	60" x 42" x 21-1/4" (1524 x 1067 x 540 mm)	2903.002	_	2903.018WC	
6' x 36" Acrylic Models					
• Cadet	72"x 35-3/4" x 19-3/4" (1829 x 908 x 502 mm)	2773.002	2773.018W	2773.018WC	
6' x 42" Acrylic Models					
• Cadet	72"x 42" x 19-3/4" (1829 x 1067 x 502 mm)	2774.002	2774.018W	2774.018WC	
Corner Acrylic Models					
Cadet Corner	60"x 60" x 19-3/4" (1524 x 1524 x 502 mm)	2775.002	2775.018W	2775.018WC	

NOTES:

R - Right side drain

L – Left side drain

D – Check product spec sheet for exact dimensions

S – Standard on air bath or combo massage models

T – May require tile bead kit, see product page for details



Baths and Whirlpools

Bathing

	INSTALLATIO	N		OPTIONS			
Alcove	Drop-In	Under Mount	Apron Panel	Tile FlangesT	Whirlpool Heater	Page Number	Master Series
							5' x 32" Apron Front Acrylic
			Std	Std		123	Cadet [®]
							5' x 32" Acrylic Models
			Opt		Opt	122	Cadet 。
							5' x 36" Acrylic Models
	V		Opt	Opt	Opt	121	Cadet 。
							5' x 42" Acrylic Models
	\checkmark		Opt	Opt	Opt	120	Cadet 。
	√				Opt	124	Savona® Oval
							6' x 36" Acrylic Models
	V		Opt	Opt	Opt	119	Cadet 。
							6' x 42" Acrylic Models
			Opt	Opt	Opt	118	Cadet 。
							Corner Acrylic Models
	\checkmark			Opt	Opt	117	Cadet Corner

American Standard

Baths and Whirlpools

		MODELS			1
Nominal Dimensions [□]	Soaking Tub/ Bathing Pool	Standard Whirlpool	EverClean® Whirlpool	Integral Drain	
60" x 32" x 17-3/4" (1524 x 813 x 451 mm)	2461.002 ^R 2460.002 ^L		2461.028WC ^R 2460.028WC ^L		
66" x 32" x 20" (1676 x 813 x 508 mm)	★2470.002				
60" x 30" x 14" (1524 x 762 x 356 mm)	2391.202 ^R 2390.202 ^L	_		2391.202ICH 2390.202ICH	
60" x 30" x 17-1/2" (1524 x 762 x 445 mm)	2393.202 ^R 2392.202 ^L	_		2393.202ICH 2392.202ICH	
60" x 34" x 14" (1524 x 864 x 356 mm)	2395.202 ^R 2394.202 ^L	_		2395.202ICH 2394.202ICH	
60" x 34" x 17-1/2" (1524 x 864 x 445 mm)	2397.202 ^R 2396.202 ^L	-		2397.202ICH 2396.202ICH	
60" x 30" x 16-5/8" (1524 x 762 x 422 mm)	0263.112 [₽] 0263.212 [∟]	_			
60" x 30" x 14-1/4" (1524 x 762 x 362 mm)	0255.112 [₽] 0255.212 [∟]	_			
	Dimensions ^D $60" \times 32" \times 17-3/4"$ (1524 x 813 x 451 mm) $66" \times 32" \times 20"$ (1676 x 813 x 508 mm) $66" \times 30" \times 14"$ (1524 x 762 x 356 mm) $60" \times 30" \times 17-1/2"$ (1524 x 762 x 445 mm) $60" \times 34" \times 17-1/2"$ (1524 x 762 x 445 mm) $60" \times 34" \times 14"$ (1524 x 864 x 356 mm) $60" \times 34" \times 17-1/2"$ (1524 x 864 x 445 mm) $60" \times 30" \times 16-5/8"$ (1524 x 762 x 422 mm) $60" \times 30" \times 16-5/8"$ (1524 x 762 x 422 mm) $60" \times 30" \times 14-1/4"$	Dimensions ^D Bathing Pool $60^{\circ} \times 32^{\circ} \times 17-3/4^{\circ}$ (1524 x 813 x 451 mm)2461.002^{R} 2460.002^{L} $66^{\circ} \times 32^{\circ} \times 20^{\circ}$ (1676 x 813 x 508 mm) $\star 2470.002$ $66^{\circ} \times 30^{\circ} \times 14^{\circ}$ (1524 x 762 x 356 mm) $\star 2391.202^{R}$ 2390.202^{L} $60^{\circ} \times 30^{\circ} \times 17-1/2^{\circ}$ (1524 x 762 x 445 mm)2393.202^{R} 2392.202^{L} $60^{\circ} \times 34^{\circ} \times 17-1/2^{\circ}$ (1524 x 762 x 445 mm)2395.202^{R} 2394.202^{L} $60^{\circ} \times 34^{\circ} \times 17-1/2^{\circ}$ (1524 x 864 x 356 mm)2395.202^{R} 2396.202^{L} $60^{\circ} \times 34^{\circ} \times 17-1/2^{\circ}$ (1524 x 864 x 445 mm)2395.202^{R} 2396.202^{L} $60^{\circ} \times 30^{\circ} \times 16-5/8^{\circ}$ (1524 x 762 x 422 mm)0263.112^{R} 0263.212^{L} $60^{\circ} \times 30^{\circ} \times 14-1/4^{\circ}$ 0255.112^{R}	Nominal Dimensions ^p Soaking Tub/ Bathing Pool Standard Whirlpool $60^{\circ} x 32^{\circ} x 17-3/4^{\circ}$ (1524 x 813 x 451 mm) 2461.002 ⁸ 2460.002 ¹ $66^{\circ} x 32^{\circ} x 20^{\circ}$ (1676 x 813 x 508 mm) $\star 2470.002$ $66^{\circ} x 30^{\circ} x 14^{\circ}$ (1524 x 762 x 356 mm) $\star 2391.202^{8}$ 2390.202 ¹ — $60^{\circ} x 30^{\circ} x 17-1/2^{\circ}$ (1524 x 762 x 445 mm) 2393.202 ⁸ 2392.202 ¹ — $60^{\circ} x 30^{\circ} x 17-1/2^{\circ}$ (1524 x 762 x 445 mm) 2395.202 ⁸ 2392.202 ¹ — $60^{\circ} x 34^{\circ} x 17-1/2^{\circ}$ (1524 x 864 x 356 mm) 2395.202 ⁸ 2394.202 ¹ — $60^{\circ} x 34^{\circ} x 17-1/2^{\circ}$ (1524 x 864 x 445 mm) 2397.202 ⁸ 2396.202 ¹ — $60^{\circ} x 30^{\circ} x 16-5/8^{\circ}$ (1524 x 762 x 422 mm) 0263.112^{8} 0263.2121 — $60^{\circ} x 30^{\circ} x 14-1/4^{\circ}$ 0255.112^{8} —	Nominal Dimensions ^p Soaking Tub/ Bathing Pool Standard Whirlpool EverClean [®] Whirlpool $60^{\circ} x 32^{\circ} x 17-3/4^{\circ}$ (1524 x 813 x 451 mm) 2461.002 ⁸ 2460.002 ^k 2461.028WC ⁸ 2460.028WC ^k $60^{\circ} x 32^{\circ} x 20^{\circ}$ (1676 x 813 x 508 mm) $\star 2470.002$ $\star 2461.028WC^k$ $60^{\circ} x 30^{\circ} x 14^{\circ}$ (1524 x 762 x 356 mm) $\star 2391.202^{8}$ 2390.202 ^k $$ $60^{\circ} x 30^{\circ} x 17-1/2^{\circ}$ (1524 x 762 x 445 mm) 2395.202^{8} 2392.202 ^k $$ $60^{\circ} x 34^{\circ} x 17-1/2^{\circ}$ (1524 x 864 x 356 mm) 2395.202^{8} 2395.202 ^k $$ $60^{\circ} x 34^{\circ} x 17-1/2^{\circ}$ (1524 x 864 x 445 mm) 2397.202^{8} 2396.202 ^k $$ $60^{\circ} x 30^{\circ} x 16-5/8^{\circ}$ (1524 x 762 x 422 mm) 0263.112^{8} 0263.212^{k} $$ $60^{\circ} x 30^{\circ} x 14-1/4^{\circ}$ 0255.112^{8} $$ $$	Nominal Dimensions ^D Soaking Tub/ Bathing Pool Standard Whirlpool EverClean [®] Whirlpool Integral Drain Image: Soaking Tub/ Bathing Pool Standard Whirlpool EverClean [®] Whirlpool Integral Drain Image: Soaking Tub/ Bathing Pool Standard Whirlpool EverClean [®] Whirlpool Integral Drain Image: Soaking Tub/ (1524 x 813 x 51 mm) 2461.002 ^B 2460.002 ^E 2461.028WC ^B 2460.028WC ^C Image: Soaking Tub/ 2460.028WC ^C Image: Soaking Tub/ (1524 x 762 x 30 [°] x 14 [°] (1524 x 762 x 356 mm) \star 2470.002 Image: Soaking Tub/ 2390.202 ^E 2391.202 ^B Image: Soaking Tub/ 2390.202 ^E 2391.202 ^B Image: Soaking Tub/ 2392.202 ^E Image: Soaking Tub/ 2392.202 ^E 2391.202 ^C Image: Soaking Tub/ 2392.202 ^E 2393.202 ^B Image: Soaking Tub/ 2392.202 ^E 2393.202 ^C Image: Soaking Tub/ 2393.202 ^C 2393.202 ^E Image: Soaking Tub/ 2393.202 ^E 2395.202 ^C Image: Soaking Tub/ 2394.202 ^E 2395.202 ^C Image: Soaking Tub/ 2396.202 ^E 2395.202 ^C Image: Soaking Tub/ 2396.202 ^E 2395.202 ^C Image: Soaking Tub/ 2396.202 ^E 2397.202 ^E Image: Soaking Tub/ 2396.202 ^E

NOTES:

R - Right side drain

L – Left side drain

D – Check product spec sheet for exact dimensions

S – Standard on air bath or combo massage models

T - May require tile bead kit, see product page for details



Baths and Whirlpools

Bathing

			s	OPTION			ON	STALLATI	INS	
Americast [®] Enameled Steel	Page Number	Whirlpool Heater	Above Floor Rough (AFR)	Tile Flanges [™]	Apron Panel	ADA Compliant Height	Under Mount	Drop-In	Alcove	
Luxury Americast Models										
Cambridge [®]	126	Opt		Std	Std				V	
Stratford® Drop-in	127			Opt						
Americast Models										
Princeton®	128			Std	Std				V	
Princeton AFR with integral apron	129		Std	Std	Std				V	
Princeton with luxury ledge	130			Std	Std				V	
Princeton AFR with luxury ledge	131		Std	Std	Std				V	
Enameled Steel Models										
New Solar® AFR with integral apron	132		Std	Std	Std				V	
New Salem [®] with integral apron	132			Std	Std				V	

American Standard

Baths and Whirlpools

Popular Bath Accessories	DESCRIPTION	COLOR	LIST PRIC
Bath Drains:			
Deep Soak® 1640.305 Bathtub Drain	 Unique overflow allows 2" (51 mm) deeper water level than standard bath drain Universal design works with most standard bathtubs Tap-actuated pop-up drain stopper ABS construction 	002 Polished Chrome 011 Arctic 020 White 222 Linen 295 Brushed Nickel	138 185 154 185 248
Deep Soak 1599.205 Max Drain	 Unique top-mount overflow allows 3" (76 mm) deeper water level Works with Evolution[®] model only Tap-actuated pop-up drain stopper Brass construction 	002 Polished Chrome 011 Arctic 020 White 222 Linen 295 Brushed Nickel	154 185 154 185 248
Universal Bathtub Drain 1583.470	 Universal design works with all American Standard Master and Luxury Series baths and whirlpools Rotary knob controls pop-up drain stopper Brass construction 	002 Polished Chrome 011 Arctic 020 White 295 Brushed Nickel	157 267 267 267
FST Overflow Cover 1680.100 and Drain Kit	 Standard overflow cover and drain Only for freestanding bathtub models 2765.034, 2766.034 and 2767.034 	013 Polished Nickel 243 Matte Black 278 Legacy Bronze 295 Brushed Nickel	111 202 118 113
Town Square® S FST Overflow Cover and Drain Kit	 Overflow cover with tap activated pop-up drain Only for freestanding bathtub model 2546.004 	002 Polished Chrome 013 Polished Nickel 278 Legacy Bronze 295 Brushed Nickel	146 205 220 205
Townsend® FST Overflow Cover and Drain Kit	 Standard overflow cover and drain Only for freestanding bathtub model 2691.004 	002 Polished Chrome 013 Polished Nickel 243 Matte Black 278 Legacy Bronze 295 Brushed Nickel	113 159 202 159 170
Heater:	I	11	
9075.120	 Safe -T Heater (whirlpool only)* Quick connect installation Helps maintain a consistent water temperature 		311
Tile Bead:			
751755-100	Universal tile bead kit – includes 15' (4.6 m) roll of tile be a 15' (4.6 m) roll of adhesive	ead and	64

ACCESSORIES AND/OR COMPONENTS LISTED ON THIS PAGE ARE NOT LUXURY ITEMS AND DO NOT QUALIFY FOR THE LUXURY MULTIPLIER. *Electric heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

Universal tile bead adhesive (bulk) - 30' (9.1 m) roll of adhesive ONLY

9330.014

American Standard

44

Luxury Series: Whirlpools, Air Baths and Bathtubs

Luxury Series whirlpools, air baths and combo massage systems from American Standard[®] offer massage therapy options to satisfy any need, whether it's renewing aching muscles or soothing away the tensions of a hectic day. Available in a range of styles, sizes and shapes, it's easy to find the perfect model to complement any bathroom design.



Whirlpools, Air Baths and Bathtubs

EverClean[®] Whirlpool System

Fully adjustable, high-efficiency jets produce a strong stream, leaving the bather feeling refreshed and energized. Select models also feature jets in the lumbar region to provide a soothing shiatsu massage.

Features

- EverClean System
- Single-speed pump
- Air switch On/Off control
- Clean Jets[™]
- Silent air volume controls

EverClean Air Bath System

Thousands of warm air bubbles produced from air jets that sit perfectly flush with the inside perimeter of the tub create a calm and gentle or brisk and invigorating experience.

Features

- EverClean System
- Perfectly smooth jets around tub perimeter
- Variable speed air blower
- Programmable automatic purge with timer
- Electronic controls

EcoSilent[®] Whirlpool System

EcoSilent Whirlpools offer all the features of the EverClean Whirlpools, plus the EcoSilent whirlpool pump which produces 50% less noise and uses 45% less energy.

Features

- EverClean System
- EcoSilent whirlpool pump
- Clean Jets
- Electronic On/Off control
- Silent air volume controls

EcoSilent Combo Massage System

This system combines the EcoSilent Whirlpool System, the EverClean Air Bath System with Chromatherapy LED lighting and a factory-installed in-line whirlpool heater.

Features

- EverClean System and EcoSilent whirlpool system
- Clean Jets
- Silent air volume controls
- Variable speed air blower
- Programmable automatic purge with timer
- · Factory installed in-line whirlpool heater

American Standard




EverClean® System

Whirlpools and Air Baths with the EverClean System incorporate a **silver-ion antimicrobial additive** into the circulation piping to protect the pipes from mold, mildew, algae and fungus that could cause deterioration or staining of the pipes.

The EverClean System, exclusively from American Standard, is the easiest way to help keep your whirlpool and air bath circulation system clean.

- The silver-ion additive is molded directly into the circulation piping
- The silver-ion additive protects the pipes from algae, fungus, mold and mildew
- The silver-ion additive works around the clock no matter how often you use your whirlpool or air bath

The silver-ion additive is molded right into the circulating piping.



• Competitive cleaning systems using ozone that operate only while the motor is running will not help when water gets into the jets or piping during bathing or showering

All EcoSilent[®] whirlpools and combo massage models come standard with the EverClean System.

American Standard

Baths and Whirlpools

Bathing



The revolutionary **SILENT** whirlpool you can truly relax in.



• Ultra-quiet EcoSilent whirlpools create 50% less noise. The hushed environment and warm massage activate the body's relaxation response so elevated levels of stress hormones can return to normal after a stressful day

TYPICAL SOUND LEVEL (dB A		PERCE	IVED SOU	IND LEVEL
RAINFALL 50)			
ecosilent 55 Whirlpool	Ba	aseline		
DISHWASHER 60)			
TYPICAL SMALL WHIRLPOOL	5		2x Louder	


- Ultra-efficient EcoSilent whirlpools use 45% less energy. The EcoSilent pump and whirlpool heater coordinate seamlessly to provide powerful heated hydrotherapy while eliminating wasted energy
- EverClean[®] helps the circulation system stay cleaner. A silver-ion antimicrobial additive molded directly into the water circulation piping inhibits the growth of mold and mildew on the pipes
- EverClean System is standard on all luxury American Standard whirlpools, air baths and combo massage models






Whirlpools and Air Baths

American Standard whirlpools can be customized to fit your preferences. Choose a whirlpool with flat-mounted Clean Jets[™] or the relaxing, soothing bubbles of an Air Bath. Two great ways to indulge.

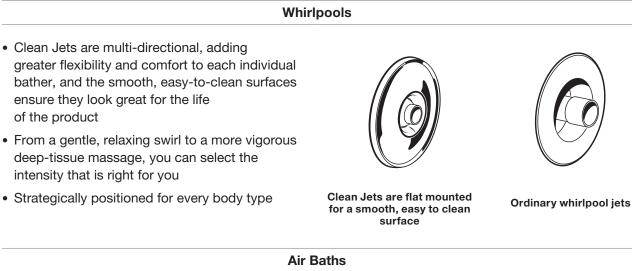


- · Designed to excite the skin and soothe the mind, Evolution® Air Baths will envelop you in a cascade of warm, comforting bubbles
- · Full body massage from air jets placed strategically around the bath wall
- · Variable speeds to adjust the experience from gentle to invigorating and anywhere in between



Deep Soak® Max Bath Drain

- Deep Soak tubs are specially designed to work with our Deep Soak max bath drain
- Provides 3" (76 mm) of additional water depth for a more luxurious soaking experience
- · Low step-over height so it is easy to get in and out





Baths and Whirlpools

Luxury Series

Acrylic Whirlpools	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE	
Evolution® Deep Soak® With Integral Apron 5' x 32"	 Acrylic with fiberglass reinforcement Integral apron with removable access panel Integral 3-sided tile/water retention flange Dual molded-in armrests Must order Deep Soak Max Drain Nominal Dimensions: 60" x 32" x 21-1/2" (1524 x 813 x 546 mm) 					
© 2425VC-RHO	 EverClean[®] Whirlpool – right-hand outlet Hydro Massage System EverClean System Single speed pump/motor Side-mounted air switch on/off Eight multi-directional and flow-adjustable Clean Jets[™] including two in the lumbar area Two silent air volume controls Quick connect Safe -T Heater connection system (must order Safe -T Heater separately) 	96 lbs (44 kg)	21.60	020 White	1,659	
2425VC-LH0	EverClean Whirlpool – left-hand outlet	96 lbs (44 kg)	21.60	020 White	1,659	
2425.168C	 EverClean Air Bath – right-hand outlet EverClean System Air jets fully surrounding the bathing well Variable speed air blower with heater Automatic purge with timer Chrome air jets 	96 lbs (44 kg)	21.60	020 White	2,557	
2425.2680	EverClean Air Bath – left-hand outlet	96 lbs (44 kg)	21.60	020 White	2,557	
2425V.518C	EverClean Combo Massage System right-hand outlet • EverClean Whirlpool System • EverClean Air Bath System • Quick connect Safe -T Heater connection system (must order Safe -T Heater separately)	96 lbs (44 kg)	21.60	020 White	3,903	
2425V.618C	EverClean Combo Massage System left-hand outlet	96 lbs (44 kg)	21.60	020 White	3,903	
2425V-RH0.002	Bathing Pool – right-hand outlet	75 lbs (34 kg)	21.60	020 White 011 Arctic 222 Linen	948 948 997	
2425V-LH0.002	Bathing Pool – left-hand outlet	75 lbs (34 kg)	21.60	020 White 011 Arctic 222 Linen	948 948 997	
	Required Component (specify finish):		·			
1599.205	Deep Soak Max Drain* is required to operate this mo	odel.		See page	e 92.	
	Separate Components and Shower Doors (specify	finish):				
9075.120	Safe -T Heater (whirlpool only) [†]		See page	e 92.		
AM00758 AM00750	Prestige Framed Sliding Tub Door	restige Framed Sliding Tub Door				
AM00350	Euro Semi-Frameless Sliding Tub Door			See pag	e 137.	

*Deep Soak® Max Drain provides an additional 3" (76 mm) of water depth for a more luxurious bath. † Electric heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

American Standard

Baths and Whirlpools



Acrylic Whirlp	ools	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Evolution® Deep Soak® 5' x 32"		 Acrylic with fiberglass reinforcement Dual molded-in armrests Pre-leveled tub bottom Under mount option Must order Deep Soak Max Drain Nominal Dimensions: 60" x 32" x 21-1/2" (1524 x 813 x 546 mm) 				
	2422VC	EverClean [®] Whirlpool • EverClean System • Single speed pump/motor • Side-mounted air switch on/off • Eight multi-directional and flow-adjustable Clean Jets [™] including two in the lumbar area • Two silent air volume controls • Quick connect Safe -T Heater connection system (must order Safe -T Heater separately)	77 lbs (35 kg) n	20.40	020 White	1,663
	2422.068C	EverClean Air Bath EverClean System Air jets fully surrounding the bathing well Variable speed air blower with heater Automatic purge with timer Chrome air jets 	77 lbs (35 kg)	20.40	020 White	2,478
	2422V.418C	 EverClean Combo Massage System EverClean Whirlpool System EverClean Air Bath System Quick connect Safe -T Heater connection system (must order Safe -T Heater separately) 	77 lbs (35 kg)	20.40	020 White	3,628
	2422V.002	Bathing Pool	73 lbs (33 kg)	20.40	020 White 011 Arctic 222 Linen	929 929 977
SR MAP	9261.019	5' (152.4 cm) Apron	6 lbs (2.7 kg)	0.84	020 White	264
		Required Component (specify finish):				
	1599.205	Deep Soak Max Drain* is required to operate this	<u>s model</u> .		See page	92.
		Separate Components and Shower Doors (spe				
	9075.120	Safe -T Heater (whirlpool only) ⁺				
	751755-100	Universal tile bead kit – includes 15' (4.6 m) roll of til a 15' (4.6 m) roll of adhesive		See page 92.		
	9330.014	Universal tile bead adhesive (bulk) - 30' (9.1 m) roll				
	AM00758 AM00750	Prestige Framed Sliding Tub Door	See page 140.			
				See page 137.		

* Deep Soak® Max Drain provides an additional 3" (76 mm) of water depth for a more luxurious bath.

* Electric heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

American Standard

Baths and Whirlpools

Luxury Series

Acrylic Whirlpools	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE	
Evolution [®] Deep Soak [®] 5' x 36"	 Acrylic with fiberglass reinforcement Dual molded-in armrests Pre-leveled tub bottom Under mount option Must order Deep Soak Max Drain 		*	A		
••••	Nominal Dimensions: • 60" x 36" x 21-1/2" (1524 x 914 x 546 mm)					
277110	 EverClean[®] Whirlpool EverClean System Single speed pump/motor Side-mounted air switch on/off Eight multi-directional and flow-adjustable Clean Jets[™] including two in the lumbar area Two silent air volume controls Quick connect Safe -T Heater connection system (must order Safe -T Heater separately) 	111 lbs (50 kg)	24.40	020 White	1,738	
2771.0680	 EverClean Air Bath EverClean System Air jets fully surrounding the bathing well Variable speed air blower with heater Automatic purge with timer 	111 lbs (50 kg)	24.40	020 White	2,567	
2771V.4180	 EverClean Combo Massage System EverClean Whirlpool System EverClean Air Bath System Quick connect Safe -T Heater connection system (must order Safe -T Heater separately) 	111 lbs (50 kg)	24.40	020 White	3,856	
2771V.002	Bathing Pool	76 lbs (34 kg)	24.40	020 White 011 Arctic 222 Linen	969 969 1,017	
9261.019	5' (152.4 cm) Apron	6 lbs (2.7 kg)	0.84	020 White	264	
	Required Component (specify finish):					
1599.205	Deep Soak Max Drain* is required to operate this mo	del.		See page	92.	
	Separate Components and Shower Doors (specify	finish):				
9075.120	Safe -T Heater (whirlpool only) [†]					
751755-100	a 15' (4.6 m) roll of adhesive		See pag	e 92.		
9330.014	Universal tile bead adhesive (bulk) – 30' (9.1 m) roll of a	_Y				
AM00758 AM00750	Prestige Framed Sliding Lub Door	Prestige Framed Sliding Tub Door				
AM00350	Euro Semi-Frameless Sliding Tub Door			See page 137.		
				I		

* Deep Soak® Max Drain provides an additional 3" (76 mm) of water depth for a more luxurious bath.

[†] Electric heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

American Standard

Acrylic Whirlpools

Baths and Whirlpools



MAP

ols	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE	
	 Acrylic with fiberglass reinforcement Two molded-in armrests Pre-leveled tub bottom Under mount option Must order Deep Soak Max Drain 				A Carl	
	Nominal Dimensions: • 72" x 36" x 21-1/2" (1829 x 914 x 546 mm)					
7236VC	 EverClean[®] Whirlpool EverClean System Single speed pump/motor Side-mounted air switch on/off Eight multi-directional and flow-adjustable Clean Jets[™] including two in the lumbar area Three silent air volume controls Quick connect Safe -T Heater connection system (must order Safe -T Heater separately) 	135 lbs (61 kg)	24.40	020 White	2,071	
7236.068C	 EverClean Air Bath EverClean System Air jets fully surrounding the bathing well Variable speed air blower with heater Automatic purge with timer 	90 lbs (41 kg)	24.40	020 White	2,808	
7236V.418C	 EverClean Combo Massage System EverClean Whirlpool System EverClean Air Bath System Quick connect Safe -T Heater connection system (must order Safe -T Heater separately) 	135 lbs (61 kg)	24.40	020 White	4,340	
7236V.002	Bathing Pool	58 lbs (26 kg)	24.40	020 White 011 Arctic 222 Linen	1,100 1,100 1,153	
9271.019	6' (182.9 cm) Apron	6 lbs (2.7 kg)	0.95	020 White	299	
	Required Component (specify finish):		I			
1599.205	Deep Soak Max Drain* is required to operate this mod		See page	92.		
	Separate Components:		· · · · ·			
9075.120	Safe -T Heater (whirlpool only) [†]					
751755-100	Universal tile bead kit – includes 15' (4.6 m) roll of tile bea a 15' (4.6 m) roll of adhesive	id and		See page 92.		
9330.014	Universal tile bead adhesive (bulk) – 30' (9.1 m) roll of ad	hesive ONL	Y			

* Deep Soak® Max Drain provides an additional 3" (76 mm) of water depth for a more luxurious bath.

* Electric heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

American Standard

Baths and Whirlpools

Acrylic Whirlpools	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price	
Evolution [®] Oval 5-1/2' x 36"	 Acrylic with fiberglass reinforcement Pre-leveled tab bottom Under mount installation option 	T	al a			
	Nominal Dimensions: • 66" x 36" x 19-3/4" (1676 x 914 x 502 mm)					
2645V.002	Bathing Pool	77 lbs (35 kg)	24.40	020 White 011 Arctic 222 Linen	1,085 1,085 1,116	
	Required Components (specify finish):				1	
1640.305	Deep Soak® bathtub drain (bathing pool only)*			See page 92.		
	Separate Components:					
751755-100	a 15' (4.6 m) roll of adhesive			See page 92.		
9330.014						

* Deep Soak® bathtub drain provides an additional 2" (51 mm) of water depth for a more luxurious bath.

Luxury Series



Baths and Whirlpools

Acrylic Whirlpools	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price		
Evolution® Corner	 Acrylic with fiberglass reinforcement Molded-in seat Tub-for-two with center drain and dual backrests Wave style color-matched grab bar Pre-leveled tub bottom Wall Dimensions: 	- 7	F				
	• 54-1/2" x 54-1/2" x 21-1/2" (1384 x 1384 x 546 mm)	9 8	•				
	Installed Size: • 76-3/4" x 65-3/8" x 21-1/2" (1949 x 1661 x 546 mm)						
					and the second second		
6060VC	EverClean [®] Whirlpool • EverClean System • Single speed pump/motor • Side-mounted air on/off switch • Eight multi-directional and flow-adjustable Clean Jets [™] including two in the lumbar area • Three silent air volume controls • Factory installed whirlpool heater included* • Under mount installation option	132 lbs (60 kg)	40.70	020 White	2,604		
	Bathing Pool not available						
	Required Component (specify finish):						
1583.470	Universal drain	See page 92.					
	Separate Components:						
751755-100	Universal tile bead kit – includes 15' (4.6 m) roll of tile bead a 15' (4.6 m) roll of adhesive	See page 92.					
9330.014	Universal tile bead adhesive (bulk) - 30' (9.1 m) roll of ad						

* Electric heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

American Standard

Baths and Whirlpools

Bathing

Acrylic Whirlpools	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE	
Green Tea® 5' x 36"	 Acrylic with fiberglass reinforcement Form-fitted neck support Molded-in armrests with elbow supports Dual accessory deck area Pre-leveled tub bottom Drop-in or under mount installation Nominal Dimensions: 60" x 36" x 21" (1524 x 914 x 533 mm) 					
	 EcoSilent[®] Whirlpool EverClean[®] System Single speed pump with air switch on/off Eight flow-adjustable Clean Jets[™] Two silent air volume controls Quick connect Safe -T Heater connection system (must order Safe -T Heater separately) Ultra-quiet, makes 50% less noise Ultra-efficient, uses 45% less energy Electronic on/off control 	103 lbs (47 kg)	24.40	020 White	3,629	
3571.448WC.K2	 EcoSilent Combo Massage System EcoSilent Whirlpool System EverClean Air Bath System Factory installed in-line whirlpool heater* Chromatherapy LED lighting system 	103 lbs (47 kg)	24.40	020 White	6,199	
3571.002	Bathing Pool	70 lbs (32 kg)	24.40	020 White	1,260	
	Required Components (specify finish):					
1583.470	Universal drain (whirlpool only)					
1640.305	Deep Soak® bathtub drain (bathing pool only)†			See page 92.		
	Separate Components (specify finish):					
9075.120						
751755-100				See page 92.		
9330.014				-		
AM00758 AM00750	Prestige Framed Sliding Lub Door			See page 140.		
AM00350	Euro Semi-Frameless Sliding Tub Door			See page 137.		

* Electric heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

⁺ Deep Soak[®] bathtub drain provides an additional 2" (51 mm) of water depth for a more luxurious bath.

Luxury Series

American Standard



Acrylic Whirlpools		DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE	
Green Tea® 5-1/2' x 36"		 Acrylic with fiberglass reinforcement Form-fitted neck support Molded-in armrests with elbow supports Dual accessory deck area Pre-leveled tub bottom Drop-in or under mount installation Nominal Dimensions: 66" x 36" x 21" (1676 x 914 x 533 mm) 					
38	572.048WC	 EcoSilent[®] Whirlpool EverClean[®] System Single speed pump with air switch on/off Eight multi-directional and flow-adjustable Clean Jets[™] including two in the lumbar area Two silent air volume controls Quick connect Safe -T Heater connection system (must order Safe -T Heater separately) Ultra-quiet, makes 50% less noise Ultra-efficient, uses 45% less energy Electronic on/off control 	100 lbs (45 kg)	24.40	020 White	3,764	
3572	.448WC.K2	 EcoSilent Combo Massage System EcoSilent Whirlpool System EverClean Air Bath System Factory installed in-line whirlpool heater* Chromatherapy LED lighting system 	100 lbs (45 kg)	24.40	020 White	6,550	
3572.002	Bathing Pool	81 lbs (37 kg)	24.40	020 White	1,322		
		Required Components (specify finish):					
	1583.470 Universal drain (whirlpool only)						
1640.305		Deep Soak® bathtub drain (bathing pool only)†			See page 92.		
		Separate Components:					
	9075.120	Safe -T Heater (whirlpool only)*					
7	751755-100 Universal tile bead kit – includes 15' (4.6 m) roll of tile bead and a 15' (4.6 m) roll of adhesive				See page 92.		
	9330.014	Universal tile bead adhesive (bulk) - 30' (9.1 m) roll of a	dhesive ONI	_Y			

* Electric heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

⁺ Deep Soak[®] bathtub drain provides an additional 2" (51 mm) of water depth for a more luxurious bath.

American Standard

Baths and Whirlpools

Luxury Series

Acrylic Whirlpools	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE	
Green Tea® 6' x 36"	 Acrylic with fiberglass reinforcement Form-fitted neck support Molded-in armrests with elbow supports Dual accessory deck area Pre-leveled tub bottom Drop-in or under mount installation 					
	Nominal Dimensions: • 72" x 36" x 21" (1829 x 914 x 533 mm)					
3573.048WC	 EcoSilent[®] Whirlpool EverClean[®] System Single speed pump with air switch on/off Eight multi-directional and flow-adjustable Clean Jets[™] including two in the lumbar area Two silent air volume controls Quick connect Safe -T Heater connection system (must order Safe -T Heater separately) Ultra-quiet, makes 50% less noise Ultra-efficient, uses 45% less energy Electronic on/off control 	113 lbs (51 kg)	24.40	020 White	3,764	
3573.448WC.K2	EcoSilent Combo Massage System EcoSilent Whirlpool System EverClean Air Bath System Factory installed in-line whirlpool heater* Chromatherapy LED lighting system 	113 lbs (51 kg)	24.40	020 White	6,664	
3573.002	Bathing Pool	80 lbs (36 kg)	24.40	020 White	1,347	
	Required Components (specify finish):					
1583.470	Universal drain (whirlpool only)					
1640.305	Deep Soak® bathtub drain (bathing pool only)†			See page 92.		
	Separate Components:					
9075.120	9075.120 Safe -T Heater (whirlpool only)*					
751755-100	751755-100 Universal tile bead kit – includes 15' (4.6 m) roll of tile bead and a 15' (4.6 m) roll of adhesive			See page 92.		
9330.014	Universal tile bead adhesive (bulk) - 30' (9.1 m) roll of a					

* Electric heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

⁺ Deep Soak[®] bathtub drain provides an additional 2" (51 mm) of water depth for a more luxurious bath.

American Standard

Acrylic Whirlpools	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE	
Green Tea® 5' x 42"	 Acrylic with fiberglass reinforcement Form-fitted neck support Molded-in armrests with elbow supports Dual accessory deck area Pre-leveled tub bottom Drop-in or under mount installation Nominal Dimensions: 60" x 42" x 21" (1524 x 1067 x 533 mm) 					
3574.048WC	 EcoSilent[®] Whirlpool EverClean[®] System Single speed pump with air switch on/off Eight multi-directional and flow-adjustable Clean Jets[™] including two in the lumbar area Two silent air volume controls Quick connect Safe -T Heater connection system (must order Safe -T Heater separately) Ultra-quiet, makes 50% less noise Ultra-efficient, uses 45% less energy Electronic on/off control 	103 lbs (47 kg)	28.20	020 White	3,786	
3574.448WC.K2	 EcoSilent Combo Massage System EcoSilent Whirlpool System EverClean Air Bath System Factory installed in-line whirlpool heater* Chromatherapy LED lighting system 	103 lbs (47 kg)	28.20	020 White	6,393	
3574.002	Bathing Pool	76 lbs (34 kg)	28.20	020 White	1,387	
	Required Components (specify finish):			·		
1583.470	Universal drain (whirlpool only)					
1640.305	Deep Soak [®] bathtub drain (bathing pool only) [†]	See page 92.				
	Separate Components and Shower Doors (specify finish):					
9075.120	Safe -T Heater (whirlpool only)*					
751755-100	Universal tile bead kit – includes 15' (4.6 m) roll of tile bead and a 15' (4.6 m) roll of adhesive			See page 92.		
9330.014	Universal tile bead adhesive (bulk) – 30' (9.1 m) roll of ac					
AM00758 AM00750	Prestige Framed Sliding Lub Door			See page	e 140.	
AM00350	Euro Semi-Frameless Sliding Tub Door			See page	9 137.	

* Electric heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

 † Deep Soak $^{\odot}$ bathtub drain provides an additional 2" (51 mm) of water depth for a more luxurious bath.

American Standard

Baths and Whirlpools

Acrylic Whirlpools	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Green Tea® 6' x 42"	 Acrylic with fiberglass reinforcement Form-fitted neck support Molded-in armrests with elbow supports Dual accessory deck area Pre-leveled tub bottom Drop-in or under mount installation Nominal Dimensions: 72" x 42" x 21" (1829 x 1067 x 533 mm) 				
3575.048WC	 EcoSilent[®] Whirlpool EverClean[®] System Single speed pump with air switch on/off Eight multi-directional and flow-adjustable Clean Jets[™] including two in the lumbar area Two silent air volume controls Quick connect Safe -T Heater connection system (must order Safe -T Heater separately) Ultra-quiet, makes 50% less noise Ultra-efficient, uses 45% less energy Electronic on/off control 	131 lbs (59 kg)	28.20	020 White	3,895
3575.448WC.K2	EcoSilent Combo Massage System • EcoSilent Whirlpool System • EverClean Air Bath System • Factory installed in-line whirlpool heater* • Chromatherapy LED lighting system	131 lbs (59 kg)	28.20	020 White	6,797
3575.002	Bathing Pool	83 lbs (38 kg)	28.20	020 White	1,493
	Required Components (specify finish):				
1583.470	Universal drain (whirlpool only)				
1640.305	Deep Soak® bathtub drain (bathing pool only) †			See page	92.
	Separate Components:				
9075.120	Safe -T Heater (whirlpool only)*				
751755-100	Universal tile bead kit – includes 15' (4.6 m) roll of tile be a 15' (4.6 m) roll of adhesive	ad and		See page	92.
9330.014	Universal tile bead adhesive (bulk) – 30' (9.1 m) roll of a	dhesive ONI	Y		

* Electric heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

[†] Deep Soak[®] bathtub drain provides an additional 2" (51 mm) of water depth for a more luxurious bath.

Luxury Series

2" Edge Profile

Zero-Edge Profile

Studio[®] Drop-in Bathing Pools

Product Description

- · High-gloss acrylic with fiberglass reinforcement
- · Minimalist design with contoured lumbar support
- · Spacious bathing well
- Soaking depth of 17-3/4" (451 mm) for a deep relaxing soak
- Pre-leveled tub bottom
- Drop-in or under mount installation
- Can also be flush-mounted with optional Zero-Edge profile **Available in 2 different deck profiles:**

2" Edge Profile

Standard deck height for a contemporary appearance

Zero-Edge Profile

• Low-profile, 1/2" (13 mm) deck height can be mounted flush with surrounding tile

NET LIST PTS COLORS **Acrylic Drop-in Bathing Pools** DESCRIPTION WEIGHT PRICE Nominal Dimensions: Studio Drop-In **Bathing Pools** • 60" x 32" x 22-1/2" (1524 x 813 x 572 mm) 5' x 32" 2932.002-D2 103 lbs 20.37 **Bathing Pool** 020 White 1,352 • 2" (51 mm) profile (47 kg) 2932.002-D0 **Bathing Pool** 103 lbs 19.30 020 White 1,352 Zero-Edge profile (47 kg) MAP SR Studio Nominal Dimensions: 5' x 36" • 60" x 36" x 22-1/2" (1524 x 914 x 572 mm) 2934.002-D2 **Bathing Pool** 121 lbs 20.37 1,425 020 White • 2" (51 mm) profile (55 kg) 2934.002-D0 **Bathing Pool** 121 lbs 19.30 020 White 1,425 • Zero-Edge profile (55 kg) 10P Required Components for ALL above (specify finish): 1640.305 Deep Soak® bathtub drain (bathing pool only)* See page 92. 1583.470 Universal drain

*Deep Soak® bathtub drain provides an additional 2" (51 mm) of water depth for a more luxurious bath.

Continued on next page.

108 List Price Guide 2020

American Standard

Baths and Whirlpools

Acrylic Drop-in Bathing Pools		DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Studio [®] 5-1/2' x 36"		Nominal Dimensions: • 66" x 36" x 22-1/2" (1676 x 914 x 5	72 mm)			1
	2938.002-D2	Bathing Pool • 2" (51 mm) profile	131 lbs (59 kg)	24.44	020 White	1,491
	2938.002-D0	Bathing Pool • Zero-Edge profile	131 lbs (59 kg)	21.60	020 White	1,491
Studio 5' x 36"		Nominal Dimensions: • 72" x 36" x 22-1/2" (1829 x 914 x 5	72 mm)			1
	2940.002-D2	Bathing Pool	141 lbs	22.92	020 White	1,593
		• 2" (51 mm) profile	(64 kg)			.,
	2940.002-D0	2" (51 mm) profile Bathing Pool Zero-Edge profile	(64 kg) 141 lbs (64 kg)	22.92	020 White	1,593
		Bathing Pool	141 lbs (64 kg)	22.92	020 White	
		Bathing Pool • Zero-Edge profile	141 lbs (64 kg)	22.92	020 White	1,593

*Deep Soak® bathtub drain provides an additional 2" (51 mm) of water depth for a more luxurious bath.

Luxury Series



Baths and Whirlpools

Acrylic Bathing F with Apron	ools	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Studio [®] Bathing Pool With A	pron	 High-gloss acrylic with fiberglass reinforcement Spacious bathing well Integral lumbar support Textured tub floor Integral apron in a clean, minimalist design Integral three-sided, 1" (25 mm) tiling/water retention flange helps prevent water seepage Design coordinates with Studio Bath Wall Set (sold separately) For recess installation Pre-leveled tub bottom for easier installation ADA compliant height Limited lifetime warranty 	À			
	2946.102	Bathing Pool with right drain – RHO Nominal Dimensions: • 60" x 32" x 18" (1524 x 813 x 457 mm)	60 lbs (27 kg)	10.18	011 Arctic 020 White	844 844
	2946.202	Bathing Pool with left drain – LHO Nominal Dimensions: • 60" x 32" x 18" (1524 x 813 x 457 mm)	60 lbs (27 kg)	10.18	011 Arctic 020 White	844 844
	2973.102	Bathing Pool with right drain – RHO Nominal Dimensions: • 60" x 30" x 18" (1524 x 762 x 457 mm)	56 lbs (25 kg)	9.82	011 Arctic 020 White	839 839
	2973.202	Bathing Pool with left drain – LHO Nominal Dimensions: • 60" x 30" x 18" (1524 x 762 x 457 mm)	56 lbs (25 kg)	9.82	011 Arctic 020 White	839 839
		Required Components (specify finish):				
	1583.470	Universal drain			0	
	1640.305	Deep Soak [®] bathtub drain			See page	92.
		Separate Components (specify finish):				
	AM00750 AM00758	Prestige Framed Sliding Tub Door			See page	140.
	AM00350	Euro Semi-Frameless Sliding Tub Door			See page	137.
Studio Bath Wall Set 60" x 32"		 High-impact polystyrene Center wall area free of shelving to provide easier movement Mounts directly to studs – no backer board needed 3/4" (19 mm) integral tile flange Tongue and groove inter-locking for alignment and to prevent water seepage Six integrated extra deep 4-1/2" (114 mm) shelves Includes two side walls and one back wall For use with 011 Arctic White 60" x 32" (1524 x 813 mm) bathtub models Nominal Dimensions: Side Panel 58" tall x 32" wide (1473 x 813 mm) Back Panel 58" tall x 60" wide (1473 x 1524 mm) 				
	2946.BW	Bath Wall Set	111 lbs (50 kg)		011 Arctic	876

Luxury Series

American Standard

Baths and Whirlpools

Bathing

Acrylic Bathing Powith Apron	ools	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Studio® Above Floor Rough		 Above floor rough installation Ideal for renovation or new construction saving time and labor costs as plumbing does not need to be moved if the drain end is changing High-gloss acrylic with fiberglass reinforcement Spacious bathing well Integral lumbar support Textured tub floor Integral apron in a clean, minimalist design Integral three-sided, 1" (25 mm) tiling/water retention flange helps prevent water seepage For recess installation Pre-leveled tub bottom for easier installation ADA compliant height Limited lifetime warranty 				
	2574.102	Bathing Pool with right drain – RHO Nominal Dimensions: • 60" x 32" x 18" (1524 x 813 x 457 mm)	60 lbs (27 kg)	14.10	011 Arctic 020 White	1,096 1,096
	2574.202	Bathing Pool with left drain – LHO Nominal Dimensions: • 60" x 32" x 18" (1524 x 813 x 457 mm)	60 lbs (27 kg)	14.10	011 Arctic 020 White	1,096 1,096
	2573.102	Bathing Pool with right drain – RHO Nominal Dimensions: • 60" x 30" x 18" (1524 x 762 x 457 mm)	56 lbs (25 kg)	14.10	011 Arctic 020 White	1,025 1,025
	2573.202	Bathing Pool with left drain – LHO Nominal Dimensions: • 60" x 30" x 18" (1524 x 762 x 457 mm)	56 lbs (25 kg)	14.10	011 Arctic 020 White	1,025 1,025
		Required Components (specify finish):				
	1583.470	Universal drain			2	
	1640.305	Deep Soak® bathtub drain			See page	92.
		Separate Components (specify finish):				
	AM00750 AM00758	Prestige Framed Sliding Tub Door			See page	140.
	AM00350	Euro Semi-Frameless Sliding Tub Door			See page	137.
Studio Bath Wall Set 60" x 32"		 High-impact polystyrene Center wall area free of shelving to provide easier movement Mounts directly to studs – no backer board needed 3/4" (19 mm) integral tile flange Tongue and groove inter-locking for alignment and to prevent water seepage Six integrated extra deep 4-1/2" (114 mm) shelves Includes two side walls and one back wall For use with 011 Arctic White 60" x 32" (1524 x 813 mm) bathtub models Nominal Dimensions: Side Panel 58" tall x 32" wide (1473 x 813 mm) Back Panel 58" tall w 60" wide (1472 x 1504 mm) 				
SR MAP	2946.BW	 58" tall x 60" wide (1473 x 1524 mm) Bath Wall Set 	111 lbs (50 kg)	7.86	011 Arctic	876

Luxury Series



Baths and Whirlpools

Acrylic Bathtubs		DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Studio® Bathing Pool With Fold Over Edge		 Apron-less design allowing for a custom finish to the tub apron Spacious bathing well High-gloss acrylic with fiberglass reinforcement Integral three-sided, 1" (25 mm) tiling/water retention flange helps prevent water seepage Design coordinates with Studio Bath Wall Set (sold separately) For recess installation Pre-leveled tub bottom for easier installation ADA compliant height Limited Lifetime Warrantee 	F			
	2946.112	Bathing Pool with right drain – RHO Nominal Dimensions: • 60" x 32" x 18" (1524 x 813 x 457 mm)	50 lbs (23 kg)	10.18	011 Arctic	844
	2946.212	Bathing Pool with left drain – LHO Nominal Dimensions: • 60" x 32" x 18" (1524 x 813 x 457 mm)	50 lbs (23 kg)	10.18	011 Arctic	844
	2973.112	Bathing Pool with right drain – RHO Nominal Dimensions: • 60" x 30" x 18" (1524 x 762 x 457 mm)	46 lbs (21 kg)	9.82	011 Arctic	839
	2973.212	Bathing Pool with left drain – LHO Nominal Dimensions: • 60" x 30" x 18" (1524 x 762 x 457 mm)	46 lbs (21 kg)	9.82	011 Arctic	839
		Required Components (specify finish):				
	1583.470	Universal drain				
	1640.305	Deep Soak [®] bathtub drain			See page	92.
		Separate Components (specify finish):				
	AM00750 AM00758	Prestige Framed Sliding Tub Door			See page	140.
	AM00350	Euro Semi-Frameless Sliding Tub Door			See page	137.
Studio Bath Wall Set 60" x 32"		 High-impact polystyrene Center wall area free of shelving to provide easier movement Mounts directly to studs – no backer board needed 3/4" (19 mm) integral tile flange Tongue and groove inter-locking for alignment and to prevent water seepage Six integrated extra deep 4-1/2" (114 mm) shelves Includes two side walls and one back wall For use with 011 Arctic White 60" x 32" (1524 x 813 mm) bathtub models Nominal Dimensions: Side Panel 58" tall x 32" wide (1473 x 813 mm) Back Panel 58" tall x 60" wide (1473 x 1524 mm) 				
	2946.BW	Bath Wall Set	25 lbs (11 kg)	7.86	011 Arctic	876

Luxury Series

American Standard

Baths and Whirlpools

Luxury Series

Acrylic Whirlpools	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Town Square® 5' x 42"	 Acrylic with fiberglass reinforcement Tub-for-two with center drain and dual backrests Integrated faucet/accessory deck areas Pre-leveled tub bottom Nominal Dimensions: 59-1/2" x 41-5/8" x 23" (1511 x 1057 x 584 mm) 				
2748.048WC	 EcoSilent[®] Whirlpool EverClean[®] System Single speed pump with air switch on/off Six multi-directional and flow-adjustable Clean Jets[™] including two in the lumbar area Quick connect Safe -T Heater connection system (must order Safe -T Heater separately) Ultra-quiet, makes 50% less noise Ultra-efficient, uses 45% less energy Electronic on/off control 	114 lbs (52 kg)	28.20	020 White	3,349
2748.068C	EverClean [®] Air Bath Perfectly smooth air jets around tub perimeter Double intensity lumbar back massage EverClean System Variable speed air blower with heater Programmable automatic purge with timer 	114 lbs (52 kg)	28.20	020 White	3,716
2748.448WC.K2	 EcoSilent Combo Massage System EcoSilent Whirlpool System EverClean Air Bath System Factory installed in-line whirlpool heater* Chromatherapy LED lighting system 	114 lbs (52 kg)	28.20	020 White	6,378
2748.002	Bathing Pool	70 lbs (32 kg)	28.20	020 White 011 Arctic	1,237 1,237
	Required Component (specify finish):			1	
1594.170	Town Square lever drain			002 Polished Chrome 295 Brushed Nickel	157 262
	Separate Components and Shower Doors (specify	finish):			
9075.120	Safe -T Heater (whirlpool only)*			See page	92.
AM00758 AM00750	Prestige Framed Sliding Tub Door			See page	140.
					137.

American Standard

Acrylic Whirlpools	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Town Square® 6' x 42"	 Acrylic with fiberglass reinforcement Tub-for-two with center drain and dual backrests Dual molded-in armrests Dual integrated faucet/accessory deck areas Pre-leveled tub bottom Nominal Dimensions: 				
0 8	• 71-1/2" x 41-3/4" x 22" (1816 x 1060 x 559 mm)				
2742.048WC	 EcoSilent[®] Whirlpool EverClean[®] System Single speed pump with air switch on/off Eight multi-directional and flow-adjustable Clean Jets[™] including two in the lumbar area Two silent air volume controls Quick connect Safe -T Heater connection system (must order Safe -T Heater separately) Ultra-quiet, makes 50% less energy Electronic on/off control 	138 lbs (63 kg)	28.20	020 White	3,605
2742.068C	 EverClean Air Bath Perfectly smooth air jets around tub perimeter Double intensity lumbar back massage EverClean System Variable speed air blower with heater Programmable automatic purge with timer 	138 lbs (63 kg)	28.20	020 White	4,008
2742.448WC.K2	 EcoSilent Combo Massage System EcoSilent Whirlpool System EverClean Air Bath System Factory installed in-line whirlpool heater* 	138 lbs (63 kg)	28.20	020 White	6,568
2742.002	Bathing Pool	101 lbs (46 kg)	28.20	020 White 011 Arctic	1,364 1,364
	Required Component (specify finish):			I	
1594.170	Town Square lever drain			002 Polished Chrome 295 Brushed Nickel	157 262
	Separate Components:				
9075.120	Safe -T Heater (whirlpool only)*			See page	92.

American Standard

Baths and Whirlpools

Bathing

Acrylic Bathtubs		DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Town Square® S Bathing Pools With Apron		 Spacious bathing well High-gloss acrylic with fiberglass reinforcement Integral apron with traditional styling Integral three-sided, 1" (25 mm) tiling/water retention flange helps prevent water seepage For alcove installation ADA compliant height Pre-leveled tub bottom for easier installation Limited Lifetime Warranty 				
	2544102	Bathing Pool with right drain – RHO Nominal Dimensions: • 60" x 32" x 19" (1524 x 813 x 483 mm)	84 lbs (38 kg)	14.10	020 White 222 Linen	975 1,023
	2544202	Bathing Pool with left drain – LHO Nominal Dimensions: • 60" x 32" x 19" (1524 x 813 x 483 mm)	84 lbs (38 kg)	14.10	020 White 222 Linen	975 1,023
	2545102	Bathing Pool with right drain – RHO Nominal Dimensions: • 60" x 30" x 19" (1524 x 762 x 483 mm)	80 lbs (36 kg)	14.10	020 White 222 Linen	965 1,013
	2545202	Bathing Pool with left drain – LHO Nominal Dimensions: • 60" x 30" x 19" (1524 x 762 x 483 mm)	80 lbs (36 kg)	14.10	020 White 222 Linen	965 1,013
Deep Soak [®] Bathtub	1640.305	Required Components (specify finish):				
Drain		 Unique overflow allows 2" (51 mm) deeper water level than standard bath drains Universal design works with most standard bathtubs Tap-actuated pop-up drain stopper ABS construction 		0.19	002 Polished Chrome 011 Arctic White 020 White 222 Linen 295 Brushed Nickel	138 185 154 185 248
Jniversal Bathtub Drain	1583.470	 Universal design works with all American Standard Master and Luxury Series baths and whirlpools Rotary knob controls pop-up drain stopper Brass construction 		0.10	002 Polished Chrome 011 Arctic White 020 White 295 Brushed Nickel	157 267 267 267
		Separate Components and Shower Doors (speci	fy finish):			
	9075.120	Safe -T Heater (whirlpool only)*			See page 92.	
	AM00758 AM00750	Prestige Framed Sliding Tub Door			See page 140.	
		Euro Semi-Frameless Sliding Tub Door			See page 137.	

Master Series: Whirlpools, Air Baths and Bathtubs

Master Series whirlpools, air baths and combo massage systems from American Standard[®] offer massage therapy options to satisfy any need, whether it's renewing aching muscles or soothing away the tensions of a hectic day. Available in a range of styles, sizes and shapes, it's easy to find the perfect model to complement any bathroom design.



Master Series

Standard Whirlpools

Standard whirlpools feature single speed motors with durable, air-activated on/off switches. All models also feature silent air controls that allow precise control of jet force levels. To ensure reliability, all pumps offer dry-run seal protection that keep them safe if accidentally run without water.

EverClean[®] Whirlpools

EverClean whirlpools offer all the benefits of our Standard Whirlpools, plus the EverClean System, a unique feature you'll only find at American Standard. Whirlpools with EverClean incorporate a silver-ion antimicrobial additive right into the circulation piping to protect the pipes from mold, mildew, algae and fungus that could cause deterioration or staining of the pipes.



Baths and Whirlpools

Bathing

Acrylic Whir	lpools	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Cadet [®] Corner		 Acrylic with fiberglass reinforcement Dual lumbar backrest positions Molded-in armrests with elbow supports Accessory deck area Pre-leveled tub bottom Wall Dimensions: 60" x 60" x 19-3/4" (1524 x 1524 x 502 mm) Installed Size: 85" x 60" x 19-3/4" (2159 x 1524 x 502 mm) 				
	2775.018WC	EverClean [®] Whirlpool • EverClean System • Single speed pump/motor • Side-mounted air switch on/off • Eight multi-directional and flow-adjustable Clean Jets [™] including two in the lumbar area • Two silent air volume controls • Quick connect Safe -T Heater connection system (must order Safe -T Heater separately)	110 lbs (50 kg)	40.70	020 White	2,563
	2775.018W	Standard Whirlpool • Same as 2775.018WC without EverClean System	110 lbs (50 kg)	40.70	020 White	2,279
	2775.002	Bathing Pool	81 lbs (37 kg)	40.70	020 White	1,442
Deep Soak®	1640.305	Required Components (specify finish):				1
Bathtub Drain		 Deep Soak bathtub drain (bathing pool only)* Unique overflow allows 2" (51 mm) deeper water level than standard bath drains Universal design works with most standard bathtubs Tap-actuated pop-up drain stopper ABS construction 		0.19	002 Polished Chrome 011 Arctic White 020 White 222 Linen 295 Brushed Nickel	138 185 154 185 248
Universal Bathtub Drain	1583.470	 Universal design works with all American Standard Master and Luxury Series baths and whirlpools Rotary knob controls pop-up drain stopper Brass construction 		0.10	002 Polished Chrome 011 Arctic White 020 White 295 Brushed Nickel	157 267 267 267
		Separate Components:				
	9075.120	Safe -T Heater (whirlpool only) [†]				
	751755-100	Universal tile bead kit – includes 15' (4.6 m) roll of tile b a 15' (4.6 m) roll of adhesive	bead and		See page 92.	
	9330.014	Universal tile bead adhesive (bulk) – 30' (9.1 m) roll of	f adhesive	ONLY		

* Deep Soak bathtub drain provides an additional 2" (51 mm) of water depth for a more luxurious bath.

American Standard

Baths and Whirlpools

Acrylic with fiberglass reinforcement				
 Form-fitted backrest Molded-in armrests with elbow supports Dual accessory deck area Pre-leveled tub bottom Nominal Dimensions: 72" x 42" x 19-3/4" (1829 x 1067 x 502 mm) 				
 WC EverClean[®] Whirlpool EverClean System Single speed pump/motor Side-mounted air switch on/off Eight multi-directional and flow-adjustable Clean Jets[™] including two in the lumbar area Two silent air volume controls Quick connect Safe -T Heater connection system (must order Safe -T Heater separately) 	122 lbs (55 kg)	28.20	020 White	2,154
Standard Whirlpool • Same as 2774.018WC without EverClean System	122 lbs (55 kg)	28.20	020 White	1,920
02 Bathing Pool	83 lbs (38 kg)	28.20	020 White	1,132
18 6' (182.9 cm) Apron	21 lbs (9.5 kg)	0.95	020 White	365
05 Required Components (specify finish):				
 Deep Soak bathtub drain (bathing pool only)* Unique overflow allows 2" (51 mm) deeper water level than standard bath drains Universal design works with most standard bathtubs Tap-actuated pop-up drain stopper ABS construction 		0.19	002 Polished Chrome 011 Arctic White 020 White 222 Linen 295 Brushed Nickel	138 185 154 185 248
 • Universal design works with all American Standard Master and Luxury Series baths and whirlpools • Rotary knob controls pop-up drain stopper • Brass construction 		0.10	002 Polished Chrome 011 Arctic White 020 White 295 Brushed Nickel	157 267 267 267
Separate Components:			1	
20 Safe -T Heater (whirlpool only) [†]				
00 Universal tile bead kit – includes 15' (4.6 m) roll of tile l a 15' (4.6 m) roll of adhesive	bead and		See page 92.	
Universal tile bead adhesive (bulk) – 30' (9.1 m) roll o	fadhesive	ONLY		
11 .0 .3	 Pre-leveled tub bottom Nominal Dimensions: 72" x 42" x 19-3/4" (1829 x 1067 x 502 mm) 8WC EverClean® Whirlpool EverClean® System Single speed pump/motor Side-mounted air switch on/off Eight multi-directional and flow-adjustable Clean Jets" including two in the lumbar area Two silent air volume controls Quick connect Safe -T Heater connection system (must order Safe -T Heater separately) 18W Standard Whirlpool Same as 2774.018WC without EverClean System Bathing Pool 6' (182.9 cm) Apron Deep Soak bathtub drain (bathing pool only)" Unique overflow allows 2" (51 mm) deeper water level than standard bath drains Universal design works with most standard bathtubs Tap-actuated pop-up drain stopper ABS construction 470 Universal design works with all American Standard Master and Luxury Series baths and whirlpools Retary knob controls pop-up drain stopper Brass construction	 Pre-leveled tub bottom Nominal Dimensions: 72" x 42" x 19-3/4" (1829 x 1067 x 502 mm) T2" x 42" x 19-3/4" (1829 x 1067 x 502 mm) BWC EverClean® Whirlpool EverClean® Whirlpool Single speed pump/motor Side-mounted air switch on/off Eight multi-directional and flow-adjustable Clean Jets" including two in the lumbar area. Two silent air volume controls Quick connect Safe -T Heater connection system (must order Safe -T Heater separately) Bathing Pool 83 lbs (38 kg) Casme as 2774.018WC without EverClean System (9.5 kg) Same as 2774.018WC without EverClean System (9.5 kg) Casme as 2774.018WC without EverClean System (9.5 kg) Case Sconstruction 21 lbs (9.5 kg) Case Sconstruction 21 lbs (9.5 kg) Tap-actuated pop-up drain (bathing pool only)* Universal design works with all American Standard bath drains Universal design works with all American Standard bath drains Fotary knob controls pop-up drain stopper ABS construction Safe -T Heater (whirlpool only)* Universal tile bead kit – includes 15' (4.6 m) roll of tile bead and a 15' (4.6 m) roll of adhesive 	 Pre-leveled tub bottom Nominal Dimensions: • 72" x 42" x 19-3/4" (1829 x 1067 x 502 mm) T2" x 42" x 19-3/4" (1829 x 1067 x 502 mm) T2" x 42" x 19-3/4" (1829 x 1067 x 502 mm) EverClean System • Single speed pump/motor • Side-mounted air switch on/off • Sight multi-directional and flow-adjustable Clean Jets" including two in the lumbar area • Two silent air volume controls • Quick connect Safe - T Heater connection system (must order Safe - T Heater separately) Standard Whirlpool • Same as 2774.018WC without EverClean System (55 kg) 28.20 (38 kg) 28.20 (38 kg) 28.20 (38 kg) 28.20 (95 kg) 0.95 (95 kg) 0.19 (95 kg) 0.19 (19 (190 coverflow allows 2" (51 mm) deeper water level than standard bath drains - Universal design works with most standard bathrubus - Tap-actuated pop-up drain stopper - ABS construction Separate Components: Safe -T Heater (whirlpool only)* - Universal design works with all American Standard Master and Luxury Series baths and whirlpools - Roady knob controls pop-up drain stopper - Brass construction Safe -T Heater (whirlpool only)* Universal tile bead kit – includes 15' (4.6 m) ro	 Pre-leveled tub bottom Nominal Dimensions: - 72" x 42" x 19-3/4" (1829 x 1067 x 502 mm) I22 lbs - VerClean System - Single speed pump/motor - Subic speed pump/motor - Tap-actuated pop-up drain stopper - ABS construction - Subic speed pump/motor speed pump/motor - Rotary knob controls pop-up drain stopper - Botary knob co

* Deep Soak® bathtub drain provides an additional 2" (51 mm) of water depth for a more luxurious bath.

American Standard

Baths and Whirlpools

Acrylic Whirlp	pools	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Cadet® 6' x 36"		 Acrylic with fiberglass reinforcement Form-fitted backrest Molded-in armrests with elbow supports Dual accessory deck area Pre-leveled tub bottom Nominal Dimensions: 72" x 35-3/4" x 19-3/4" (1829 x 908 x 502 mm) 				
0.0	2773.018WC	EverClean [®] Whirlpool • EverClean System • Single speed pump/motor • Side-mounted air switch on/off • Eight multi-directional and flow-adjustable Clean Jets [™] including two in the lumbar area • Two silent air volume controls • Quick connect Safe -T Heater connection system (must order Safe -T Heater separately)	126 lbs (57 kg)	24.40	020 White	2,116
	2773.018W	Standard Whirlpool • Same as 2773.018WC without EverClean System	126 lbs (57 kg)	24.40	020 White	1,883
	2773.002	Bathing Pool	80 lbs (38 kg)	24.40	020 White	1,079
SR MAP	9272.018	6' (182.9 cm) Apron	21 lbs (9.5 kg)	0.95	020 White	365
		Required Components (specify finish):				
Deep Soak® Bathtub Drain	1640.305	 Deep Soak bathtub drain (bathing pool only)* Unique overflow allows 2" (51 mm) deeper water level than standard bath drains Universal design works with most standard bathtubs Tap-actuated pop-up drain stopper ABS construction 		0.19	002 Polished Chrome 011 Arctic White 020 White 222 Linen 295 Brushed Nickel	138 185 154 185 248
Universal Bathtub Drain	1583.470	 Universal design works with all American Standard Master and Luxury Series baths and whirlpools Rotary knob controls pop-up drain stopper Brass construction 		0.10	002 Polished Chrome 011 Arctic White 020 White 295 Brushed Nickel	157 267 267 267
		Separate Components:	1	1	1	
	9075.120	Safe -T Heater (whirlpool only)†				
	751755-100	Universal tile bead kit – includes 15' (4.6 m) roll of tile a 15' (4.6 m) roll of adhesive	e bead and		See page 92.	
	9330.014	Universal tile bead adhesive (bulk) - 30' (9.1 m) roll	of adhesive	ONLY		

* Deep Soak® bathtub drain provides an additional 2" (51 mm) of water depth for a more luxurious bath.

American Standard

Acrylic Whirlp	ools	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Cadet® 5' x 42"		 Acrylic with fiberglass reinforcement Form-fitted backrest Molded-in armrests with elbow supports Dual accessory deck area Pre-leveled tub bottom Nominal Dimensions: 60" x 42" x 19-3/4" (1524 x 1067 x 502 mm) 				
2	2772.018WC	.018WC EverClean® Whirlpool 105 lbs 28.2 • EverClean System (48 kg) (48 kg) • Single speed pump/motor Side-mounted air switch on/off (48 kg) 28.2 • Eight multi-directional and flow-adjustable Clean Jets™ including two in the lumbar area 105 lbs (48 kg) • Two silent air volume controls Quick connect Safe -T Heater connection system (must order Safe -T Heater separately) 105 lbs 105 lbs 105 lbs	28.20	020 White	2,076	
	2772.018W	Standard Whirlpool Same as 2772.018WC without EverClean System 	105 lbs (48 kg)	28.20	020 White	1,840
	2772.002	Bathing Pool	72 lbs (33 kg)	28.20	020 White	1,058
	9260.018	5' (152.4 cm) Apron	21 lbs (9.5 kg)	0.84	020 White	340
		Required Components (specify finish):				
	1640.305	Deep Soak [®] bathtub drain (bathing pool only)*				
	1583.470	Universal drain			See page	92.
		Separate Components and Shower Doors (specify	finish):			
	9075.120	Safe -T Heater (whirlpool only) [†]				
	751755-100	Universal tile bead kit – includes 15' (4.6 m) roll of tile be a 15' (4.6 m) roll of adhesive	ad and		See page	92.
	9330.014	Universal tile bead adhesive (bulk) – 30' (9.1 m) roll of a	dhesive ONI	_Y		
	AM00758 AM00750	Prestige Framed Sliding Tub Door			See page 140.	
	Amooroo					

* Deep Soak® bathtub drain provides an additional 2" (51 mm) of water depth for a more luxurious bath.

American Standard

Baths and Whirlpools

Acrylic Whirlp	ools	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Cadet [®] 5' x 36"		 Acrylic with fiberglass reinforcement Form-fitted backrest Molded-in armrests with elbow supports Dual accessory deck area Pre-leveled tub bottom 				
		Nominal Dimensions: • 60" x 36" x 19-3/4" (1524 x 914 x 502 mm)				
E.	2771.018WC	EverClean [®] Whirlpool • EverClean System • Single speed pump/motor • Side-mounted air switch on/off • Eight multi-directional and flow-adjustable Clean Jets [™] including two in the lumbar area • Two silent air volume controls • Quick connect Safe -T Heater connection system (must order Safe -T Heater separately)	111 lbs (50 kg)	24.40	020 White	1,992
	2771.018W	Standard Whirlpool Same as 2771.018WC without EverClean System 	111 lbs (50 kg)	24.40	020 White	1,752
	2771.002	Bathing Pool	76 lbs (35 kg)	24.40	020 White	1,017
	9260.018	5' (152.4 cm) Apron	21 lbs (9.5 kg)	0.84	020 White	340
		Required Components (specify finish):				
	1640.305	Deep Soak® bathtub drain (bathing pool only)*				
	1583.470	Universal drain			See page	92.
		Separate Components and Shower Doors (speci	fy finish):			
	9075.120	Safe -T Heater (whirlpool only) [†]				
	751755-100	Universal tile bead kit – includes 15' (4.6 m) roll of tile bead and a 15' (4.6 m) roll of adhesive			See page 92.	
	9330.014	Universal tile bead adhesive (bulk) – 30' (9.1 m) roll of adhesive ONLY				
	AM00758 AM00750	Prestige Framed Sliding Tub Door			See page 140.	
	AM00350	Euro Semi-Frameless Sliding Tub Door			See page 137.	

* Deep Soak® bathtub drain provides an additional 2" (51 mm) of water depth for a more luxurious bath.

American Standard

Acrylic Whirlp	ools	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Cadet [®] 5' x 32"		 Acrylic with fiberglass reinforcement Form-fitted backrest Molded-in armrests with elbow supports Dual accessory deck area Pre-leveled tub bottom Nominal Dimensions: 59-7/8" x 31-3/4" x 19-3/4" (1521 x 806 x 502 m) 	m)			
	2770.018WC	EverClean [®] Whirlpool • EverClean System • Single speed pump/motor • Side-mounted air switch on/off • Eight multi-directional and flow-adjustable Clean Jets [™] including two in the lumbar area • Two silent air volume controls • Quick connect Safe -T Heater connection system (must order Safe -T Heater separately)	93 lbs (42 kg)	20.40	020 White	1,923
	2770.018W	Standard Whirlpool • Same as 2770.018WC without EverClean System	93 lbs (42 kg)	20.40	020 White	1,691
	2770.002	Bathing Pool	63 lbs (29 kg)	20.40	020 White	960
	9260.018	5' (152.4 cm) Apron	21 lbs (9.5 kg)	0.84	020 White	340
		Required Components (specify finish):				
	1640.305	Deep Soak [®] bathtub drain (bathing pool only)*				
	1583.470	Universal drain			See page	92.
		Separate Components and Shower Doors (spe	cify finish)			
	9075.120	Safe -T Heater (whirlpool only) [†]				
	751755-100 Universal tile bead kit – includes 15' (4.6 m) roll of tile bead and a 15' (4.6 m) roll of adhesive				See page	e 92.
	9330.014	Universal tile bead adhesive (bulk) – 30' (9.1 m) roll of adhesive ONLY				
	AM00758 AM00750	Prestige Framed Sliding Tub Door			See page 140.	
	Amooroo					

* Deep Soak® bathtub drain provides an additional 2" (51 mm) of water depth for a more luxurious bath.

† Electric heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

American Standard

Baths and Whirlpools

Acrylic Whirlpo	ools	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Cadet [®] With Integral Apro 5' x 32"	on	 Acrylic with fiberglass reinforcement Integral apron with removable access panel Integral 3-sided tile/water retention flange Dual molded-in armrests with elbow supports 				
	•	Nominal Dimensions: • 59-7/8" x 32" x 20" (1521 x 813 x 508 mm)				
:	2776.118WC	 EverClean[®] Whirlpool – right-hand outlet EverClean System Single speed pump/motor Eight multi-directional and flow-adjustable Clean Jets[™] including two in the lumbar area Two silent air volume controls Deck-mounted air switch on/off 	96 lbs (44 kg)	21.60	020 White	2,300
:	2776.218WC	EverClean Whirlpool – left-hand outlet	96 lbs (44 kg)	21.60	020 White	2,300
	2776.118W	Standard Whirlpool – right-hand outlet • Same as 2776.118WC without EverClean System	96 lbs (44 kg)	21.60	020 White	2,084
	2776.218W	Standard Whirlpool – left-hand outlet • Same as 2776.218WC without EverClean System	96 lbs (44 kg)	21.60	020 White	2,084
	2776.102	Bathing Pool – right-hand outlet	66 lbs (30 kg)	21.60	020 White	1,046
	2776.202	Bathing Pool – left-hand outlet	66 lbs (30 kg)	21.60	020 White	1,046
Deep Soak [®] Bathtub	1640.305	Required Components (specify finish):				
Drain		 Deep Soak bathtub drain (bathing pool only)* Unique overflow allows 2" (51 mm) deeper water level than standard bath drains Universal design works with most standard bathtubs Tap-actuated pop-up drain stopper ABS construction 		0.19	002 Polished Chrome 011 Arctic White 020 White 222 Linen 295 Brushed Nickel	138 185 154 185 248
Universal Bathtub Drain	1583.470	 Universal design works with all American Standard Master and Luxury Series baths and whirlpools Rotary knob controls pop-up drain stopper Brass construction 		0.10	002 Polished Chrome 011 Arctic White 020 White 295 Brushed Nickel	157 267 267 267
		Separate Components and Shower Doors (spec	ify finish):	1	1	
	AM00758 AM00750	Prestige Framed Sliding Tub Door			See page 140.	
	AM00350	Euro Semi-Frameless Sliding Tub Door			See page 137.	

* Deep Soak® bathtub drain provides an additional 2" (51 mm) of water depth for a more luxurious bath.

Acrylic Whirlpools	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE		
Savona® Oval	 Acrylic with fiberglass reinforcement Molded-in backrest with dual integral armrests Pre-leveled tub bottom 						
	Nominal Dimensions: • 60" x 42-1/4" x 21-1/4" (1524 x 1073 x 540 mm)						
2903.018WC	 EverClean[®] Whirlpool EverClean System Single speed pump/motor Deck-mounted air switch on/off Eight multi-directional and flow-adjustable Clean Jets[™] Two silent air volume controls Quick connect Safe -T Heater connection system (must order Safe -T Heater separately) 	87 lbs (40 kg)	28.20	020 White	2,091		
2903.002 SR MAP	Bathing Pool	67 lbs (30 kg)	28.20	020 White	970		
	Required Components (specify finish):						
1640.305	Deep Soak® bathtub drain (bathing pool only)*			_			
1583.470	Universal drain			See page 92.			
	Separate Component:		1				
9075.120	Safe -T Heater (whirlpool only) [†]			See page 92.			

* Deep Soak® bathtub drain provides an additional 2" (51 mm) of water depth for a more luxurious bath.


† Electric heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

Master Series

Americast[®]

Americast Engineered Steel A Remarkable Alternative to Cast Iron

Americast is American Standard's unique process that bonds a high quality porcelain enamel surface with an enameling grade steel and a molded reinforcement composite backing. Americast is durable and weighs less than cast iron so it costs less to install. It is engineered to create tubs of unequaled strength, durability and weight. This composite is similar to those used in aerospace and automotive industries, and provides consistent structural integrity along with sound dampening, heat insulation and protection against impact damage. Unlike anything on the market, Americast combines the best qualities of three different techniques in a process that provides beauty, safety and reliability in today's baths.

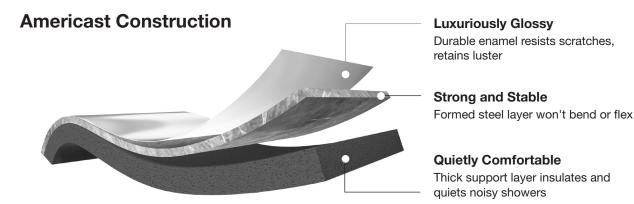

Better Heat Retention

The material composition and construction of Americast tubs provides better heat retention than cast iron or enameled steel tubs.

Lumbar Support and Beveled Headrest

Americast tubs are contoured for increased lower back support and improved head and neck comfort.

Luxury Ledge

This feature adds 4" (102 mm) of ledge space for increased shoulder and elbow room or a perfect spot for extra storage (optional feature).

StanSure[™] Slip-Resistant Floor

- Full slip-resistant coverage increases bathroom safety
- covers 56% more of the tub floor
- Easier to clean and stays cleaner longer
- Brighter, white textured surface that is more visually appealing

Tile Edge

This oversized flange ensures more tile/tub overlap, and decreases the chance of water reaching and damaging drywall or structural timbers. Best of all, it is designed not to interfere with normal tile application, or require any extra time to install.

Americast Meets Code

Americast Bathtubs and Whirlpools conform to industry specifications including:

- ASTM F462 Slip Resistance
- ANSI Z 124.1 Ignition Test
- All whirlpool models are UL listed as hydromassage units



Americast[®] Enameled Steel

Luxury Americast Whirlpools	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE	
Cambridge® With Integral Apron 5' x 32"	 Americast Brand engineered steel Acid resistant porcelain finish Recessed bath with integral apron and tiling flange Integral lumbar support with beveled headrest Single speed pump/motor Six multi-directional and flow-adjustable Clean Jets[™] Two silent air volume controls Air switch on/off Full Stansure[™] slip-resistant floor surface Quick connect Safe -T Heater connection system (must order Safe -T Heater separately) Nominal Dimensions: 60" x 32" x 17-3/4" (1524 x 813 x 451 mm) 					
2461.028WC	Americast Whirlpool with EverClean [®] right-hand outlet	129 lbs (59 kg)	15.28	020 White	3,155	
2460.028WC	Americast Whirlpool with EverClean left-hand outlet	129 lbs (59 kg)	15.28	020 White	3,155	
2461.002	Bathing Pool – right-hand outlet	118 lbs (54 kg)	15.28	020 White 011 Arctic 222 Linen	1,029 1,029 1,224	
2460.002	Bathing Pool – left-hand outlet	118 lbs (54 kg)	15.28	020 White 011 Arctic 222 Linen	1,029 1,029 1,224	
	Required Components (specify finish):					
1640.305	Deep Soak [®] bathtub drain (bathing pool only)*					
1583.470	Universal drain			See page	92.	
	Separate Components and Shower Doors (specify finish):					
9075.120	Safe -T Heater (whirlpool only)†			See page	92.	
AM00758 AM00750	Prestige Framed Sliding Tub Door	See page	e 140.			
AM00350	Euro Semi-Frameless Sliding Tub Door	See page 137.				

* Deep Soak® bathtub drain provides an additional 2" (51 mm) of water depth for a more luxurious bath.

Americast

American Standard

Americast[®] Enameled Steel

Luxury Americast Whirlpools	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE		
Stratford® 5-1/2' x 32"	 Americast Brand engineered steel Acid resistant porcelain finish Recessed bath with integral apron Integral lumbar support with beveled headrest Full StanSure[™] slip-resistant surface End drain outlet Nominal Dimensions: 66" x 32" x 20" (1676 x 813 x 508 mm) 						
★2470.002	Bathing Pool	151 lbs (69 kg)	16.18	020 White	1,534		
	Required Components (specify finish):						
1640.305	Deep Soak® bathtub drain (bathing pool only)*						
1583.470	Universal drain			See page	See page 92.		
	Separate Components:						
751755-100	Universal tile bead kit – includes 15' (4.6 m) roll of tile b roll of adhesive	See pag	e 92.				
9330.014	Universal tile bead adhesive (bulk) - 30' (9.1 m) roll of	adhesive ONI	Y				

* Deep Soak® bathtub drain provides an additional 2" (51 mm) of water depth for a more luxurious bath.



Americast[®] Enameled Steel

Americast B	athtubs	DESCRIPTION		NET WEIGHT	PTS	COLORS	LIST Price
Princeton® With Integral Apron 5' x 30"		 Americast brand engineered steel Glossy porcelain finish Recessed bath with integral apron and tiling flange Integral lumbar support Beveled headrest Full Stansure[™] slip-resistant floor surface End drain outlet Integral leveling base 	ÂDA				
		Nominal Dimensions: • 60" x 30" x 14" (1524 x 762 x 356 mm)					
	2391.202	Americast Bath – right-hand outlet		88 lbs (39 kg)	6.11	020 White 011 Arctic 021 Bone 222 Linen	540 540 703 703
	2390.202	Americast Bath – left-hand outlet		88 lbs (39 kg)	6.11	020 White 011 Arctic 021 Bone 222 Linen	540 540 703 703
		Required Components (specify finish):	1			· /	
	1640.305	Deep Soak® bathtub drain*				2	~~
	1583.470	Universal drain				See page	92.
Princeton Integral Drain Bath		 Same as 2391.202/2390.202 except with: Integral factory installed overflow Saves labor and material costs Drain stopper and escutcheon included 	ADA				
		Nominal Dimensions: • 60" x 30" x 14" (1524 x 762 x 356 mm)					
	2391.202ICH	 Americast Bath – ICH, right-hand outlet Drain and overflow cover/escutcheon in chrome 		89 lbs (40 kg)	6.11	020 White	596
	2390.202ICH	 Americast Bath – ICH, left-hand outlet Drain and overflow cover/escutcheon in chrome 		89 lbs (40 kg)	6.11	020 White	596
	791165-0020A	Oval Escutcheon (furnished with integral drain baths)			0.03	002 Polished Chrome	24
0.000	791474-0020A	Lift and turn drain assembly (furnished with integral drain baths)				002 Polished Chrome	83
Ø	⊳ 791363-0070A	ICH test plug kit		0.29 lbs (0.13 kg)			29
		Separate Components and Shower Doors (spe	ecify fir	nish):		·	
AM00758 AM00750 AM00350		Prestige Framed Sliding Tub Door				See page	140.
		Euro Semi-Frameless Sliding Tub Door			See page 137.		

* Deep Soak® bathtub drain provides an additional 2" (51 mm) of water depth for a more luxurious bath.

> Parts Program (Non-Premier)

Americast[®] Enameled Steel

Bathing

Americast Bathtubs	6	DESCRIPTION	v	NET /EIGHT	PTS	COLORS	LIST Price
Princeton® Above Floor Rough i' x 30"		 Americast brand engineered steel Above-floor rough installation Glossy porcelain finish Recessed bath with integral apron and tiling flange Integral lumbar support Beveled headrest Full Stansure[™] slip-resistant floor surface End drain outlet Integral leveling base Nominal Dimensions: 60" x 30" x 17-1/2" (1524 x 762 x 445 mm) 	Δ) Δ				
23	93.202	Americast Bath – right-hand outlet		92 lbs 1.7 kg)	7.33	020 White 021 Bone 222 Linen	821 1,034 1,034
23	92.202	Americast Bath – left-hand outlet		92 lbs 1.7 kg)	7.33	020 White 021 Bone 222 Linen	821 1,034 1,034
		Required Components (specify finish):					
1640.305		Deep Soak [®] bathtub drain*				See page 92.	
15	83.470	Universal drain				000 page 02.	
rinceton Itegral Drain bove Floor Rough		 Same as 2393.202/2392.202 except with: Integral factory installed overflow Saves labor and material costs Drain stopper and escutcheon included Nominal Dimensions: 60" x 30" x 17-1/2" (1524 x 762 x 445 mm) 					
2393.	202ICH	 Americast Bath – ICH, right-hand outlet Drain and overflow cover/escutcheon in chrome 		93 lbs 42 kg)	7.30	020 White	896
2392.	202ICH	 Americast Bath – ICH, left-hand outlet Drain and overflow cover/escutcheon in chrome 		93 lbs 12 kg)	7.33	020 White	896
791165	-0020A	Oval Escutcheon (furnished with integral drain baths)			0.03	002 Polished Chrome	24
791165-	-0020A	Lift and turn drain assembly (furnished with integral drain baths)				002 Polished Chrome	83
⊘ ⊳791363-	-0070A	ICH test plug kit		29 lbs .13 kg)			29
		Separate Components and Shower Doors (spec	ify finis	h):			
	A00758 A00750					See page 140.	
A.B.	/00350	Euro Semi-Frameless Sliding Tub Door			See page 137.		

* Deep Soak® bathtub drain provides an additional 2" (51 mm) of water depth for a more luxurious bath.

▷ Parts Program (Non-Premier)

American Standard

Americast[®] Enameled Steel

Americast Bathtu	ıbs	DESCRIPTION		NET WEIGHT	NET	COLORS	list Price
rinceton® uxury Ledge x 34"		 Americast brand engineered steel Glossy porcelain finish Recessed bath with integral apron and tiling flange Extra wide ledge for placement of toiletries Integral lumbar support Beveled headrest Full Stansure[™] slip-resistant floor surface End drain outlet Integral leveling base Nominal Dimensions:	(Å)				
		• 60" x 34" x 14" (1524 x 864 x 356 mm)					
	2395.202	Americast Bath with Luxury Ledge right-hand outlet		94 lbs (42.5 kg)	6.55	020 White 021 Bone 222 Linen	635 806 806
	2394.202	Americast Bath with Luxury Ledge left-hand outlet		94 lbs (42.5 kg)	6.55	020 White 021 Bone 222 Linen	635 806 806
		Required Components (specify finish):					
1640.305 1583.470		Deep Soak® bathtub drain*			See page 92.		
		Universal drain				See page	92.
rinceton itegral Drain uxury Ledge		 Same as 2395.202/2394.202 except with: Integral factory installed overflow Saves labor and material costs Drain stopper and escutcheon included Nominal Dimensions: 60" x 34" x 14" (1524 x 864 x 356 mm) 	(Å)				
23	95.202ICH	 Americast Bath – ICH, right-hand outlet Drain and overflow cover/escutcheon in chrome 		95 lbs (43 kg)	8.10	020 White	711
23	94.202ICH	 Americast Bath – ICH, left-hand outlet Drain and overflow cover/escutcheon in chrome 		95 lbs (43 kg)	8.10	020 White	711
	65-0020A	Oval Escutcheon (furnished with integral drain baths)			0.03	002 Polished Chrome	24
7914	174-0020A	Lift and turn drain assembly (furnished with integral drain baths)				002 Polished Chrome	83
	863-0070A	ICH test plug kit		0.29 lbs (0.13 kg)			29
		Separate Components and Shower Doors (s	pecify fi	nish):			
	AM00758 AM00750	Prestige Framed Sliding Tub Door				See page	140.
	AM00350	Euro Semi-Frameless Sliding Tub Door			See page 137.		

* Deep Soak® bathtub drain provides an additional 2" (51 mm) of water depth for a more luxurious bath.

▷ Parts Program (Non-Premier)

Americast[®] Enameled Steel

Bathing

Americast Bathtubs	;	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Princeton® Above Floor Rough Luxury Ledge 5' x 34"		 Americast brand engineered steel Above-floor rough installation Glossy porcelain finish Recessed bath with integral apron and tiling flange Extra wide ledge for placement of toiletries Integral lumbar support Beveled headrest Full Stansure™ slip-resistant floor surface End drain outlet Integral leveling base Nominal Dimensions: 60" x 34" x 17-1/2" (1524 x 864 x 445 mm) 				
23	97.202	Americast Bath with Luxury Ledge right-hand outlet	100 lbs (45 kg)	8.10	020 White	1,051
23	96.202	Americast Bath with Luxury Ledge left-hand outlet	100 lbs (45 kg)	8.10	020 White	1,051
		Required Components (specify finish):				
16	40.305	Deep Soak [®] bathtub drain*			_	
1583.470		Universal drain			See page	92.
rrinceton Integral Drain bove Floor Rough uxury Ledge	1	 Same as 2397.202/2396.202 except with: Integral factory installed overflow Saves labor and material costs Drain stopper and escutcheon included Nominal Dimensions: 60" x 34" x 17-1/2" (1524 x 864 x 445 mm) 				
2397.2	202ICH	 Americast Bath – ICH, right-hand outlet Drain and overflow cover/escutcheon in chrome 	101 lbs (46 kg)	8.10	020 White	1,167
2396.2	202ICH	 Americast Bath – ICH, left-hand outlet Drain and overflow cover/escutcheon in chrome 	101 lbs (46 kg)	8.10	020 White	1,167
791165-	0020A	Oval Escutcheon (furnished with integral drain baths)		0.03	002 Polished Chrome	24
791474- ► 791363-	0020A	Lift and turn drain assembly (furnished with integral drain baths)			002 Polished Chrome	83
⊳ 791363-	0070A	ICH test plug kit	0.29 lbs (0.13 kg)			29
		Separate Components and Shower Doors (speci	fy finish):			
	100758 100750	Prestige Framed Sliding Tub Door			See page	140.
	100350	Euro Semi-Frameless Sliding Tub Door			See page	

* Deep Soak® bathtub drain provides an additional 2" (51 mm) of water depth for a more luxurious bath.

▷ Parts Program (Non-Premier)

American Standard

Enameled Steel

Enameled Steel Bathtubs		DESCRIPTION		NET WEIGHT	PTS	COLORS	LIST PRICE
New Solar® Above Floor Rough 5' x 30"	5	 Porcelain on steel construction For recessed above-floor installation Full Stansure[™] slip-resistant floor surface Integral apron Nominal Dimensions: 60" x 30" x 16-5/8" (1524 x 762 x 422 mm) 	Â				
	0263.112	Recess Bath – right-hand outlet		82 lbs (37 kg)	7.33	020 White 222 Linen	454 500
	0263.212	Recess Bath – left-hand outlet		82 lbs (37 kg)	7.33	020 White 222 Linen	454 500
		Required Components (specify finish):					
	1640.305	Deep Soak® bathtub drain*				_	
	1583.470	Universal drain				See page	e 92.
		Separate Components and Shower Doors (sp	pecify fi	nish):			
	AM00758 AM00750	Prestige Framed Sliding Tub Door				See page 140.	
	AM00350	Euro Semi-Frameless Sliding Tub Door		See page 137.			
New Salem® 5' x 30"		 Porcelain on steel construction Conventional recessed installation Integral apron Full Stansure slip-resistant floor surface Nominal Dimensions: 60" x 30" x 14-1/4" (1524 x 762 x 362 mm) 	Â				
	0255.112	Recess Bath – right-hand outlet		80 lbs (36 kg)	6.11	020 White	426
	0255.212	Recess Bath – left-hand outlet		80 lbs (36 kg)	6.11	020 White	426
		Required Components (specify finish):		11			
	1640.305	Deep Soak [®] bathtub drain*					
	1583.470	Universal drain				See page	ə 92.
		Separate Components and Shower Doors (sp	pecify fi	nish):			
	AM00758 AM00750	Prestige Framed Sliding Tub Door		-		See page	e 140.
	AM00350					See page 137.	

* Deep Soak® bathtub drain provides an additional 2" (51 mm) of water depth for a more luxurious bath.

Enameled Steel



Frameless/Semi-Frameless Shower Doors

Sleek and sophisticated with frameless glass edges



Semi-Frameless Doors


Clean lines with outer frame support and frameless glass edges

- 1/4" tempered glass
- Select from up to three frame finishes
- Through-the-glass handles
- Easy to clean/open bottom track



Sliding Doors

Swing Door for Shower





Framed Doors

Both outer and glass edges feature frame support

Sliding Doors for Bath and Shower

- Easy to clean bottom track system
- Two towel bars
- Select from three frame finishes



Neo-Angle

- Perfect shower solution for small bathrooms
- Reversible on install for a left or
- right swing
- Drip rail system keeps water in shower
 Select from three frame finishes

Swing

- Reversible on install for a left or right swing
- Multiple glass styles
- Silver frame finish



Made In

U.S.A.



Semi/Frameless Doors

Frameless/Semi-Frameless Shower Doors	DESCRIPTION	NET WEIGHT	COLOR/FINISH	LIST PRICE
Bemi-Frameless Top-Roller Sliding shower Doors 6" Height	 Top-roller shower door Minimum 2-3/4" (70 mm) threshold width required 3/8" (9 mm) safety tempered glass Exterior through-the-glass towel bar and back-to-back pull knob Both panels slide Easy-to-clean glass coating repels moisture and soap film Reversible installation for left or right entry 			0
	Overall Height: 76" (1930 mm)	A contract of		
AM00810.400	Clear • Fits opening: 44" – 48" (1118 – 1219 mm)		213 Silver 006 Brushed Nickel	1,752 2,279
AM00811.400	Clear • Fits opening: 56" – 60" (1422 – 1524 mm)		213 Silver 006 Brushed Nickel	2,095 2,723
Bemi-Frameless Fop-Roller Sliding Shower Doors 0" Height	 Top-roller shower door Minimum 2-3/4" (70 mm) threshold width required 1/4" (6 mm) clear safety-tempered glass Exterior through-the-glass towel bar and back-to-back knob Easy-to-clean glass coating helps prevent water spots and film Reversible installation for left or right entry 			
	Overall Height: 70" (1778 mm)			
AM00821.400	Clear • Fits opening: 44" – 48" (1118 – 1219 mm)		213 Silver 006 Brushed Nickel	1,220 1,586
AM00822.400	Clear • Fits opening: 56" – 60" (1422 – 1524 mm)		213 Silver 006 Brushed Nickel	1,318 1,713

American Standard

Semi/Frameless Doors

Tub and Shower Doors

Frameless Shower Doors	DESCRIPTION	NET WEIGHT	COLOR/FINISH	LIST Price
Frameless Shower Doors With Panel	 Frameless swing door and panel 3/8" (9 mm) thick clear safety tempered glass 8" (203 mm) through-the-glass C-pull handle Minimum 2-1/2" (64 mm) threshold width required Easy-to-clean glass coating repels moisture and soap film Reversible for left or right installation 			
	Overall Height: 72" (1829 mm)			
AM00814.400	Clear • Fits opening: 46-1/16" – 47-9/16" (1170 – 208 mm)	84 lbs (38 kg)	213 Silver 006 Brushed Nickel	1,728 2,246
AM00812.400	Clear • Fits opening: 58-1/16" – 59-9/16" (1475 – 1513 mm)	84 lbs (38 kg)	213 Silver 006 Brushed Nickel	1,775 2,307
Frameless Shower Screen	 Frameless shower screen 3/8" (9 mm) thick clear safety tempered glass Stationary panel – does not swing Minimum 1" (25 mm) threshold width required Leaves open space to enter 48" – 60" (1219 – 1524 mm) shower Not intended to span entire length of shower Easy-to-clean glass coating helps prevent water spots and film 			
	Overall Height: 76" (1930 mm)			
AM00824.400	Clear • Length: 24" (610 mm) for 48" opening	64 lbs (29 kg)	213 Silver	606
AM00830.400	Clear Length: 30" (762 mm) for 60" opening 	80 lbs (36 kg)	213 Silver	808

American Standard

Semi-Frameless Doors

Semi-Frameless Shower Door with Panel	DESCRIPTION	NET WEIGHT	COLOR/FINISH	LIST PRICE
Semi-Frameless Swing Door With Panel	 Semi-frameless swing door and panel 1/4" (6 mm) safety tempered glass 6" (152 mm) through-the-glass C-pull handle Minimum 1-1/2" (38 mm) threshold width required Clear drip system keeps the water inside shower Door swings out only Easy-to-clean glass coating helps prevent water spots and film 			
	Overall Height: 76" (1930 mm)			
AM00817.400	Clear • Fits opening: 44-1/16" – 48" (1119 – 1219 mm)		213 Silver 006 Brushed Nickel	1,550 2,016
AM00816.400	Clear • Fits opening: 56-1/16" – 60" (1424 – 1524 mm)		213 Silver 006 Brushed Nickel	1,702 2,212
Semi-Frameless Swing Door	 Semi-frameless swing door 1/4" (6 mm) safety tempered glass 6" (152 mm) through-the-glass C-pull handle Minimum 2" (51 mm) threshold width required Reversible for left to right installation Door swings out only Easy-to-clean glass coating helps prevent water spots and film 			
	Overall Height: 76" (1930 mm)			
AM00819.400	Clear • Fits opening: 35-1/16" – 36" (891 – 914 mm)		213 Silver 006 Brushed Nickel	1,102 1,432

Tub and Shower Doors

American Standard

Semi-Frameless Doors

Semi-Frameless Tub Doors	DESCRIPTION	NET WEIGHT	COLOR/FINISH	LIST PRICE
Euro Semi-Frameless Sliding Tub Doors	 Semi-frameless European-designed doors 1/4" (6 mm) safety tempered glass Minimum 1-1/2" (38 mm) threshold width required Easy-to-clean open bottom track Heavy duty rounded header Towel bars pass through glass Simple out-of-square adjustment Smooth glide rollers 			
	Overall Height: 57" (1448 mm)			
AM00350.400	Clear • Fits opening: 54-1/2" – 58-1/2" (1384 – 1486 mm) • Towel bar: 22" (559 mm)	85 lbs (39 kg)	213 Silver 224 ORB 006 Brushed Nickel	815 1,099 1,099
AM00350.422	Rain • Fits opening: 54-1/2" – 58-1/2" (1384 – 1486 mm) • Towel bar: 22" (559 mm)	85 lbs (39 kg)	213 Silver 224 ORB 006 Brushed Nickel	1,000 1,230 1,230

Easy-to-Clean Glass Finish: Add suffix "C" at the end of any base model number to get the Easy-to-Clean glass finish for a list price upcharge of \$25 for one door panel and \$50 for two or more door panels. AM00350C.400.213

ORB (Oil Rubbed Bronze)

Custom glass is ordered upon receipt of your purchase order. Cancellations can not be accepted 24 hours after receipt of order.

American Standard

Semi-Frameless Shower Doors	DESCRIPTION	NET WEIGHT	COLOR/FINISH	LIST PRICE
Euro Semi-Frameless Sliding Shower Doors	 Semi-frameless European-designed doors 1/4" (6 mm) safety tempered glass Minimum 1-1/2" (38 mm) threshold width required Easy-to-clean open bottom track Heavy duty rounded header Tubular bars pass through glass Simple out-of-square adjustment Smooth glide rollers 			
	Overall Height: 70" (1778 mm)			
AM00330.400	Clear • Fits opening: 40-1/16" – 44" (1018 – 1118 mm) • Towel bar: 15" (381 mm)	80 lbs (36 kg)	213 Silver 224 ORB 006 Brushed Nickel	967 1,187 1,187
AM00370.400	Clear • Fits opening: 43" – 47" (1092 – 1194 mm) • Towel bar: 16-1/2" (419 mm)	84 lbs (38 kg)	213 Silver 224 ORB 006 Brushed Nickel	895 1,112 1,112
AM00370.422	Rain • Fits opening: 43" – 47" (1092 – 1194 mm) • Towel bar: 16-1/2" (419 mm)	84 lbs (38 kg)	213 Silver 224 ORB 006 Brushed Nickel	1,037 1,271 1,271
AM00390.400	Clear • Fits opening: 54-1/2" – 58-1/2" (1384 – 1486 mm) • Towel bar: 22" (559 mm)	84 lbs (38 kg)	213 Silver 224 ORB 006 Brushed Nickel	1,128 1,465 1,465
AM00390.422	Rain Fits opening: 54-1/2" – 58-1/2" (1384 – 1486 mm) Towel bar: 22" (559 mm) 	80 lbs (36 kg)	213 Silver 224 ORB 006 Brushed Nickel	1,309 1,687 1,687

Easy-to-Clean Glass Finish: Add suffix "C" at the end of any base model number to get the Easy-to-Clean glass finishORB (Oil Rubbed Bronze)for a list price upcharge of \$25 for one door panel and \$50 for two or more door panels. AM00350C.400.213ORB (Oil Rubbed Bronze)

Tub and Shower Doors

Semi-Frameless Doors

Semi-Frameless Shower Doors	DESCRIPTION	NET WEIGHT	COLOR/FINISH	LIST PRICE
Euro Semi-Frameless Sliding Shower Doors	 Semi-frameless European-designed doors 1/4" (6 mm) safety tempered glass Minimum 1-1/2" (38 mm) threshold width required Easy-to-clean open bottom track Heavy duty rounded header Tubular bars pass through glass Simple out-of-square adjustment Smooth glide rollers 			
	Overall Height: 65-1/2" (1664 mm)			
AM00335.400	Clear • Fits opening: 40-1/16" – 44" (1018 – 1118 mm) • Towel bar: 15" (381 mm)	84 lbs (38 kg)	213 Silver 224 ORB 006 Brushed Nickel	837 1,152 1,152
AM00345.400	Clear • Fits opening: 43" – 47" (1092 – 1194 mm) • Towel bar: 16-1/2" (419 mm)	84 lbs (38 kg)	213 Silver 224 ORB 006 Brushed Nickel	1,059 1,315 1,315
AM00394.400	Clear • Fits opening: 54-1/2" – 58-1/2" (1384 – 1486 mm) • Towel bar: 22" (559 mm)	84 lbs (38 kg)	213 Silver 224 ORB 006 Brushed Nickel	1,133 1,354 1,354

Easy-to-Clean Glass Finish: Add suffix "C" at the end of any base model number to get the Easy-to-Clean glass finish for a list price upcharge of \$25 for one door panel and \$50 for two or more door panels. AM00350C.400.213

ORB (Oil Rubbed Bronze)

Tub and Shower Doors

Framed Doors

 3/16" (5 mm) safety tempered glass Minimum 1-1/2" (38 mm) threshold width required Easy-to-clean bottom track system 	*	0	4
 Simple out-of-square adjustment Two bracketed towel bars 			
Overall Height: 58-1/2" (1486 mm)			1 of the state
Clear • Fits opening: 57" – 59" (1448 – 1499 mm)	58 lbs (26 kg)	213 Silver 224 ORB 006 Brushed Nickel	662 879 879
Rain • Fits opening: 57" – 59" (1448 – 1499 mm)	58 lbs (26 kg)	213 Silver 224 ORB 006 Brushed Nickel	662 922 922
Hammered • Fits opening: 57" – 59" (1448 – 1499 mm)	58 lbs (26 kg)	213 Silver 224 ORB 006 Brushed Nickel	662 922 922
Overall Height: 56" (1422 mm)			<u> </u>
Hammered • Fits opening: 57" – 59" (1448 – 1499 mm)	58 lbs (26 kg)	213 Silver 224 ORB 006 Brushed Nickel	661 879 879
	Clear • Fits opening: 57" – 59" (1448 – 1499 mm) Rain • Fits opening: 57" – 59" (1448 – 1499 mm) Hammered • Fits opening: 57" – 59" (1448 – 1499 mm) Overall Height: 56" (1422 mm) Hammered	Clear 58 lbs • Fits opening: 57" – 59" (1448 – 1499 mm) 58 lbs (26 kg) 58 lbs • Fits opening: 57" – 59" (1448 – 1499 mm) 58 lbs • Fits opening: 57" – 59" (1448 – 1499 mm) 58 lbs • Fits opening: 57" – 59" (1448 – 1499 mm) 58 lbs • Fits opening: 57" – 59" (1448 – 1499 mm) 58 lbs • Fits opening: 57" – 59" (1448 – 1499 mm) 58 lbs • Fits opening: 57" – 59" (1448 – 1499 mm) 58 lbs • Fits opening: 57" – 59" (1448 – 1499 mm) 58 lbs • Fits opening: 57" – 59" (1448 – 1499 mm) 58 lbs	Clear 58 lbs 213 Silver • Fits opening: 57" – 59" (1448 – 1499 mm) 58 lbs 224 ORB 006 Brushed Nickel 006 Brushed Nickel Rain 58 lbs 213 Silver • Fits opening: 57" – 59" (1448 – 1499 mm) 58 lbs 213 Silver 1 58 lbs 213 Silver 224 ORB 006 Brushed Nickel Hammered 58 lbs 213 Silver • Fits opening: 57" – 59" (1448 – 1499 mm) 58 lbs 213 Silver 006 Brushed Nickel 006 Brushed Nickel 006 Brushed Nickel Overall Height: 56" (1422 mm) 58 lbs 213 Silver • Fits opening: 57" – 59" (1448 – 1499 mm) 58 lbs 213 Silver 224 ORB 006 Brushed Nickel 006 Brushed Nickel

Easy-to-Clean Glass Finish: Add suffix "C" at the end of any base model number to get the Easy-to-Clean glass finish for a list price upcharge of \$25 for one door panel and \$50 for two or more door panels. AM00350C.400.213

ORB (Oil Rubbed Bronze)

Tub and Shower Doors

Framed Doors

Framed Shower Doors	DESCRIPTION	NET WEIGHT	COLOR/FINISH	LIST PRICE
Prestige Framed Sliding Shower Doors	 3/16" (5 mm) safety tempered glass Minimum 1-1/2" (38 mm) threshold width required Easy-to-clean bottom track system Simple out-of-square adjustment Two bracketed towel bars 			
	Overall Height: 68" (1727 mm)			
AM00735.400	Clear • Fits Opening: 40-1/16" – 42" (1018 – 1067 mm)	53 lbs (24 kg)	213 Silver 224 ORB 006 Brushed Nickel	672 892 892
AM00735.422	Rain • Fits Opening: 40-1/16" – 42" (1018 – 1067 mm)	53 lbs (24 kg)	213 Silver 224 ORB 006 Brushed Nickel	672 892 892
AM00735.436	Hammered • Fits Opening: 40-1/16" – 42" (1018 – 1067 mm)	53 lbs (24 kg)	213 Silver 224 ORB 006 Brushed Nickel	672 892 892
AM00745.400	Clear • Fits Opening: 43-3/4" – 45-3/4" (1111 – 1162 mm)	53 lbs (24 kg)	213 Silver 224 ORB 006 Brushed Nickel	645 936 936
AM00745.422	Rain • Fits Opening: 43-3/4" – 45-3/4" (1111 – 1162 mm)	53 lbs (24 kg)	213 Silver 224 ORB 006 Brushed Nickel	645 936 936
AM00745.436	Hammered • Fits Opening: 43-3/4" – 45-3/4" (1111 – 1162 mm)	53 lbs (24 kg)	213 Silver 224 ORB 006 Brushed Nickel	645 936 936

Easy-to-Clean Glass Finish: Add suffix "C" at the end of any base model number to get the Easy-to-Clean glass finish for a list price upcharge of \$25 for one door panel and \$50 for two or more door panels. AM00350C.400.213

ORB (Oil Rubbed Bronze)

American Standard

Framed Shower Doors	DESCRIPTION	NET WEIGHT	COLOR/FINISH	LIST Price
restige Framed Sliding hower Doors	 3/16" (5 mm) safety tempered glass Minimum 1-1/2" (38 mm) threshold width required Easy-to-clean bottom track system Simple out-of-square adjustment Two bracketed towel bars 			
	Overall Height: 68" (1727 mm)			
AM00775.400	 Clear Fits Opening: 45" – 47" (1143 – 1194 mm) 	54 lbs (25 kg)	213 Silver 224 ORB 006 Brushed Nickel	645 936 936
AM00775.422	 Rain Fits Opening: 45" – 47" (1143 – 1194 mm) 	54 lbs (25 kg)	213 Silver 224 ORB 006 Brushed Nickel	645 936 936
AM00775.436	 Hammered Fits Opening: 45" – 47" (1143 – 1194 mm) 	54 lbs (25 kg)	213 Silver 224 ORB 006 Brushed Nickel	645 936 936
AM00729.400	 Clear Fits Opening: 52-1/16" – 54" (1322 – 1372 mm) 	59 lbs (27 kg)	213 Silver 224 ORB 006 Brushed Nickel	727 1,000 1,000
AM00729.422	 Rain Fits Opening: 52-1/16" – 54" (1322 – 1372 mm) 	59 lbs (27 kg)	213 Silver 224 ORB 006 Brushed Nickel	727 1,000 1,000
AM00729.436	 Hammered Fits Opening: 52-1/16" – 54" (1322 – 1372 mm) 	59 lbs (27 kg)	213 Silver 224 ORB 006 Brushed Nickel	727 1,000 1,000
AM00795.400	 Clear Fits Opening: 57" – 59" (1448 – 1524 mm) 	60 lbs (27 kg)	213 Silver 224 ORB 006 Brushed Nickel	828 1,064 1,064

Easy-to-Clean Glass Finish: Add suffix "C" at the end of any base model number to get the Easy-to-Clean glass finish for a list price upcharge of \$25 for one door panel and \$50 for two or more door panels. AM00350C.400.213

ORB (Oil Rubbed Bronze)

American Standard

Tub and Shower Doors

Framed Doors

Framed Shower Doors	DESCRIPTION	NET WEIGHT	COLOR/FINISH	LIST PRICE
Prestige Framed Sliding Shower Doors	 3/16" (5 mm) safety tempered glass Minimum 1-1/2" (38 mm) threshold width required Easy-to-clean bottom track system Simple out-of-square adjustment Two bracketed towel bars 			
	Overall Height: 71-1/2" (1816 mm)			
AM00730.400	Clear • Fits Opening: 40-1/16" – 42" (1018 – 1067 mm)	56 lbs (25 kg)	213 Silver 224 ORB 006 Brushed Nickel	662 879 879
AM00730.422	Rain • Fits Opening: 40-1/16" – 42" (1018 – 1067 mm)	56 lbs (25 kg)	213 Silver 224 ORB 006 Brushed Nickel	662 879 879
AM00730.436	Hammered • Fits Opening: 40-1/16" – 42" (1018 – 1067 mm)	56 lbs (25 kg)	213 Silver 224 ORB 006 Brushed Nickel	662 879 879
AM00770.400	Clear • Fits Opening: 45" – 47" (1143 – 1194 mm)	57 lbs (26 kg)	213 Silver 224 ORB 006 Brushed Nickel	738 936 936
AM00770.422	Rain • Fits Opening: 45" – 47" (1143 – 1194 mm)	57 lbs (26 kg)	213 Silver 224 ORB 006 Brushed Nickel	738 936 936
AM00770.436	Hammered • Fits Opening: 45" – 47" (1143 – 1194 mm)	57 lbs (26 kg)	213 Silver 224 ORB 006 Brushed Nickel	738 936 936
AM00790.400	Clear • Fits Opening: 57" – 59" (1448 – 1498 mm)	66 lbs (30 kg)	213 Silver 224 ORB 006 Brushed Nickel	814 993 993
AM00790.436	Hammered • Fits Opening: 57" – 59" (1448 – 1499 mm)	66 lbs (30 kg)	213 Silver 224 ORB 006 Brushed Nickel	814 993 993

Easy-to-Clean Glass Finish: Add suffix "C" at the end of any base model number to get the Easy-to-Clean glass finish for a list price upcharge of \$25 for one door panel and \$50 for two or more door panels. AM00350C.400.213

ORB (Oil Rubbed Bronze)

Custom glass is ordered upon receipt of your purchase order. Cancellations can not be accepted 24 hours after receipt of order.

American Standard

Tub and Shower Doors

Framed Doors

Framed Shower Doors	DESCRIPTION	NET WEIGHT	COLOR/FINISH	LIST PRICE
Prestige Framed Swing Shower Doors	 3/16" (5 mm) safety tempered glass Swing pivot door Minimum 2" (51 mm) threshold width required Full-length magnetic closure Universal left and right door swing Simple out-of-square adjustment 			
	Overall height: 63-1/2" (1613 mm)			
AM00801.400	Clear • Fits Opening: 23-3/8" – 24-3/8" (594 – 619 mm)	34 lbs (15 kg)	213 Silver	444
AM00801.422	Rain • Fits Opening: 23-3/8" – 24-3/8" (594 – 619 mm)	34 lbs (15 kg)	213 Silver	444
AM00801.436	Hammered • Fits Opening: 23-3/8" – 24-3/8" (594 – 619 mm)	34 lbs (15 kg)	213 Silver	444
AM00802.400	Clear • Fits Opening: 27-3/8" – 28-3/8" (695 – 721 mm)	37 lbs (17 kg)	213 Silver	451
AM00802.422	Rain • Fits Opening: 27-3/8" – 28-3/8" (695 – 721 mm)	37 lbs (17 kg)	213 Silver	451
AM00802.436	Hammered • Fits Opening: 27-3/8" – 28-3/8" (695 – 721 mm)	37 lbs (17 kg)	213 Silver	451
AM00806.400	Clear • Fits Opening: 31-1/8" – 32-1/8" (791 – 816 mm)	43 lbs (20 kg)	213 Silver	462
AM00806.422	Rain • Fits Opening: 31-1/8" – 32-1/8" (791 – 816 mm)	40 lbs (18 kg)	213 Silver	462
AM00806.436	Hammered • Fits Opening: 31-1/8" – 32-1/8" (791 – 816 mm)	43 lbs (20 kg)	213 Silver	462

Easy-to-Clean Glass Finish: Add suffix "C" at the end of any base model number to get the Easy-to-Clean glass finish for a list price upcharge of \$25 for one door panel and \$50 for two or more door panels. AM00350C.400.213

ORB (Oil Rubbed Bronze)

Custom glass is ordered upon receipt of your purchase order. Cancellations can not be accepted 24 hours after receipt of order.



Tub and Shower Doors

Framed Doors

Framed Tub and Shower Doors	DESCRIPTION	NET WEIGHT	COLOR/FINISH	LIST PRICE
Prestige Neo-Angle Shower Doors	 3/16" (5 mm) safety tempered glass No cutting required Door can swing left or right Full-length magnetic closure 			
	Overall Height: 68-5/8" (1743 mm)			
AMOPQF2.400	Clear • Centerline: 16-11/16" x 24-1/8" x 16-11/16" (423 x 613 x 423 mm)	80 lbs (36 kg)	213 Silver 224 ORB 006 Brushed Nickel	1,033 1,338 1,338
AMOPQF2.436	Hammered • Centerline: 16-11/16" x 24-1/8" x 16-11/16" (423 x 613 x 423 mm)	80 lbs (36 kg)	213 Silver 224 ORB 006 Brushed Nickel	1,005 1,397 1,397
AMPQF14.400	Clear • Centerline: 17-1/2" x 24-3/8" x 17-1/2" (445 x 619 x 445 mm)	80 lbs (36 kg)	213 Silver 224 ORB 006 Brushed Nickel	1,033 1,338 1,338
AMPQF14.436	Hammered • Centerline: 17-1/2" x 24-3/8" x 17-1/2" (445 x 619 x 445 mm)	80 lbs (36 kg)	213 Silver 224 ORB 006 Brushed Nickel	1,005 1,397 1,397
AMOPQF1.400	Clear • Centerline: 18-7/16" x 24-1/4" x 18-7/16" (468 x 616 x 468 mm)	80 lbs (36 kg)	213 Silver 224 ORB 006 Brushed Nickel	1,033 1,338 1,338
AMOPQF1.436	Hammered • Centerline: 18-7/16" x 24-1/4" x 18-7/16" (468 x 616 x 468 mm)	80 lbs (36 kg)	213 Silver 224 ORB 006 Brushed Nickel	1,005 1,397 1,397
AMPQF16.400	Clear • Centerline: 22-13/16" x 24-1/4" x 22-13/16" (579 x 616 x 579 mm)	80 lbs (36 kg)	213 Silver 224 ORB 006 Brushed Nickel	1,033 1,338 1,338
AMPQF16.422	Rain • Centerline: 22-13/16" x 24-1/4" x 22-13/16" (579 x 616 x 579 mm)	80 lbs (36 kg)	213 Silver 224 ORB 006 Brushed Nickel	1,271 1,594 1,594

Easy-to-Clean Glass Finish: Add suffix "C" at the end of any base model number to get the Easy-to-Clean glass finish for a list price upcharge of \$25 for one door panel and \$50 for two or more door panels. AM00350C.400.213

ORB (Oil Rubbed Bronze)

Custom glass is ordered upon receipt of your purchase order. Cancellations can not be accepted 24 hours after receipt of order.

Tub and Shower Doors

Shower and Tub Enclosure/Bathing Fixture – Cross Reference

Dimensions	Model	Description		iro ameless	Prestige	Framed
Tubs			Tub [Doors	Tub I	Doors
	2770, 2771, 2772, 2776	Cadet®				
-	2461	Cambridge®				
	2425, 2422, 2771V	Evolution®	-			
	3571, 3574	Green Tea®				
	0255	New Salem®				0750
5'	0263	New Solar®	AMO	0350		0758
	2391, 2390, 2393, 2392, 2395, 2394, 2397, 2396	Princeton®				
	2946, 2545, 2973	Studio®				
	2748	Town Square®				
	2544, 2545	Town Square S		1		
Solid Surface Shower E	Bases		Semi-Frameless Sliding	Semi-Frameless Swing with Panel	Semi-Frameless Top Roller	Framed Sliding
18" x 36" x 2" 1219 x 914 x 51 mm)	4836SMCOL	Townsend Single Threshold	AM00345 AM00370	AM00817	AM00821	AM00775 AM00770
60" x 30" x 2" 1524 x 762 x 51 mm)	6030SMRHOL 6030SMLHOL	Townsend Single Threshold				
60" x 32" x 2" 1524 x 813 x 51 mm)	6032SMRHOL 6032SMLHOL	Townsend Single Threshold	AM00390 AM00394	AM00816	AM00822	AM00790 AM00795
60" x 36" x 2" 1524 x 914 x 51 mm)	6036SMRHOL 6036SMLHOL	Townsend Single Threshold				
Acrylic Shower Bases			Semi-Frameless Sliding	Semi-Frameless Swing with Panel	Frameless Top Rolling	Framed Sliding
48" x 36" x 2-1/2" 1219 x 914 x 64 mm)	A8004L-CO	Studio Single Threshold	AM00345	1100017		AM00775
18-1/8" x 34-1/4" x 6-5/8 1219 x 870 x 168 mm)	8" 4834.ST	Single Threshold	AM00370	AM00817	AM00821	AM00770
60" x 30" x 2-1/2" 1524 x 762 x 64 mm)	A8001L-RHO A8001L-LHO	Studio Single Threshold				
60" x 31-1/4" x 5" 1524 x 794 x 127 mm)	2946.STR 2946.STL	Studio Single Threshold				
0" x 32" x 2-1/2" 1524 x 813 x 64 mm)	A8002L-RHO A8002L-LHO	Studio Single Threshold	AM00390 AM00394	AM00816	AM00822	AM00790 AM00795
0" x 36" x 2-1/2" 1524 x 914 x 64 mm)	A8003L-RHO A8003L-LHO	Studio Single Threshold				
0-1/8" x 34-1/8" x 6-5/8 1527 x 867 x 168 mm)	8" 6034.ST	Single Threshold	-			

Please take the height of alcove walls into consideration when choosing doors. Doors are adjustable to fit installations both with and without alcove walls.



Solid Surface Shower Bases

Solid Surface Shower Bases	DESCRIPTION	NET WEIGHT	COLOR/FINISH	LIST PRICE
Fownsend® Single Threshold Shower Bases	 Durable 100% solid, non-porous material Clean, contemporary, single threshold design Made of high-quality Aluminum Trihydrate (ATH) with highly resistant resin Integral 3-sided tiling/water retention flange Smooth matte surface Repairable and renewable surface – chips and scratches can be sanded out Self-extinguishing – tested against ASTM E84 Fungi and bacterial resistant UV-resistant – maintains its color Resistant to stains and impact Easy maintenance and cleaning Removable, color-matched, solid surface trench drain cover included Drain not included 5-year warranty 			
	60" x 36" Solid Surface Shower Bases			
	Nominal Dimensions: • 60" x 36" x 2" (1524 x 914 x 51 mm)			
6036SMRHOL	Shower base with right-hand outlet	118 lbs (53.7 kg)	218 Soft White	1,106
6036SMLHOL	Shower base with left-hand outlet	118 lbs (53.7 kg)	218 Soft White	1,106
	Optional Replacement Drain Cover:		1	
⊳ 755431-401.2180A	60" x 36" Rectangle solid surface drain cover	5.51 lbs (2.50 kg)	218 Soft White	226
	60" x 32" Solid Surface Shower Bases		I	
	Nominal Dimensions: • 60" x 32" x 2" (1524 x 813 x 51 mm)			
6032SMRHOL	Shower base with right-hand outlet	106 lbs (48.3 kg)	218 Soft White	995
6032SMLHOL	Shower base with left-hand outlet	106 lbs (48.3 kg)	218 Soft White	995
	Optional Replacement Drain Cover:	1		
⊳ 755429-401.2180A	60" x 32" Rectangle solid surface drain cover	4.85 lbs (2.20 kg)	218 Soft White	219
	60" x 30" Solid Surface Shower Bases		1	1
	Nominal Dimensions: • 60" x 30" x 2" (1524 x 762 x 51 mm)			
6030SMRHOL	Shower base with right-hand outlet	100 lbs (45.6 kg)	218 Soft White	985
6030SMLHOL	Shower base with left-hand outlet	100 lbs (45.6 kg)	218 Soft White	985
	Optional Replacement Drain Cover:			
⊳ 755427-401.2180A	60" x 30" Rectangle solid surface drain cover	4.62 lbs (2.10 kg)	218 Soft White	219
	Optional Shower Doors:			
AM00790 AM00795	Prestige Framed Sliding Shower Doors	See pages 142-143.		
AM00390 AM00394	Euro Semi-Frameless Sliding Shower Doors	See	pages 138-139.	
AM00816	Semi-Frameless Swing Door and Panel	Se	ee page 136.	
AM00822	Semi-Frameless Top Roller Sliding Doors	See page 134.		

Shower Bases

 \triangleright Parts Program (Non-Premier)

American Standard

Solid Surface Shower Bases

Solid Surface Shower Bases	DESCRIPTION	NET WEIGHT	COLOR/FINISH	LIST PRICE
Townsend® Single Threshold Shower Base 48" x 36"	 Durable 100% solid, non-porous material Clean, contemporary, single threshold design Made of high-quality Aluminum Trihydrate (ATH) with highly resistant resin Integral 3-sided tiling/water retention flange Smooth matte surface Repairable and renewable surface – chips and scratches can be sanded out Self-extinguishing – tested against ASTM E84 Fungi and bacterial resistant UV-resistant – maintains its color Resistant to stains and impact Easy maintenance and cleaning Removable, color-matched, solid surface trench drain cover included 5-year warranty Nominal Dimensions: 48" x 36" x 2" (1219 x 914 x 51 mm) 			
4836SMCOL	Shower base with center outlet	96.6 lbs (43.9 kg)	218 Soft White	944
	Optional Replacement Drain Cover:			
⊳ 755433-401.2180A	$48"\ x\ 36"$ and $60"\ x\ 30"$ square solid surface drain cover	0.99 lbs (0.45 kg)	218 Soft White	95
	Optional Shower Doors:			
AM00775 AM00770	Prestige Framed Sliding Shower Doors	See pages 142-143.		
AM00345 AM00370	Euro Semi-Frameless Sliding Shower Doors	See pages 138-139.		
AM00817	Semi-Frameless Swing Door and Panel	See page 136.		
AM00821	Semi-Frameless Top Roller Sliding Doors	See page 134.		

▷ Parts Program (Non-Premier)

148 List Price Guide 2020

American Standard

Solid Surface Shower Bases

Solid Surface Shower Bases	DESCRIPTION	NET WEIGHT	COLOR/FINISH	LIST PRIC	
Townsend® ADA Shower Bases	 ADA compliant design Durable 100% solid, non-porous material Clean, contemporary, single threshold design Made of high-quality Aluminum Trihydrate (ATH) with highly resistant resin Integral 3-sided tiling/water retention flange Smooth matte surface Repairable and renewable surface – chips and scratches can be sanded out Self-extinguishing – tested against ASTM E84 Fungi and bacterial resistant UV-resistant – maintains its color Resistant to stains and impact Easy maintenance and cleaning Barrier free access Removable, brushed stainless steel trench drain cover included Drain not included 5-year warranty 				
	ADA				
	64" x 34" ADA (60" x 30" clear) Solid Surface Show	ver Base			
	Nominal Dimensions: • 64" x 34" x 1-1/8" (1626 x 864 x 29 mm)				
6434AMFCOL	Shower base with front center outlet	124 lbs (56.2 kg)	218 Soft White	1,303	
	Optional Replacement Drain Cover:	11			
⊳755440-400.0730A	64" x 34" Stainless steel drain cover	7.38 lbs (3.35 kg)	073 Brushed Stainless	146	
	38" x 38" ADA (36" x 36" clear) Solid Surface Shower Base				
	Nominal Dimensions: • 38" x 38" x 1-1/8" (203 x 203 x 29 mm)				
3838AMFCOL	Shower base with front center outlet	87 lbs (39.7 kg)	218 Soft White	990	
	Optional Replacement Drain Cover:	I			
⊳ 755446-400.0730A	38" x 38" Stainless steel drain cover		073 Brushed Stainless	146	

 \triangleright Parts Program (Non-Premier)



Acrylic Shower Bases

Acrylic Shower Bases	DESCRIPTION	NET WEIGHT	COLOR/FINISH	LIST PRIC	
tudio® ingle Threshold hower Bases	 Clean contemporary design Durable acrylic with fiberglass reinforcement Integral 3-sided tiling/water retention flange Single threshold Easy to step over 2-1/2" (64 mm) threshold height Brushed stainless steel drain cover included Drain not included Limited Lifetime Warranty 				
	60" x 36" Acrylic Shower Bases				
	Nominal Dimensions: • 60" x 36" x 2-1/2" (1524 x 914 x 64 mm)				
A8003L-RH0	Shower base with right-hand outlet	55.8 lbs (25.4 kg)	020 White	758	
A8003L-LH0	Shower base with left-hand outlet	55.8 lbs (25.4 kg)	020 White	758	
	60" x 32" Acrylic Shower Bases				
	Nominal Dimensions: • 60" x 32" x 2-1/2" (1524 x 813 x 64 mm)				
A8002L-RH0	Shower base with right-hand outlet	49.9 lbs (22.7 kg)	020 White	692	
A8002L-LH0	Shower base with left-hand outlet	49.9 lbs (22.7 kg)	020 White	692	
	60" x 30" Acrylic Shower Bases				
	Nominal Dimensions: • 60" x 30" x 2-1/2" (1524 x 762 x 64 mm)				
A8001L-RH0	Shower base with right-hand outlet	41.3 lbs (18.8 kg)	020 White	682	
A8001L-LH0	Shower base with left-hand outlet	41.3 lbs (18.8 kg)	020 White	682	
	Optional Replacement Drain Cover:				
⊳ 755453-400.0730A	Stainless steel drain plate	2.0 lbs (0.91 kg)	073 Brushed Stainless	149	
	Separate Components:				
AM00790 AM00795	Prestige Framed Sliding Shower Doors	See pages 142-143.			
AM00390 AM00394	Euro Semi-Frameless Sliding Shower Doors	See pages 138-139.			
AM00816	Semi-Frameless Swing Door and Panel		See page 136.		
AM00822	Semi-Frameless Top Roller Sliding Doors		See page 134.		

▷ Parts Program (Non-Premier)

American Standard

Acrylic Shower Bases

Acrylic Shower Bases	DESCRIPTION	NET WEIGHT	COLOR/FINISH	LIST PRICE	
Studio® Single Threshold Shower Base 48" x 36"	 Clean contemporary design Durable acrylic with fiberglass reinforcement Integral 3-sided 1" (25 mm) flange Single threshold Easy to step over 2-1/2" (64 mm) threshold height Brushed stainless steel drain cover included Drain not included Limited Lifetime Warranty Nominal Dimensions: 48" x 36" x 2-1/2" (1219 x 914 x 64 mm) 				
A8004L-CO	Shower base with center outlet	39.8 lbs (18.1 kg)	020 White	657	
	Optional Replacement Drain Cover:				
⊳ 755453-400.0730A	Stainless steel drain plate	2.0 lbs (0.91 kg)	073 Brushed Stainless	149	
	Separate Components:				
AM00775 AM00770	Prestige Framed Sliding Shower Doors	See pages 142-143.			
AM00345 AM00370	Euro Semi-Frameless Sliding Shower Doors	See pages 138-139.			
AM00817	Semi-Frameless Swing Door and Panel	See page 136.			
AM00821	Semi-Frameless Top Roller Sliding Doors	See page 134.			

Shower Bases

▷ Parts Program (Non-Premier)

American Standard

Acrylic Shower Bases

Acrylic Shower Bases	DESCRIPTION	NET WEIGHT	COLOR/FINISH	LIST Price	
Studio® ADA Shower Bases	 ADA compliant design Clean contemporary design Durable acrylic with fiberglass reinforcement Integral 3-sided 1" (25 mm) flange Single threshold Barrier free access Brushed stainless steel drain cover included Drain not included Limited Lifetime Warranty 				
	ADA				
	64" x 34" ADA (60" x 30" clear) Acrylic Shower Ba	ase			
	Nominal Dimensions: • 64" x 34" x 1-1/8" (1626 x 864 x 29 mm)				
A8007D-FC0	Shower base with center outlet	36 lbs (16.4 kg)	020 White	783	
	38" x 38" ADA (36" x 36" clear) Acrylic Shower Base				
	Nominal Dimensions: • 38" x 38" x 1-1/8" (203 x 203 x 29 mm)				
A8009D-FC0	Shower base with center outlet	24.8 lbs (11.3 kg)	020 White	662	
	Optional Replacement Drain Cover:	11			
⊳ 755453-400.0730A	Stainless steel drain plate	2.0 lbs (0.91 kg)	073 Brushed Stainless	149	

▷ Parts Program (Non-Premier)

American Standard

Acrylic Shower Bases

Acrylic Shower Bases and Wall Set	DESCRIPTION	NET WEIGHT	COLORS	LIST PRICE
Studio® Shower Bases 60" x 32"	 High-gloss acrylic with fiberglass reinforcement Single threshold unit Textured shower floor helps increase bathroom safety Integral three-sided, one inch tiling/water retention flange Low step-over height for easy access Shower drain with stainless steel drain plate included Limited Lifetime warranty Nominal Dimensions: 60" x 31-1/4" x 5" (1524 x 794 x 127 mm) 			
2946.STR	Shower base with right-hand outlet	61.2 lbs (27.8 kg)	011 Arctic	731
2946.STL	Shower base with left-hand outlet	61.2 lbs (27.8 kg)	011 Arctic	731
	Optional Shower Doors:			
AM00790 AM00795	Prestige Framed Sliding Shower Doors		See pages 142-143	
AM00390 AM00394	Euro Semi-Frameless Sliding Shower Doors	See pages 138-139.		
AM00816	Semi-Frameless Swing Door and Panel	See page 136. See page 134.		
AM00822	Semi-Frameless Top Roller Sliding Doors			
Studio Shower Wall Set 60" x 32"	 High-impact polystyrene Center wall area free of shelving to provide easier movement Mounts directly to studs – no backer board needed 3/4" (19 mm) integral tile flange Tongue and groove inter-locking for alignment and to prevent water seepage Six integrated extra deep 4-1/2" (114 mm) shelves Includes two side walls and one back wall Limited Lifetime warranty Nominal Dimensions: Side Panel 72" tall x 32" wide (1829 x 813 mm) Back Panel 72" tall x 60" wide (1829 x 1524 mm) 			
2946.SW	Shower Wall Set	31.1 lbs (14 kg)	011 Arctic	979



Acrylic Shower Bases

Acrylic Shower Bases	DESCRIPTION	NET WEIGHT	COLOR/FINISH	LIST PRICE
Single Threshold Shower Base	 Acrylic with fiberglass reinforcement Textured floor Integral water retention and tiling flange Water dam at front threshold Shower drain with stainless steel drain plate included 			
6034.ST	Nominal Dimensions: • 60-1/8" x 34-1/8" x 6-5/8" (1527 x 867 x 168 mm)	103 lbs (48 kg)	020 White	1,009
4834.ST	Nominal Dimensions: • 48-1/8" x 34-1/4" x 6-5/8" (1222 x 870 x 168 mm)	79 lbs (36 kg)	020 White	805
	Optional Shower Doors for 6034.ST			
AM00790 AM00795	Prestige Framed Sliding Shower Doors	See pages 142-143. See pages 138-139. See page 138. See page 136. See page 134.		
AM00390 AM00394	Euro Semi-Frameless Sliding Shower Doors			
AM00816	Semi-Frameless Swing Door and Panel			
AM00822	Semi-Frameless Top Roller Sliding Doors			
	Optional Shower Doors for 4834.ST	·		
AM00775 AM00770	Prestige Framed Sliding Shower Doors	See pages 142-143.		
AM00345 AM00370	Euro Semi-Frameless Sliding Shower Doors	See pages 138-139.		
AM00817	Semi-Frameless Swing Door and Panel	See page 136.		
AM00821	Semi-Frameless Top Roller Sliding Doors		See page 134.	

154 List Price Guide 2020

American Standard

Bathroom Furniture

Crafted with care to complement today's most beautiful bathrooms, the **American Standard Collection** ensures lasting durability and design excellence. Whether open for a spacious look or enclosed for concealed storage, you'll find the perfect piece on the following pages.



American Standard

Furniture – Timeless Beauty for the Bath

Masterfully constructed from poplar solids and birch veneers. Furniture specifically designed for coordinating sinks and countertops.



American Standard® Furniture for Townsend® (Uses any of the three Townsend sinks)



Edgemere®ConsoleRetrospect®ConsoleStudio® 22" VanityImage: ConsoleImage: Console

All American Standard furniture is fully CARB compliant.

Bathroom Furniture

156

American Standard

Town Square[®] S

Bathroom Furniture

Bathroom Furniture	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Town Square S Console Table	 Classic-styled metal console table Uses Town Square S collection pedestal tops Console table legs feature traditional styling with integral front and side towel bars Legs available in Polished Chrome or Brushed Nickel Nominal Dimensions: 30" x 22-1/2" x 35" (762 x 571 x 889 mm) Bowl Sizes: 17-1/2" (445 mm) wide 12-1/4" (311 mm) front-to-back 5-1/4" (133 mm) deep 				
l	Separate Components:				
0297004	Pedestal top, faucet holes on 4" (102 mm) centers	41 lbs (18.6 kg)	1.37	020 White	315
0297008	Console table top, faucet holes on 8" (203 mm) centers	41 lbs (18.6 kg)	1.37	020 White 222 Linen	321 402
0297001	Console table top, center hole only	41 lbs (18.6 kg)	1.37	020 White 222 Linen	321 402
8721000	Console table legs	22 lbs (10 kg)	1.25	002 Polished Chrome 295 Brushed Nickel	888 1,066
	Spare Parts:	1		1	
⊳770262-100.0070A	Console mounting kit				12
▷ 770258-200.0070A	Leveling feet: Set of 4				12

▷ Parts Program (Non-Premier)

American Standard

Town Square[®] S

Bathroom Furniture

Bathroom Furniture	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Town Square S Washstand	 Traditional style washstand with glass storage shelf Requires 0298 based vanity sink and 3829 based towel bar (ordered separately) Coordinates with the Town Square S collection Nominal Dimensions: 31" x 22-1/2" (787 x 571 mm) 35" (889 mm) height 				
9056030	Town Square S Washstand	48 lbs (22 kg)	11.45	020 White 476 Dark Cherry	706 706
	Separate Components:			1	
0298008	 Town Square S Vanity Top Faucet holes on 8" (203 mm) centers 	44 lbs (20 kg)	1.92	020 White 222 Linen	346 432
0298001	Town Square S Vanity Top Center hole only 	44 lbs (20 kg)	1.92	020 White 222 Linen	346 432
Towel Bar for 9056030 (required):				
Town Square S 3829000 Towel Bar	• Towel bar – required	0.81 lbs (0.37 kg)	0.03	002 Polished Chrome 295 Brushed Nickel	101 152
	Spare Parts:	1		1	
⊳ 770259-100.0070A	Towel bar mounting kit				12

▷ Parts Program (Non-Premier)

American Standard

Bathroom Furniture

Portsmouth®

Bathroom Furniture

Bathroom Furniture	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Vanity	 Constructed of poplar solids and birch veneers Matching rattan door insert Slide-out step-up feature Storage area includes one shelf Ideal for families Nominal Dimensions: 30" x 21-1/2" (762 x 546 mm) 		11.46	322 Dark	1,083 1,083

Portsmouth Fireclay Vanity Top	 Fine fireclay vanity top Seamless one-piece design 1" (25 mm) backsplash Includes safety overflow design Nominal Dimensions: 31-1/8" x 22-7/8" x 1-3/4" (791 x 581 x 44 mm) 				
7820.400	Portsmouth Fireclay Vanity Top • Faucet holes on 4" (102 mm) centers	69 lbs (31 kg)	3.82	020 White	290
7820.800	Portsmouth Fireclay Vanity Top • Faucet holes on 8" (203 mm) centers	69 lbs (31 kg)	3.82	020 White	290
	Spare Parts:			1	
⊳770007-0070A	Vanity pull	0.01 lbs (0.01 kg)	0.10		5

See colors on inside front cover.

▷ Parts Program (Non-Premier)

American Standard

Portsmouth®

Bathroom Furniture

Bathroom Furniture		DESCRIPTION	NET WEIGHT	NET	COLORS	LIST PRICE
Portsmouth Washstand	9210.224	 Transitional style washstand Constructed of poplar solids and birch veneers Single drawer with matching rattan drawer insert Coordinates with the Portsmouth collection Nominal Dimensions: 23-3/4" x 19-1/2" (603 mm x 495 mm) 33" (838 mm) height 	48 lbs (22 kg)	5.73	322 Dark Chocolate	928
Vanity Top for 9210.224	:					
Portsmouth China Vanity Top		 Vitreous china top Seamless one-piece design Nominal Dimensions: 24-3/8" x 19-1/2" (619 x 495 mm) 				
	0555.104	Portsmouth China Vanity TopFaucet holes on 4" (102 mm) centers	44 lbs (20 kg)	2.08	020 White 222 Linen	224 282
	0555.108	 Portsmouth China Vanity Top Faucet holes on 8" (203 mm) centers 	44 lbs (20 kg)	2.08	020 White 222 Linen	224 282
	0555.001	Portsmouth China Vanity TopCenter hole only	44 lbs (20 kg)	2.08	020 White 222 Linen	224 282
Portsmouth Mirror	9210.101	 Rectangle mirror with poplar solid frame Coordinates with the Portsmouth collection Nominal Dimensions: 25" x 1-3/4" (635 x 44 mm) 34-3/8" (873 mm) height 	21 lbs (9.5 kg)	1.39	020 White 322 Dark Chocolate	257 257

See colors on inside front cover.

Bathroom Furniture

American Standard

Townsend[®]

Bathroom Furniture

Bathroom Furniture		DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
American Standard® Furniture for Townsend Sinks 30" Vanity		 30" vanity with two drawers Design matched vanity coordinates with Townsend suite fixtures and fittings Choose one of three Townsend sink top types (ordered separately): Townsend pedestal top (page 169) Townsend above counter sink (page 181) Townsend under counter sink (page 190) Requires two drawer pulls (ordered separately) Above counter and under counter sinks require quartz top (ordered separately) Nominal Dimensions: 30" x 19-1/2" x 35-7/8" (762 x 495 x 910 mm) For pedestal top based configurations 30" x 20" x 36-3/8" (762 x 508 x 923 mm) For above counter/quartz top configurations 30" x 20" x 34" (762 x 508 x 863 mm) For under counter/quartz top configurations 				
		Separate Components:	110			
90	036.030	30" vanity with two drawers less drawer pulls	66 lbs (30 kg)	8.33	020 White 475 Smoked Grey	1,081 1,081
77	760.000	Drawer pulls (set of two) – required	1.85 lbs (0.84 kg)	0.02	002 Polished Chrome 295 Brushed Nickel	103 155
78	840.000	Quartz top – required for Townsend above counter sink configurations	31.4 lbs (14.3 kg)	1.66	820 Quartz	566

7840.800



Quartz top with 8" (203 mm) center widespread faucet holes - required for Townsend under counter sink configurations



Spare Parts: ⊳770251-100.0070A

0.03 lbs Drawer pull mounting kit 0.02 (0.01 kg)

37.8 lbs

(17.2 kg)

1.66

820 Quartz

MAP

Þ SR

See colors on inside front cover.

▷ Parts Program (Non-Premier)

American Standard

566

5

Townsend®

Bathroom Furniture

athroom Furniture	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Inerican Standard® irriture for bwnsend Sinks " Washstand	 30" washstand Design matched washstand coordinates with Townsend suite fixtures and fittings Choose one of three Townsend sink top types (ordered separately): Townsend pedestal top (page 169) Townsend above counter sink (page 181) Townsend under counter sink (page 190) Requires towel bar (ordered separately) Above counter and under counter sinks require quartz top (ordered separately) Nominal Dimensions: 30" x 19-1/2" x 35-7/8" (762 x 495 x 910 mm) For pedestal top based configurations 30" x 20" x 36-3/8" (762 x 508 x 923 mm) For above counter/quartz top configurations 30" x 20" x 34" (762 x 508 x 863 mm) For under counter/quartz top configurations 				
	Separate Components:				and build and the
9039.03	0 30" washstand less towel bar	16.2 lbs (7.36 kg)	8.33	020 White 475 Smoked Grey	720 720
3749.00	Towel bar – required	0.81 lbs (0.37 kg)	0.15	002 Polished Chrome 295 Brushed Nickel	103 155
7840.00	 Quartz top – required for Townsend above counter sink configurations 	31.4 lbs (14.3 kg)	1.66	820 Quartz	566
					566
7840.80	Quartz top with 8" (203 mm) center widespread faucet holes – required for Townsend under counter sink configurations	37.8 lbs (17.2 kg)	1.66	820 Quartz	
	faucet holes - required for Townsend under		1.66	820 Quartz	
	faucet holes – required for Townsend under counter sink configurations Spare Parts:		0.02	820 Quartz	5

See colors on inside front cover.

Bathroom Furniture

▷ Parts Program (Non-Premier)

American Standard

Edgemere®

Bathroom Furniture

Bathroom Furniture	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Edgemere® Console Table	 Transitional-styled metal console table Uses Edgemere collection pedestal tops Console table legs feature transitional styling with integral front and side towel bars Lower tempered glass shelf for storage Legs available in Polished Chrome or Brushed Nickel Nominal Dimensions: 25" x 19-1/2" x 35-11/16" (635 x 495 x 906 mm) Bowl Sizes: 17-1/8" (435 mm) wide 12" (305 mm) front-to-back 5-1/4" (133 mm) deep 				
5 5	Separate Components:				
0445.008	Console table top, faucet holes on 8" (203 mm) centers	54 lbs (25 kg)	1.25	020 White	179
0445.004	Console table top, faucet holes on 4" (102 mm) centers	54 lbs (24.5 kg)	1.25	020 White	179
0445.001	Console table top, center hole only	54 lbs (24.5 kg)	1.25	020 White	179
8719.000	Console table legs	22 lbs (10 kg)	1.76	002 Polished Chrome 295 Brushed Nickel	510 613
	Spare Parts:				
⊳ 7301531-100.0070A	Lavatory mounting kit	0.01 lbs (0.01 kg)	0.01	N/A	5
⊳ 770248-100.0070A	Console mounting kit	0.46 lbs (0.21 kg)		N/A	5
⊳ 770256-200.XXX0A	Console feet	0.46 lbs (0.21 kg)		002 Polished Chrome 295 Brushed Nickel	16 19

See colors on inside front cover.

▷ Parts Program (Non-Premier)

Bathroom Furniture

American Standard

Retrospect[®]

Bathroom Furniture

Bathroom Furniture	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
tetrospect console Table	 Classically styled metal console table Uses Retrospect collection pedestal tops Console table legs feature classic styling with integral front and side towel bars Lower tempered glass shelf for storage Legs available in Polished Chrome Nominal Dimensions: 27" x 19-3/4" x 36" (686 x 502 x 914 mm) Bowl Sizes: 15-1/2" (394 mm) wide 12" (305 mm) front-to-back 6-1/8" (156 mm) deep 				
	Separate Components:				
0282.008	Console table top, faucet holes on 8" (203 mm) centers	54 lbs (25 kg)	1.72	020 White 222 Linen	340 424
0282.004	Console table top, faucet holes on 4" (102 mm) centers	54 lbs (24.5 kg)	1.72	020 White 222 Linen	340 424
8711.000	Console table legs	22 lbs (10 kg)	2.29	002 Polished Chrome	799

See colors on inside front cover.



Bathroom Furniture

Studio[®]

Bathroom Furniture	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Studio 9205 22" Vanity	 Contemporary style vanity Birch veneer construction Brushed nickel plated legs Interior shelf 	53 lbs (24 kg)	2.29	339 Espresso	660
	Nominal Dimensions: • 22" x 18-1/4" (559 x 464 mm) • 30" (762 mm) height without top				

Sink and Top Option for 9205.024:

Studio 0621.001 Above Counter Rectangular Vessel	 Contemporary above countertop rectangular sink design Integral faucet deck for single hole faucet Rear overflow Nominal Dimensions: 22" x 18-1/2" x 4-1/2" (559 x 470 x 114 mm) Bowl Sizes: 19-1/4" (487 mm) wide 12-5/8" (321 mm) front-to-back 2-5/8" (67 mm) deep 	38 lbs (17 kg)	0.82	020 White	346
Studio Mirror 9205.101	 Birch veneer construction Coordinates with Studio collection Nominal Dimensions: 28" x 22" (711 x 559 mm) 	21 lbs (9.5 kg)	0.67	339 Espresso	218

See colors on inside front cover.

Bathroom Furniture

American Standard

Bathroom Sinks

Choosing the perfect bathroom sink requires attention to detail. Is it practical and appealing? Does it fit the space? Will it be a focal point? The American Standard collection includes a style to satisfy every situation and design aesthetic.



American Standard

Bathroom Sinks at a Glance...



American Standard

Town Square[®] S

Bathroom Sinks		DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
own Square S		 Raised faucet ledge Rear overflow Supplied with mounting kit Design coordinates with Town Square S collection including console offering on page 157 Right height for greater comfort during use Open back pedestal Fine fireclay construction Nominal Dimensions: 30" x 22-1/2" (762 x 571 mm) 35" (889 mm) height Bowl Sizes: 17-1/2" (445 mm) wide 12-1/4" (311 mm) front-to-back 5-1/4" (133 mm) deep 				
				< - 1		
	0297400	Town Square SFaucet holes on 4" (102 mm) centers			020 White	494
	0297400 0297800	-			020 White 020 White 222 Linen	494 500 625
		Faucet holes on 4" (102 mm) centers Town Square S			020 White	500
	0297800	 Faucet holes on 4" (102 mm) centers Town Square S Faucet holes on 8" (203 mm) centers Town Square S 			020 White 222 Linen 020 White	500 625 500
	0297800	 Faucet holes on 4" (102 mm) centers Town Square S Faucet holes on 8" (203 mm) centers Town Square S Faucet holes – center hole only 	41 lbs (26 kg)	1.37	020 White 222 Linen 020 White	500 625 500
	0297800 0297100	 Faucet holes on 4" (102 mm) centers Town Square S Faucet holes on 8" (203 mm) centers Town Square S Faucet holes – center hole only Separate Components: 		1.37	020 White 222 Linen 020 White 222 Linen	500 625 500 625
	0297800 0297100 0297004	 Faucet holes on 4" (102 mm) centers Town Square S Faucet holes on 8" (203 mm) centers Town Square S Faucet holes – center hole only Separate Components: Pedestal top – faucet holes on 4" (102 mm) centers 	(26 kg) 41 lbs		020 White 222 Linen 020 White 222 Linen 020 White 020 White	500 625 500 625 315 321

American Standard

Townsend®

Bathroom Sinks	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Townsend	 Raised faucet ledge Rear overflow Supplied with mounting kit Design coordinates with Townsend collection including furniture offerings on pages 161-162 Right height for greater comfort during use Open back pedestal Fine fireclay construction Nominal Dimensions: 30" x 19-1/2" (762 x 495 mm) 35-1/4" (895 mm) height Bowl Sizes: 19" (485 mm) wide 12-3/4" (324 mm) front-to-back 5" (128 mm) deep 				
0328.400	• Faucet holes on 4" (102 mm) centers			020 White 222 Linen	447 559
0328.800	• Faucet holes on 8" (203 mm) centers			020 White 222 Linen	447 559
0328.100	TownsendFaucet holes – center hole only			020 White 222 Linen	447 559
	Separate Components:		1		1
0328.004	Pedestal top – faucet holes on 4" (102 mm) centers	58 lbs (26 kg)	1.37	020 White 222 Linen	315 395
0328.008	Pedestal top – faucet holes on 8" (203 mm) centers	58 lbs (26 kg)	1.37	020 White 222 Linen	315 395
0328.001	Pedestal top – center hole only	58 lbs (26 kg)	1.37	020 White 222 Linen	315 395
0039.001	Pedestal leg	36 lbs (16 kg)	0.92	020 White 222 Linen	132 164

American Standard

Boulevard®

Bathroom Sinks	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Boulevard	 Classically styled rectangular pedestal sink Rear overflow Supplied with mounting kit Right height for greater comfort during use Design coordinates with Boulevard toilet Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with U-shaped cutout) Fine fireclay construction 				
	Nominal Dimensions: • 24" x 19" (610 x 483 mm) • 35-1/2" (902 mm) height				
	Bowl Sizes: • 17" (432 mm) wide • 12-1/2" (318 mm) front-to-back • 5" (127 mm) deep				
0641.400	Boulevard • Faucet holes on 4" (102 mm) centers			020 White	351
0641.800	Boulevard • Faucet holes on 8" (203 mm) centers			020 White	351
				020 White	351
0641.100	BoulevardFaucet holes – center hole only			0_0	
0641.100					
0641.100 0641.004	Faucet holes – center hole only	49 lbs (22 kg)	1.00	020 White	217
	Faucet holes – center hole only Separate Components:		1.00		217
0641.004	Faucet holes – center hole only Separate Components: Pedestal top – faucet holes on 4" (102 mm) centers	(22 kg) 49 lbs		020 White	

American Standard

Retrospect[®]

Bathroom Sinks	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Retrospect	 Authentically styled pedestal Hidden front overflow Supplied with mounting kit Design coordinates with Retrospect Champion[®] and Heritage[®] VorMax[®] toilets Right height for greater comfort during use Made of vitreous china 		1		
	Nominal Dimensions: • 27" x 19-3/4" (686 x 502 mm) • 36" (914 mm) height)			-	68
	Bowl Sizes: • 15-1/2" (394 mm) wide • 12" (305 mm) front-to-back • 6-1/8" (156 mm) deep				
		DE COSE			R
0282.400	RetrospectFaucet holes on 4" (102 mm) centers			020 White	535
0282.800	Retrospect • Faucet holes on 8" (203 mm) centers			020 White	535
	Separate Components:				
0282.004	Pedestal top – 4" (102 mm) centers	54 lbs (24.5 kg)	1.72	020 White	340
0282.008	Pedestal top – 8" (203 mm) centers	54 lbs (24.5 kg)	1.72	020 White	340
0066.000 SR MAP	Pedestal leg	30 lbs (13.6 kg)	1.19	020 White	195

American Standard

Portsmouth®

Bathroom Sinks	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Portsmouth	 Turn-of-the-century detailing on sink and pedestal leg Faucet ledge with large deck area Rear overflow Supplied with mounting kit Right height for greater comfort during use Design coordinates with Portsmouth Champion® toilets Made of vitreous china Nominal Dimensions: 24-3/8" x 19-1/2" (619 x 495 mm) 35-7/16" (900 mm) height Bowl Sizes: 19-1/4" (489 mm) wide 11-3/8" (289 mm) front-to-back 5-3/4" (146 mm) deep 				
		III	44P		
0555.401	Portsmouth Faucet holes on 4" (102 mm) centers 			020 White 222 Linen	379 478
0555.401 0555.801					
	Faucet holes on 4" (102 mm) centers Portsmouth			222 Linen 020 White	478 379
0555.801	 Faucet holes on 4" (102 mm) centers Portsmouth Faucet holes on 8" (203 mm) centers Portsmouth 			222 Linen 020 White 222 Linen 020 White	478 379 478 379
0555.801	 Faucet holes on 4" (102 mm) centers Portsmouth Faucet holes on 8" (203 mm) centers Portsmouth Faucet holes – center hole only 	42 lbs (19 kg)	2.08	222 Linen 020 White 222 Linen 020 White	478 379 478 379
0555.801 0555.101	 Faucet holes on 4" (102 mm) centers Portsmouth Faucet holes on 8" (203 mm) centers Portsmouth Faucet holes – center hole only Separate Components: 		2.08	222 Linen 020 White 222 Linen 020 White 222 Linen 020 White	478 379 478 379 478 224
0555.801 0555.101 0555.104	 Faucet holes on 4" (102 mm) centers Portsmouth Faucet holes on 8" (203 mm) centers Portsmouth Faucet holes – center hole only Separate Components: Pedestal top – 4" (102 mm) centers 	(19 kg) 42 lbs		222 Linen 020 White 222 Linen 020 White 222 Linen 020 White 222 Linen 020 White	478 379 478 379 478 224 224 224 224

American Standard

Tropic[®] Petite

Bathroom Sinks	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Tropic Petite	 Contemporary design pedestal sink Rear overflow Supplied with mounting kit Right height for greater comfort during use Basin has flat bottom to also allow use as an above counter sink or a drop in sink Fine fireclay construction Nominal Dimensions: 21" x 18-1/2" (533 x 470 mm) 36" (914 mm) height Bowl Sizes: 17-1/2" (445 mm) wide 11-1/2" (292 mm) front-to-back 5-1/2" (140 mm) deep 				
0403.400	Tropic PetiteFaucet holes on 4" (102 mm) centers			020 White	329
0403.800	Tropic PetiteFaucet holes on 8" (203 mm) centers			020 White	329
	Separate Components:				
0403.004	Pedestal top – 4" (102 mm) centers	32 lbs (14.5 kg)	1.15	020 White	195
0403.008	Pedestal top – 8" (203 mm) centers	32 lbs (14.5 kg)	1.15	020 White	195
Imap Imap 0010.000 Imap White Only. 0010.000	Pedestal leg	24 lbs (11 kg)	0.70	020 White	134

American Standard

Ravenna®

Pedestal Sinks

Bathroom Sinks	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
avenna	 Contemporary design Faucet ledge with generous shelf area Rear overflow Soap/accessory ledge Available integral mounted towel bar (order separately) Supplied with mounting kit Made of vitreous china Nominal Dimensions: 24-1/4" x 20" (616 x 508 mm) 34" (864 mm) height Bowl Sizes: 19-3/8" (492 mm) wide 12" (305 mm) front-to-back 6" (152 mm) deep 				
0268.40	 Ravenna Faucet holes on 4" (102 mm) centers 			020 White	319
0268.80	 Ravenna Faucet holes on 8" (203 mm) centers 			020 White	319
0268.10	 Ravenna Faucet holes – center hole only 			020 White	319
	Separate Components:				
0268.00	Pedestal top – 4" (102 mm) centers	41 lbs (18.6 kg)	1.27	020 White	218
	8 Pedestal top – 8" (203 mm) centers	41 lbs	1.27	020 White	218
0268.00		(18.6 kg)			
0268.00			1.27	020 White	218
	Pedestal top – center hole only	(18.6 kg) 41 lbs		020 White 020 White	218
0268.00	 Pedestal top – center hole only Pedestal leg 	(18.6 kg) 41 lbs (18.6 kg) 27 lbs	1.27		

 \triangleright Parts Program (Non-Premier)

American Standard

Cadet®

Bathroom Sinks	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Cadet	 Faucet/soap/accessory ledge with generous shelf area Rear overflow Supplied with mounting kit Design coordinates with Cadet toilets Made of vitreous china Nominal Dimensions: 24-1/2" x 20" x 35" (622 x 508 x 889 mm) Bowl Sizes: 20" (508 mm) wide 12" (305 mm) front-to-back 6" (152 mm) deep 				
0236.411	Cadet • Faucet holes on 4" (102 mm) centers			020 White	259
0236.811	Cadet • Faucet holes on 8" (203 mm) centers			020 White	259
0236.111	Cadet • Faucet holes – center hole only			020 White	259
	Separate Components:				
0236.004	Pedestal top – 4" (102 mm) centers	35 lbs (16 kg)	1.27	020 White	189
0236.008	Pedestal top – 8" (203 mm) centers	35 lbs (16 kg)	1.27	020 White	189
0236.001	Pedestal top – center hole only	35 lbs (16 kg)	1.27	020 White	189
731100-400	Pedestal leg	27 lbs (12.3 kg)	0.76	020 White	70

American Standard

Edgemere®

Bathroom Sinks	DESCRIPTION	NET WEIGHT	PTS	COLORS	list Price
dgemere	 Faucet/soap/accessory ledge with generous shelf area Rear overflow Supplied with mounting kit Design coordinates with Edgemere collection including console table on page 163 Fine fireclay construction Nominal Dimensions: 25" x 19-1/2" x 35-5/8" (635 x 495 x 905 mm) Bowl Sizes: 17-1/8" (435 mm) wide 12" (305 mm) front-to-back 5-1/4" (133 mm) deep 				
0445.400	Edgemere • Faucet holes on 4" (102 mm) centers			020 White	276
0445.400 0445.800	Faucet holes on 4" (102 mm) centers			020 White 020 White	276
	Faucet holes on 4" (102 mm) centers Edgemere Faucet holes on 8" (203 mm) centers				
0445.800	 Faucet holes on 4" (102 mm) centers Edgemere Faucet holes on 8" (203 mm) centers Edgemere 			020 White	276
0445.800	 Faucet holes on 4" (102 mm) centers Edgemere Faucet holes on 8" (203 mm) centers Edgemere Faucet holes – center hole only Separate Components: 	35 lbs (16 kg)	1.25	020 White	276
0445.800 0445.100	 Faucet holes on 4" (102 mm) centers Edgemere Faucet holes on 8" (203 mm) centers Edgemere Faucet holes – center hole only Separate Components: Pedestal top – 4" (102 mm) centers 		1.25	020 White 020 White	276
0445.800 0445.100 0445.004	 Faucet holes on 4" (102 mm) centers Edgemere Faucet holes on 8" (203 mm) centers Edgemere Faucet holes – center hole only Separate Components: Pedestal top – 4" (102 mm) centers Pedestal top – 8" (203 mm) centers 	(16 kg) 35 lbs		020 White 020 White 020 White	276 276 179

American Standard

Cornice™

Bathroom Sinks	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Cornice Pedestal or Wall-Hung Corner Sink	 Corner sink and pedestal Corner sink without pedestal can also be wall-hung. Supplied with wall hanger Rim slants toward drain for quick drainage Twin front concealed overflows Made of vitreous china Nominal Dimensions: 18-7/8" x 18-7/8" (480 x 480 mm) 33-1/8" (841 mm) height Bowl Dimensions: 14" (356 mm) wide 12" (305 mm) front-to-back 6-1/2" - 7" (165 - 178 mm) deep 				
			en al		
0611.400	Cornice Pedestal • Faucet holes on 4" (102 mm) centers			020 White	374
0611.400 0611.100				020 White 020 White	374 374
	Faucet holes on 4" (102 mm) centers Cornice Pedestal				
	 Faucet holes on 4" (102 mm) centers Cornice Pedestal Faucet holes – center hole only 	33 lbs (15 kg)	1.01		-
0611.100	Faucet holes on 4" (102 mm) centers Cornice Pedestal Faucet holes – center hole only Separate Components:		1.01	020 White	374

American Standard

Evolution®

Pedestal Sinks

Bathroom Sinks	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
ivolution 24"	 Faucet ledge with generous shelf area Rear overflow Soap/accessory ledge Supplied with mounting kit Made of vitreous china Nominal Dimensions (Approximate): 24" x 18-3/4" (610 x 477 mm) 34-1/4" (870 mm) height Bowl Sizes (Approximate): 19-3/4" (502 mm) wide 12" (305 mm) front-to-back 6" (152 mm) deep 				
0468.40	 Evolution 24" Faucet holes on 4" (102 mm) centers 			020 White	216
0468.80	 Evolution 24" Faucet holes on 8" (203 mm) centers 			020 White	216
0468.10	 Evolution 24" Faucet holes – center hole only 			020 White	216
	Separate Components:				
0468.00	Pedestal top – 4" (102 mm) centers	37 lbs (16.8 kg)	1.27	020 White	137
0468.00	Pedestal top – 8" (203 mm) centers	37 lbs (16.8 kg)	1.27	020 White	137
0468.00	Pedestal top – center hole only	35 lbs (16 kg)	1.27	020 White	137
731150-40	Pedestal leg	27 lbs (12.3 kg)	0.76	020 White	79

American Standard


Evolution®

Pedestal Sinks

Bathroom Sinks	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Evolution 22"	 Faucet ledge with generous shelf area Rear overflow Soap/accessory ledge Supplied with mounting kit Made of vitreous china Nominal Dimensions: 22" x 17-1/2" (558 x 444 mm) 34-1/4" (870 mm) Bowl Sizes: 18-1/4" (464 mm) wide 11" (279 mm) front-to-back 6" (152 mm) deep 				
0467.400	Evolution 22" • Faucet holes on 4" (102 mm) centers			020 White	188
0467.800	Evolution 22"Faucet holes on 8" (203 mm) centers			020 White	188
0467.100	Evolution 22"Faucet holes – center hole only			020 White	188
	Separate Components:			1	<u>.</u>
0467.004	Pedestal top – 4" (102 mm) centers	35 lbs (16 kg)	1.27	020 White	109
0467.008	Pedestal top – 8" (203 mm) centers	35 lbs (16 kg)	1.27	020 White	109
0467.001	Pedestal top – center hole only	35 lbs (16 kg)	1.27	020 White	109
731150-400	Pedestal leg	27 lbs (12.3 kg)	0.76	020 White	79

American Standard

Pedestal Sinks — Drain Chase Information

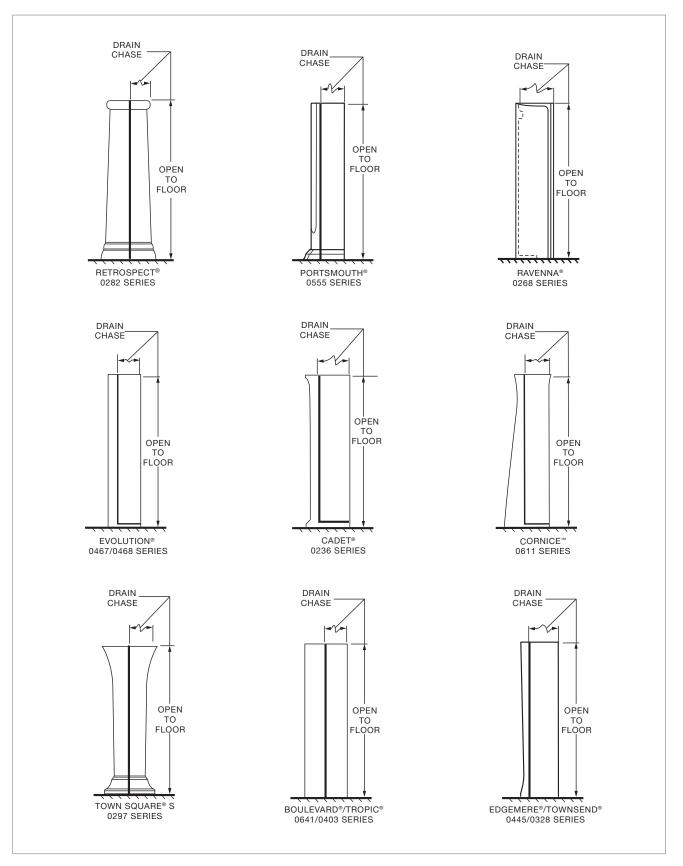

American Standard

Above Counter Sinks

Above Counter Sinks	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Town Square® S Vanity Sinks	 Vitreous china top Rectangular above counter vanity sink Rear overflow Design coordinates with Town Square S collection Supplied with cut-out template Sink can be used with washstand furniture or counter by others including furniture offerings on page 158 				
	Nominal Dimensions: • 31" x 22-1/2" (787 x 571 mm)				
	Bowl Sizes: • 17-3/8" (442 mm) wide • 12" (305 mm) front-to-back • 4-5/8" (118 mm) deep				
0298008	 Town Square S Vanity Top Faucet holes on 8" (203 mm) centers 	44 lbs (20 kg)	1.92	020 White 222 Linen	346 432
0298001	Town Square S Vanity Top • Center hole only	44 lbs (20 kg)	1.92	020 White 222 Linen	346 432
Townsend®	 Rectangular above counter sink Front overflow Sink has glazed back wall Design coordinates with Townsend collection including furniture offerings on pages 161-162 Supplied with cut-out template Fine fireclay construction 				
	Nominal Dimensions: • 24" x 18" (610 x 457 mm) Bowl Sizes: • 16" (405 mm) wide • 11" (280 mm) front-to-back • 5" (128 mm) deep				
0329.004	Townsend • Faucet holes on 4" (102 mm) centers	49 lbs (22.2 kg)	1.14	020 White 222 Linen	259 323
0329.008	Townsend Faucet holes on 8" (203 mm) centers 	49 lbs (22.2 kg)	1.14	020 White 222 Linen	259 323
0329.001	Townsend Faucet holes – center hole only 	49 lbs (22.2 kg)	1.14	020 White 222 Linen	259 323

American Standard

Above Counter Sinks

Above Counter Sinks	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Boulevard®	 Classically styled rectangular above counter sink Rear overflow Design coordinates with Boulevard toilet Basin has flat bottom to also allow use as a drop-in sink (with U-shaped cutout) Fine fireclay construction 				
	Nominal Dimensions: • 24" x 19" (610 x 483 mm)				
	Bowl Sizes: • 17" (432 mm) wide • 12-1/2" (318 mm) front-to-back • 5" (127 mm) deep				
0641.004	Boulevard • Faucet holes on 4" (102 mm) centers	49 lbs (22.2 kg)	1.00	020 White	217
0641.008	BoulevardFaucet holes on 8" (203 mm) centers	49 lbs (22.2 kg)	1.00	020 White	217
0641.001	BoulevardFaucet holes – center hole only	49 lbs (22.2 kg)	1.00	020 White	217
Morning™	 Sink for above counter installation Integral faucet deck for single hole faucet Center drain outlet Without overflow Supplied with cut-out template Made of vitreous china Nominal Dimensions: 17-3/4" (451 mm) round Bowl Sizes: 15" (381 mm) round 4-1/4" (108 mm) deep 				
★ 0670.000	Morning Above counter sink 	16 lbs (7.3 kg)	1.15	020 White	347
*0670.312	MorningSame as above with front overflow	16 lbs (7.3 kg)	1.15	020 White	359
Tropic [®] Petite	 Contemporary design Rear overflow Basin has flat bottom to also allow use as a drop-in sink Fine fireclay construction Nominal Dimensions: 				
	 21" x 18-1/2" (533 x 470 mm) Bowl Sizes: 17-1/2" (445 mm) wide 11-1/2" (292 mm) front-to-back 5-1/2" (140 mm) deep 				
0403.004	Tropic PetiteFaucet holes on 4" (102 mm) centers	32 lbs (14.5 kg)		020 White	195
0403.008	Tropic PetiteFaucet holes on 8" (203 mm) centers	32 lbs (14.5 kg)	1.15	020 White	195

Bathroom Sinks



Above Counter Sinks

Above Counter Sinks	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Studio® 0621.001 Above Counter Rectangular Vessel	 Contemporary above countertop rectangular sink design Integral faucet deck for single hole faucet Rear overflow Fits most standard 22" (559 mm) vanities No glaze on back wall Made of vitreous china Nominal Dimensions: 22" x 18-1/2" x 4-1/2" (559 x 470 x 114 mm) Bowl Sizes: 19-1/4" (487 mm) wide 12-5/8" (321 mm) front-to-back 2-5/8" (67 mm) deep Recommended with 9205.024 Studio 22" vanity. 	38 lbs (17.2 kg)	0.82	020 White	346
Loft [®] Counter Basin 0552.000	 Above counter basin No faucet holes Cut-out template supplied Fine fireclay construction Nominal Dimensions: 19-5/8" x 15-3/4" x 5-7/8" (499 x 399 x 150 mm) Bowl Sizes: 18-9/16" (471 mm) wide 14-5/8" (371 mm) front-to-back 5" (127 mm) deep 	49 lbs (22.2 kg)	1.27	020 White	260
Loft Counter Vessel 0552.001	 Above counter sink Integral faucet deck for single hole faucet Cut-out template supplied Rear overflow No glaze on back wall Fine fireclay construction Nominal Dimensions: 19-5/8" x 17-11/16" x 5-7/8" (499 x 449 x 150 mm) Bowl Sizes: 18-9/16" (471 mm) wide 12-1/2" (318 mm) front-to-back 5" (127 mm) deep 	49 lbs (22.2 kg)	1.27	020 White	270
Celerity [™] ★ 0514.000 Above Counter Vessel	 No overflow Made of vitreous china Nominal Dimensions: 17" (432 mm) diameter 4" (102 mm) height 	16 lbs (7.3 kg)	0.52	020 White	328



Drop-in Sinks	DESCRIPTION	NET WEIGHT	PTS	COLORS	list Price
Boxe® Semi-Countertop	 Space-saving design installs on a 13" (330 mm) minimum depth countertop Self-rimming with sealant Rear overflow Supplied with mounting kit and template Fine fireclay construction Nominal Dimensions: 19-3/4" x 17-3/4" (500 x 450 mm) Bowl Sizes: 15" (381 mm) wide 10-1/2" (267 mm) front-to-back 4-1/2" (114 mm) deep 				
0342.008	Boxe • Faucet holes on 8" (203 mm) centers	33 lbs (15 kg)	1.15	020 White	271
0342.001	Boxe • Faucet holes – center hole only	33 lbs (15 kg)	1.15	020 White	271
	Separate Component:				
8412.000	Optional towel bar (sold separately)		0.04	002 Polished Chrome	75
Mezzo [™] Semi-Countertop	 Space-saving design installs on a 13" (330 mm) minimum depth countertop Self-rimming, semi-countertop sink Generous bowl area Rear overflow Supplied with template, sealant and mounting kit Made of vitreous china Nominal Dimensions: 22" x 21-1/2" (559 x 546 mm) Bowl Sizes: 19" (483 mm) wide 15" (381 mm) front-to-back 6-7/8" (175 mm) deep 				
9960.403	Mezzo Faucet holes on 4" (102 mm) centers 	45 lbs (20.4 kg)	1.43	020 White	245
9960.803	Mezzo Faucet holes on 8" (203 mm) centers 	45 lbs (20.4 kg)	1.43	020 White	245
9960.001	Mezzo Faucet holes – center hole only 	45 lbs (20.4 kg)	1.43	020 White	245

ADA When nose of bowl is maximum 34" (864 mm) from finished floor. Refer to product specification sheet for full details.

▷ Parts Program (Non-Premier)

Bathroom Sinks

American Standard

Drop-in Sinks	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Town Square® S	 Self-rimming fireclay drop-in sink Front overflow Decorative rim detailing with tapered interior bowl design Supplied with cut-out template Design coordinated to Town Square S suite 				
	Nominal Dimensions: • 24" x 19-1/16" (609 mm x 484 mm)				
	Bowl Sizes: • 17-7/16" (443 mm) wide • 11-7/8" (301 mm) front-to-back • 5-1/2" (140 mm) deep				
1203004	Town Square S • Faucet holes on 4" (102 mm) centers	32 lbs (14.5 kg)	1.10	020 White	279
1203008	Town Square S Faucet holes on 8" (203 mm) centers 	32 lbs (14.5 kg)	1.10	020 White	279
1203001	Town Square S	32 lbs	1.10	020 White	279
	Faucet holes – center hole only	(14.5 kg)			

American Standard

Drop-in Sinks		DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Boulevard [®] Drop-In		 Classically styled rectangular drop-in sink Rear overflow Basin has flat bottom to also allow use as an above counter sink Requires U-shaped counter cut-out template, supplied Fine fireclay construction 				
		Nominal Dimensions: • 24" x 19" (610 x 483 mm)				
		Bowl Sizes: • 17" (432 mm) wide • 12-1/2" (318 mm) front-to-back • 5" (127 mm) deep				
	0641.004	Boulevard Drop-inFaucet holes on 4" (102 mm) centers	49 lbs (22.2 kg)	1.00	020 White ★222 Linen	217 262
	0641.008	Boulevard Drop-inFaucet holes on 8" (203 mm) centers	49 lbs (22.2 kg)	1.00 1.40	020 White ★222 Linen	217 262
White Only.	0641.001	Boulevard Drop-in • Faucet holes – center hole only	49 lbs (22.2 kg)	1.00 1.40	020 White ★222 Linen	217 262
Studio Carré®		 Square self-rimming, drop-in sink with rectangular curved bottom bowl Rear overflow Supplied with cut-out template Made of vitreous china 				
		Nominal Dimensions: • 16-1/4" x 16-1/4" (413 x 413 mm)				
		Bowl Sizes: • 12-1/2" (318 mm) wide • 9-3/8" (238 mm) front-to-back • 4-3/4" (121 mm) deep				
	0642.008	Studio Carré • Faucet holes on 8" (203 mm) centers	17 lbs (7.7 kg)	0.64	020 White	219
	0642.001	Studio Carré • Faucet holes – center hole only	17 lbs (7.7 kg)	0.64	020 White	219

ADA Countertop 34" (864 mm) from finished floor. Refer to product specification sheet for full details.

Studio [®] Drop-In	 Rectangular self-rimming, drop-in sink with rectangular curved bottom bowl Front overflow Supplied with cut-out template Made of vitreous china 				
	Nominal Dimensions: • 21" x 17-3/4" (533 x 451 mm)				
0	Bowl Sizes: • 18" (457 mm) wide • 12" (305 mm) front-to-back • 4-1/2" (114 mm) deep				
0643.008	Studio Drop-in Faucet holes on 8" (203 mm) centers	17 lbs (7.7 kg)	0.96	020 White	285
0643.001 SR MAP	Studio Drop-in Faucet holes – center hole only	17 lbs (7.7 kg)	0.96	020 White	285

ADA Countertop 32-3/4" (832 mm) from finished floor. Refer to product specification sheet for full details.



Drop-in Sinks

Drop-in Sinks	DESCRIPTION	NET WEIGHT	NET	COLORS	LIST Price
Tropic [®] Petite	 Contemporary design Rear overflow Basin has flat bottom to also allow use as a above counter sink Fine fireclay construction 				
	Nominal Dimensions: • 21" x 18-1/2" (533 x 470 mm)				
	Bowl Sizes: • 17-1/2" (445 mm) wide • 11-1/2" (292 mm) front-to-back • 5-1/2" (140 mm) deep				
0403.004	Tropic PetiteFaucet holes on 4" (102 mm) centers	32 lbs (14.5 kg)	1.15	020 White ★222 Linen	195 231
Imap White Only. 0403.008	Tropic PetiteFaucet holes on 8" (203 mm) centers	32 lbs (14.5 kg)	1.15	020 White ★222 Linen	195 231
Countertop 34" (864 mm) fror	n finished floor. Refer to product specification sheet f	or full details.		1	
Royton™	 Self-rimming drop-in sink without faucet deck Front overflow Center drain outlet Supplied with cut-out template Made of vitreous china 				
0	Nominal Dimensions: • 13-3/4" (349 mm) round				
	Bowl Sizes: • 10-3/4" (273 mm) round • 5-1/2" (140 mm) deep				
*0571.000	Royton • Sink less faucet deck	11 lbs (5 kg)	1.27	020 White	215
Piazza™	 Self-rimming drop-in sink Large faucet deck Generous bowl area Front overflow Supplied with cut-out template Made of vitreous china 				
0	Nominal Dimensions: • 23-1/2" x 18-3/8" (597 x 467 mm)				
	Bowl Sizes: • 18-1/2" (470 mm) wide • 11-3/4" (298 mm) front-to-back • 6-1/2" (165 mm) deep				
★0478.403	PiazzaFaucet holes on 4" (102 mm) centers	25 lbs (11.4 kg)	1.15	020 White	165
★0478.803	PiazzaFaucet holes on 8" (203 mm) centers	25 lbs (11.4 kg)	1.15	020 White	162
SR ★0478.001 MAP White Only.	Piazza	25 lbs (11.4 kg)	1.15	020 White	165

ADA Countertop 34" (864 mm) from finished floor. Refer to product specification sheet for full details.

American Standard

Drop-in Sinks	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Aqualyn®	 Self-rimming oval drop-in sink Tapered edges for style Front overflow Supplied with cut-out template Made of vitreous china 				
	Nominal Dimensions: • 20-3/8" x 17-3/8" (518 x 441 mm)				
	Bowl Sizes: • 16" (406 mm) wide • 10" (254 mm) front-to-back • 5-5/8" (143 mm) deep				
0476.028	Aqualyn Faucet holes on 4" (102 mm) centers 	20 lbs (9 kg)	0.00	020 White 021 Bone 222 Linen	106 133 133
0475.020	Aqualyn Faucet holes on 8" (203 mm) centers 	20 lbs (9 kg)	0.76	020 White 021 Bone 222 Linen	105 132 132
0475.047	Aqualyn Faucet holes – center hole only 	20 lbs (9 kg)	0.76	020 White 021 Bone 222 Linen	105 132 132

ADA Countertop 34" (864 mm) from finished floor. Refer to product specification sheet for full details.

Aqualyn	 Countertop sink with extra hole for lotion dispenser Faucet holes on 4" (102 mm) centers Extra hole measures 1-3/8" (35 mm) diameter Short shank soap/lotion dispenser required Self-rimming with cut-out template Made of vitreous china Nominal Dimensions: 20-3/8" x 17-3/8" (518 x 441 mm) 				
0476.037	Aqualyn Extra right-hand hole 	20 lbs (9 kg)	0.76	020 White	145
0475.035	Aqualyn • Extra left-hand hole	20 lbs (9 kg)	0.76	020 White	145
	Countertop Sink Less Overflow:			11	
0476.928	Aqualyn Faucet holes on 4" (102 mm) centers Less overflow 	20 lbs (9 kg)	0.76	020 White	145
0475.920	Aqualyn Faucet holes on 8" (203 mm) centers Less overflow 	20 lbs (9 kg)	0.76	020 White	145

ADA Countertop 34" (864 mm) from finished floor. Refer to product specification sheet for full details.

NOTE: Once an established product modification has been scheduled for production, it may not be changed and/or cancelled.

Bathroom Sinks

American Standard

Drop-in Sinks

Drop-in Sinks	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Rondalyn®	 Self-rimming round drop-in sink Tapered edges for style Front overflow Supplied with cut-out template Made of vitreous china 				
	Nominal Dimensions: • 19-1/8" (486 mm) diameter				
	Bowl Sizes: • 15" (381 mm) wide • 12-1/8" (308 mm) front-to-back • 5-3/4" (146 mm) deep				
0491.019	RondalynFaucet holes on 4" (102 mm) centers	20 lbs (9 kg)	0.92	020 White 021 Bone 222 Linen	106 133 133
★0490.011	Rondalyn Faucet holes on 8" (203 mm) centers 	22 lbs (10 kg)	0.83	020 White 021 Bone 222 Linen	106 133 133
★ 0490.156	Rondalyn Faucet holes – center hole only 	20 lbs (9 kg)	0.83	020 White 021 Bone 222 Linen	106 133 133

ADA Countertop 34" (864 mm) from finished floor. Refer to product specification sheet for full details.

American Standard

Under Counter Sinks

Under Counter Sinks	DESCRIPTION	NET WEIGHT	PTS	COLORS	list Price
Fownsend®	 Rectangular under counter mount sink Unglazed rim Front overflow Supplied with under counter mounting kit and template Design coordinates with Townsend collection including furniture offerings on pages 161-162 Made of vitreous china Nominal Dimensions: 				
	 19-1/2" x 13-5/8" (495 x 346 mm) Bowl Size: 17-3/4" (450 mm) wide 11-5/8" (294 mm) front-to-back 4-1/2" (115 mm) deep 				
0330.000	Townsend • Under counter sink	23 lbs (10.4 kg)	0.70	020 White 222 Linen	227 285
	Separate Component:				
Ø SR MAP ▷ 047194-0070A	Mounting kit (furnished)		0.001		17
DA Countertop 34" (864 mm) fro	m finished floor. Refer to product specification sheet for	or full details.			
Boulevard®	 Rectangular under counter mount sink with unique tapered interior bowl Unglazed rim Front overflow Supplied with under counter mounting kit and template Made of vitreous china 				
	Nominal Dimensions: • 20-1/4" x 16" (514 x 406 mm)				
	Bowl Size:				
	 17" (432 mm) wide 13" (330 mm) front-to-back 6" (152 mm) deep 				
0610.000	 17" (432 mm) wide 13" (330 mm) front-to-back 	23 lbs (10.4 kg)	0.76	020 White 222 Linen	301 380
0610.000	 17" (432 mm) wide 13" (330 mm) front-to-back 6" (152 mm) deep Boulevard		0.76		

ADA Countertop 34" (864 mm) from finished floor. Refer to product specification sheet for full details.

Bathroom Sinks

American Standard

Under Counter Sinks

Under Counter Sinks	DESCRIPTION	NET WEIGHT	PTS	COLORS	list Price
Studio®	 Rectangular under counter mount sink Unglazed rim Front overflow Supplied with under counter mounting kit and template Made of vitreous china 				
	Nominal Dimensions: • 19-3/4" x 13-3/4" (502 x 350 mm)				
	Bowl Size: • 18" (457 mm) wide • 12" (305 mm) front-to-back • 6-7/16" (164 mm) deep				
0614.000	Studio • Under counter sink	23 lbs (10.4 kg)	0.84	020 White 021 Bone 222 Linen	242 308 308
0614.300	Studio Under counter sink with glazed underside 	23 lbs (10.4 kg)	0.84	020 White	298
0618.000	Studio Nominal Dimensions: • 23-5/8" x 16-5/8" (600 x 422 mm)	23 lbs (10.4 kg)	1.72	020 White 021 Bone 222 Linen	272 344 344
	Bowl Size: • 21-1/16" (535 mm) wide • 14" (356 mm) front-to-back • 6-1/4" (159 mm) deep				
	Separate Component:				
Ø SR MAP ▷ 047194-0070A	Mounting kit (furnished)		0.001		17
ADA Countertop 34" (864 mm) fror	n finished floor. Refer to product specification sheet	for full details.		I	
Studio Carré®	 Square under counter mount sink Made from vitreous china Position overflow as either front or rear Supplied with under counter mounting kit and template Made of vitreous china 				
	Nominal Dimensions: • 16" x 16" (405 x 405 mm)				
	Bowl Sizes: • 13-1/2" (343 mm) wide • 13-1/2" (343 mm) front-to-back • 4-3/4" (121 mm) deep				
0426.000	Studio Carré Sink less faucet deck 	18 lbs (8.2 kg)	0.83	020 White 021 Bone 222 Linen	212 266 266
	Separate Component:				
	eopulate eomponenti				

American Standard

Under Counter Sinks

dgemere®					PRICE
6	 Rectangular under counter mount sink Unglazed rim Front overflow Supplied with kit for under counter installation Made from vitreous china Nominal Dimensions: 18-1/2" x 16-1/8" (471 x 410 mm) Bowl Dimensions: 16-3/4" (426 mm) wide 14-3/8" (365 mm) front to back 3" (77 mm) deep 				
0545.000	EdgemereUnder counter sink	20 lbs (9 kg)	0.64	020 White	164
	Separate Component:	1			
⊳047194-0070A	Mounting kit (furnished)		0.001		17
DA Countertop 34" (864 mm) fr	om finished floor. Refer to product specification sheet f	or full details		·	
Prbit™	 Round under counter mount sink Unglazed rim Front overflow Supplied with under counter mounting kit and template Made of vitreous china Nominal Dimensions: 15-1/2" (394 mm) diameter Bowl Sizes: 12-3/4" (324 mm) diameter 4-3/8" (111 mm) deep 				
0630.000	Orbit • Sink less faucet deck	20 lbs (9 kg)	0.64	020 White	203
	Separate Component:				
⊳ 047194-0070A	Mounting kit (furnished)		0.001		17

ADA Countertop 34" (864 mm) from finished floor. Refer to product specification sheet for full details.

American Standard

Under Counter Sinks

Under Counter Sinks	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Ovalyn® 0495.221	 Under counter mount sink Unglazed rim Front overflow Supplied with mounting kit and template Made of vitreous china Nominal Dimensions: 17-1/8" x 14-1/8" (435 x 359 mm) Bowl Sizes: 15-1/16" (382 mm) wide 12-1/16" (306 mm) front-to-back 5-1/2" (140 mm) deep 	17 lbs (7.7 kg)	0.76	020 White 021 Bone 222 Linen	102 126 126
0495.300	Ovalyn Same as above with glazed underside 	17 lbs (7.7 kg)	0.76	020 White	150
0496.221	Ovalyn Nominal Dimensions: • 19-1/4" x 16-1/4" (489 x 413 mm) Bowl Sizes: • 17" (432 mm) wide • 14" (356 mm) front-to-back • 5-1/2" (140 mm) deep	19 lbs (8.6 kg)	0.76	020 White 021 Bone 222 Linen	102 126 126
0496.30	Ovalyn Same as above with glazed underside 	20 lbs (9 kg)	0.76	020 White	150
0497.221	Ovalyn Nominal Dimensions: • 21-1/2" x 17-3/8" (546 x 441 mm) Bowl Sizes: • 19" (483 mm) wide • 15-3/8" (391 mm) front-to-back • 5-1/2" (140 mm) deep	23 lbs (10.4 kg)	0.76	020 White 021 Bone 222 Linen	160 200 200
0497.300	Ovalyn Same as above with glazed underside 	23 lbs (10.4 kg	0.76	020 White	211
	Separate Component:				
⊳ 047194-0070A	Mounting kit (furnished)		0.001		17
	from finished floor. Refer to product specification she				
Ovalyn® 9482.000 Universal Access	 Under counter mount sink Unglazed rim Rear overflow Supplied with mounting kit and template Made of vitreous china Nominal Dimensions: 19-1/4" x 15-3/4" (489 x 400 mm) Bowl Sizes: 16-3/4" (425 mm) wide 13-1/4" (337 mm) front-to-back 5-1/2" (140 mm) deep 4" (102 mm) bowl depth 	15 lbs (6.8 kg)	0.76	020 White	124

Separate Component: Mounting kit (furnished)

Countertop 34" (864 mm) from finished floor. Refer to product specification sheet for full details.

17

Bathroom Sinks

▷ Parts Program (Non-Premier)

American Standard

⊳047194-0070A

0.001

Wall-Hung Sinks

Wall-Hung Sinks	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Ravenna [®] Wall-Hung	 Contemporary wall-hung design Semi-pedestal P-trap cover for ease of cleaning Faucet ledge with generous shelf area for accessories Rear overflow Available integral mounted towel bar (order separately) Supplied with mounting kit Made of vitreous china Nominal Dimensions: 24-1/4" x 20" (616 x 508 mm) Bowl Sizes: 19-3/8" (492 mm) wide 12" (305 mm) front-to-back 6" (152 mm) deep 				
0268.444	Ravenna Faucet holes on 4" (102 mm) centers 			020 White	388
0268.888	RavennaFaucet holes on 8" (203 mm) centers			020 White	388
0268.144	RavennaFaucet holes – center hole only			020 White	388
	Separate Components:	11			
0268.004	Pedestal top – 4" (102 mm) centers	41 lbs (18.6 kg)	1.27	020 White	218
0268.008	Pedestal top – 8" (203 mm) centers	41 lbs (18.6 kg)	1.27	020 White	218
0268.001	Pedestal top – center hole only	41 lbs (18.6 kg)	1.27	020 White	218
0044.000	Semi-pedestal leg	26 lbs (11.8 kg)	0.42	020 White	170
3520.000	Integral towel bar		0.57	002 Polished Chrome 295 Brushed Nickel	82 101
⊳738520-0070A	Towel bar mounting kit (furnished with towel		0.001		25

American Standard

Wall-Hung Sinks

Wall-Hung Sinks	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Murro™	 Wall-hung sink with EverClean[®] Antimicrobial Surface Recessed self-draining deck Available with rear and sealed overflow For concealed arm or wall support ADA and TAS compliant Made of vitreous china 				
	Nominal Dimensions: • 21-7/8" x 20-7/8" (556 x 530 mm)				
	Bowl Sizes: • 15-1/2" (394 mm) wide • 12-3/4" (323 mm) front-to-back • 5" (127 mm) deep				
0059.020EC Shroud sold separately	With Overflow				
0054 00450		40 lba	1.05	000 W/bite	010
0954.004EC	Murro • Faucet holes on 4" (102 mm) centers with overflow	40 lbs (18 kg)	1.25	020 White	218
0958.008EC	Murro • Faucet holes on 8" (203 mm) centers with overflow	40 lbs (18 kg)	1.25	020 White	218
0955.001EC	Murro • Faucet holes – center hole only with overflow	40 lbs (18 kg)	1.25	020 White	218
	Less Overflow				
0954.904EC	Murro • Faucet holes on 4" (102 mm) centers less overflow	40 lbs (18 kg)	1.43	020 White	242
0958.908EC	Murro • Faucet holes on 8" (203 mm) centers less overflow	40 lbs (18 kg)	1.25	020 White	242
0955.901EC	Murro • Faucet holes – center hole only less overflow	40 lbs (18 kg)	1.25	020 White	242
	Soap Dispenser With Overflow				
0954.123EC	 Murro Faucet holes on 4" (102 mm) centers with overflow Extra right-hand hole Extra hole measures 1-3/8" (35 mm) diameter 	40 lbs (18 kg)	1.43	020 White	242
0954.121EC	 Murro Faucet holes on 4" (102 mm) centers with overflow Extra left-hand hole Extra hole measures 1-3/8" (35 mm) diameter 	40 lbs (18 kg)	1.43	020 White	242
0955.123EC	 Murro Faucet hole – center hole only with overflow Extra right-hand hole Extra hole measures 1-3/8" (35 mm) diameter 	40 lbs (18 kg)	1.25	020 White	242
0955.121EC	 Murro Faucet hole – center hole only with overflow Extra left-hand hole Extra hole measures 1-3/8" (35 mm) diameter 	40 lbs (18 kg)	1.25	020 White	242
	Separate Components:		I		
0062.000EC	Acrylic shroud for AS Selectronic [®] faucets; conceals control box and thermostatic mixing valve (must be specified separately)		0.92	020 White	251
0059.020EC	Vitreous china shroud/knee contact guard (must be specified separately)	12 lbs (5.5 kg)	0.29	020 White	206

ADA Top of front rim mounted 34" (864 mm) from finished floor. Refer to product specification sheet for full details.

American Standard

Wall-Hung Sinks

Wall-Hung Sinks	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
ecorum®	 Wall-hung sink with EverClean[®] Antimicrobial Surface Recessed self-draining deck Available with rear overflow or without overflow For concealed arm or wall support ADA and TAS compliant Coordinates with Serin[®] 2064 faucet series (See pages 444-445) Made of vitreous china Nominal Dimensions: 18-1/4" x 20-1/16" (464 x 510 mm) Bowl Sizes: 13-15/16" (354 mm) wide 				
	 12-13/16" (325 mm) front-to-back 5" (127 mm) deep 				
	With Overflow			1	
9024.004EC	• Faucet holes on 4" (102 mm) centers with overflow	37 lbs (16.8 kg)	0.92	020 White	260
9024.008EC	 Decorum Faucet holes on 8" (203 mm) centers with overflow 	37 lbs (16.8 kg)	0.92	020 White	260
9024.001EC	DecorumFaucet holes – center hole only with overflow	37 lbs (16.8 kg)	0.92	020 White	260
9024.000EC	DecorumNo faucet holes with overflow	37 lbs (16.8 kg)	0.92	020 White	260
	Less Overflow				
9024.904EC	• Faucet holes on 4" (102 mm) centers less overflow	37 lbs (16.8 kg)	0.92	020 White	281
9024.908EC	Decorum Faucet holes on 8" (203 mm) centers less overflow	37 lbs (16.8 kg)	0.92	020 White	281
9024.901EC	 Decorum Faucet hole – center hole only less overflow 	37 lbs (16.8 kg)	0.92	020 White	281
	Soap Dispenser With Overflow				
9024.014EC	 Decorum Faucet holes on 4" (102 mm) centers with right-hand soap dispenser 	37 lbs (16.8 kg)	0.92	020 White	281
9024.024EC	 Decorum Faucet holes on 4" (102 mm) centers with left-hand soap dispenser 	37 lbs (16.8 kg)	0.92	020 White	281
9024.011EC	 Decorum Faucet hole – center hole only with right-hand soap dispenser 	37 lbs (16.8 kg)	0.92	020 White	281
9024.021EC	 Decorum Faucet hole – center hole only with left-hand soap dispenser 	37 lbs (16.8 kg)	0.92	020 White	281

ADA Top of front rim mounted 34" (864 mm) from finished floor. Refer to product specification sheet for full details.

Continued on next page.

Bathroom Sinks

American Standard

Wall-Hung Sinks

Wall-Hung Sinks	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Decorum®	 Wall-hung sink with EverClean[®] Antimicrobial Surface Recessed self-draining deck Available with rear overflow or without overflow For concealed arm or wall support ADA and TAS compliant Coordinates with Serin[®] 2064 faucet series (See pages 444-445) Made of vitreous china 				
	Nominal Dimensions: • 18-1/4" x 20-1/16" (464 x 510 mm)				
	Bowl Sizes: • 13-15/16" (354 mm) wide • 12-13/16" (325 mm) front-to-back • 5" (127 mm) deep				
	Soap Dispenser Less Overflow				
9024.914EC	 Decorum Faucet holes on 4" (102 mm) centers with right-hand soap dispenser less overflow 	37 lbs (16.8 kg)	0.92	020 White	302
9024.924EC	 Decorum Faucet holes on 4" (102 mm) centers with left-hand soap dispenser less overflow 	37 lbs (16.8 kg)	0.92	020 White	302
9024.921EC	 Decorum Faucet holes – center hole only with left-hand soap dispenser less overflow 	37 lbs (16.8 kg)	0.92	020 White	302
9024.911EC	 Decorum Faucet holes – center hole only with right-hand soap dispenser less overflow 	37 lbs (16.8 kg)	0.92	020 White	302

ADA Top of front rim mounted 34" (864 mm) from finished floor. Refer to product specification sheet for full details.

American Standard

Toilets

When considering a toilet, technology reigns. Does it meet your functional needs? Is it efficient? Does it have additional features to make daily maintenance easy? The American Standard collection includes a vast array of toilet designs to meet every requirement you demand.





VorMax[®] Plus Self-Cleaning Toilets

Cleaning system hidden inside bowl cleans the bowl with every flush

How it Works

VorMax Plus technology infuses LYSOL® toilet bowl cleaner into the water with each flush, freshening the bowl day after day. Its powerful VorMax jetted scrub allows Lysol toilet bowl cleaner to scrub the entire bowl, including under the CleanCurve® Rim. The VorMax Plus FreshInfuser® is hidden in a compartment and easy to access. There's nothing unsightly hanging inside of the bowl. Each VorMax Plus FreshInfuser lasts 30 days or 360 flushes* and provides an ocean fresh scent. Daily use of the VorMax Plus toilet offers continuous freshness, flush after flush. Two VorMax Plus FreshInfuser packs are included with purchase of the toilet.

Cleaning compartment is seamlessly hidden and easy to access

- · Slow-close, quick-release seat included for easy cleaning
- Available as HET (1.28 gpf/4.8 Lpf) or UHET (1.0 gpf/3.8 Lpf)



Cleaning compartment OPEN



VorMax Plus FreshInfuser 1610.001



Cleaning compartment CLOSED

ADA COMPLIANT

VORMAX PLUS TOILET DESCRIPTION	GPF/ LPF	TRIP LEVER	COLOR	COMBINATION	PAGE	ADA ELONGATED BOWL WITH SEAT	12" ROUGH TANK
Two-Piece RH EL	1.28/	Left	020	238AA.104CP.020	217	3385A.100CP.020	4385A.104.020
VorMax Plus HET with Seat	4.8	Right	020	238AA.105CP.020	217	3385A.100CP.020	4385A.105.020
Two-Piece RH EL VorMax Plus UHET	1.0/	Left	020	238AA.114CP.020	216	3385A.100CP.020	4385A.114.020
with Seat	3.8	Right	020	238AA.115CP.020	216	3385A.100CP.020	4385A.115.020

See pages 216-217 for product details and pricing.

*Based on usage of 12 flushes per day. LYSOL® is used under license to American Standard.

American Standard



Green Builder's

Sustainability Awards





Toilets

ActiClean[®] Self-Cleaning Toilet

Cleaning system hidden inside tank has both quick and deep clean cycle options for cleaning the bowl






ActiClean Toilet Complete 714AA.154.020 (includes tank, bowl, seat, one cleaning cartridge, and wax ring)


Cleaning Cartridge 1466.006L

- · Self-Cleaning toilet that cleans and removes stains with a simple press of a button Two Cleaning Cycles: Deep Clean (10 minute) and Quick Clean (1 minute) Comes with 9 week supply of cleaning solution*
- 12" (305 mm) rough-in, Right Height[®] elongated, high efficiency (1.28 gpf/4.8 Lpf), WaterSense® listed toilet obtains best 1,000 g MaP flush score[†]
- Triple Power Cleaning Action. Features VorMax® Jetted Scrub, Cleaning Power and Smooth CleanCurve[®] Rim
- VorMax[®] Flush Technology helps maintain a tidy bowl in between ActiClean cleanings. VorMax flush has proven to Clean 2X Better than conventional toilets[‡]
- Battery Operated Cleaning System: 4 AA batteries (included) gives you up to one year of battery life
- · Includes easy lift-off, slow-close seat with sanitary tab

VorMax® Flush Technology









Removable Cleaning

Triple Power Cleaning Action



Easy Lift-Off. Slow-Close Seat

2018 AWARDS

Building Design+Construction

Top 101 Products Award

2017 AWARDS

GOOD DESIGN Award GREEN GOOD DESIGN Award

Beautiful Kitchens & Baths: **30 Most Innovative Products** Award

2016 AWARDS

2017 STEVIE 👻

All AMERICAN SUSINESS AWARD: POP.

PRODUCTS

3rd Place

DPHA 2017 Product

Honorable Mention

KBCULTURE

AWARDS2016

A'Design Award

American Business Awards Stevie Award

Parade of Products (POP) @ PCBC

Best of KBIS Awards

R&D 100 Awards

Connecticut Cottages & Gardens Innovation in

Design Awards

DPHA

Product of the Year

Awards

KBCULTURE Awards



* The cleaning solution will last up to 9 weeks, based on two weekly cleanings: one quick and one deep.

See page 215 for product details and pricing.

† Maximum Performance (MaP) testing performed by IAPMO R&T Lab. MaP Report conducted by Gauley Associates Ltd. and Koeller and Company. \$ Source: Test Report No. 109-141486-002, comparing VorMax against conventional under-the-rim-water-dispersal toilets from major retailers.

American Standard

		Tis git faits	And the second sec		
	BEST	BEST	BETTER	BETTER	GOOD
Product Description	VorMax [®] 12" R, RH EL HET Combo 238AA.104: 3385A.101 Bowl + 4385A.104 Tank	Champion® PRO 12" R, RH EL HET Combo 211AA.104: 3195A.101 Bowl + 4225A.104 Tank	Cadet [®] PRO 12" R, RH EL HET Combo 215AA.104: 3517A.101 Bowl + 4188A.104 Tank	Edgemere ® 12" R, RH EL HET Combo 204AA.104: 3519A.101 Bowl + 4519A.104 Tank	Colony [®] 12" R, RH EL HET Combo 221AA.104: 3251A.101 Bowl + 4192A.104 Tank
Available Flush Volumes	1.0 gpf/3.8 Lpf or 1.28 gpf/4.8 Lpf	1.28 gpf/4.8 Lpf or 1.6 gpf/6.0 Lpf	1.28 gpf/4.8 Lpf or 1.6 gpf/6.0 Lpf	1.28 gpf/4.8 Lpf or dual flush 1.1/1.6 gpf; 4.2/6.0 Lpf	1.28 gpf/4.8 Lpf or 1.6 gpf/6.0 Lpf
Available Bowl Types	RHEL	RH EL, RH RF, EL	RH EL, Compact RH EL, RH RF, EL, RF	RH EL, RH RF	RH EL, EL, RF
Available Rough-in	12" (305 mm)	12" (305 mm)	10", 12" or 14" (254, 305 or 356 mm)	10" or 12" (254 or 305 mm)	10" or 12" (254 or 305 mm)
Flush Valve	1-3/4" (44 mm) Dual Injectors	4" (102 mm) Largest Available	3" (76 mm)	3" (76 mm)	2" (51 mm)
Siphon Outlet	B 2-1/16" (52 mm)	2-3/8" (60 mm) Largest Siphonic Available	2-1/8" (54 mm)	2" (51 mm)	2" (51 mm)
Bowl Hydraulics	 CleanCurve[®] with 2X Better Bowl Cleaning¹ 	PowerWash®	Power Wash	PowerWash	PowerWash
MaP Flush Score*	* Best 1,000 g	Best 1,000 g	Best 1,000 g	Best 1,000 g	600-800 g
Surface	EverClean®	EverClean	EverClean	EverClean	Standard
Warranty	Longest 10-Year Limited Warranty	Longest 10-Year Limited Warranty	5-Year Limited Warranty	5-Year Limited Warranty	2-Year Limited Warranty
RH =Right Height*, EL =I *Maximum Performanc the growth of stain and	RH=Right Height [*] , EL=Elongated, RF=Round Front PMaximum Performance (MaP) testing performed by (APMO R&T Lab. MaP Report conducted by Gauley Associates Ltd. and Koeller and Company. ⁺ EverClean ⁺ is an antimicrobial additive that inhibits the growth of stain and odor causing bacteria, mold and mildew on the surface. ⁺ Source: Test Report No. 109-141486-002, comparing VorMax against conventional under-the-tim-water-dispersal toilets from major retailers.	Report conducted by Gauley Associates Ltd. and Mace. 1 Source: Test Report No. 109-141486-002, cc	oeller and Company. + Ever Clean* is an antimic mering VorMax against conventional under-th	obial additive that inhibits ≻rim-water-dispersal toilets from major retailers	

American Standard Two-Piece Toilets

American Standard

Toilets

H₂Option[®] – MaP premium Ultra High Efficiency Toilets





Style

Stand out style that fits in life today and will stay looking good for years to come, leaving your bathroom always looking its best.

ADA trip levers (7381910-200.0020A right-hand, 7381910-201.0020A left-hand) and top actuator (7381092-200.0020A) versions available. Recommend Easy-Lift and Clean, slow-close, elongated (5257A.65C) and round front (5259B.65C) seats (sold separately).

Technology

Innovation that makes life easier and more enjoyable by solving the little and not so little problems of everyday living.

EverClean® Surface: included at no extra cost

PowerWash® Rim: Siphon jet bowl technology with PowerWash Rim provides optimal performance

Performance

Beauty you can see and feel inside and out that comes from our use of long-lasting, solid materials and our flawless attention to details that create dependable performance for life.

Highest water efficient, gravity flush toilets available - Maximum water savings

Ultra-High Efficiency Toilets (UHETs) meet EPA WaterSense® and MaP PREMIUM criteria* Choose between full flush (1.28 gpf) for solids or partial flush (0.92 gpf) for liquids 12" rough-in configurations with fully glazed 2" trapways

Bowl Height	Bowl Type	Actuator	Tank Type	UHET Combo Less S	Seat	Bowl	Tank	Color
		Left	Unlined	2886204	ADA	3705216	4133A204	020
16-1/2" Elong:	Elongated	Right	Unlined	2886205	ADA	3705216	4133A205	020
	Elongated	Тор	Unlined	2886218		3705216	4133A218	020, 021, 222
		Тор	Lined	2886518		3705216	4133A518	020, 021, 222
	Flangated	Тор	Unlined	2887218		3706216	4133A218	020, 021, 222
15"	Elongated	Тор	Lined	2887518		3706216	4133A518	020, 021, 222
10	Round	Тор	Unlined	2889218		3708216	4133A218	020, 021, 222
	Front	Тор	Lined	2889518		3708216	4133A518	020, 021, 222

See pages 235-238 for product details and pricing.

*MaP testing performed by IAPMO R&T Lab. MaP report conducted by Gauley Associates Ltd. and Koeller and Company.











VorMax[®] Technology Toilets Top to bottom cleaning – Virtually effortless

Getting your toilet clean is one of the nastiest jobs, especially those dirty hard-to-reach spots under the toilet bowl rim. The revolutionary design of the VorMax toilets help keep the whole bowl so much tidier, it makes top to bottom cleaning virtually effortless!

Townsend® VorMax

- One-Piece Townsend VorMax
- 1.28 gpf/4.8 Lpf HET
- Available in White and Linen
- Includes slow-close seat
- Design coordinates with Townsend suite of faucets and fixtures

See page 205.



Outstanding Features and Benefits!


1. CleanCurve® Rim Design

Unique rim design eliminates hidden, hard to reach surfaces where dirt and build-up hide.



2. VorMax Flushing Action

Delivers a powerful jet of water that completely scrubs the bowl clean from top to bottom, eliminating everything in its path.



3. EverClean® Surface

Toilet surface is over 2X smoother than ordinary toilet surfaces, thus eliminating dirt from sticking and staining. EverClean is an antimicrobial additive that inhibit the growth of stain and odor causing bacteria, mold and mildew on the surface.



4. Obtains Best 1,000 g MaP Flush Score at both 1.0 gpf/3.8 Lpf and 1.28 gpf/4.8 Lpf volume[†]

*Source: Test Report No. 109-141486-002, comparing VorMax against conventional under-the-rim-water-dispersal toilets from major retailers. †MaP testing performed by IAPMO R&T Lab. MaP report conducted by Gauley Associates Ltd. and Koeller and Company.

VorMax HET/UHET

- Two-Piece VorMax HET/UHET
- 1.28 gpf/4.8 Lpf HET or 1.0 gpf/3.8 Lpf MaP PREMIUM UHET option
- Available in White, Bone and Linen
- Transitional styling coordinates with many different faucets and fixtures

See pages 218-219.

Heritage[®] VorMax

When used with 1.0 gpf tanks


- Two-Piece Heritage VorMax
- 1.28 gpf/4.8 Lpf HET
- Available in White and Linen
- Design coordinates with Retrospect[®] and Portsmouth[®] faucets and fixtures

See page 220.



merican Standard

Toilets

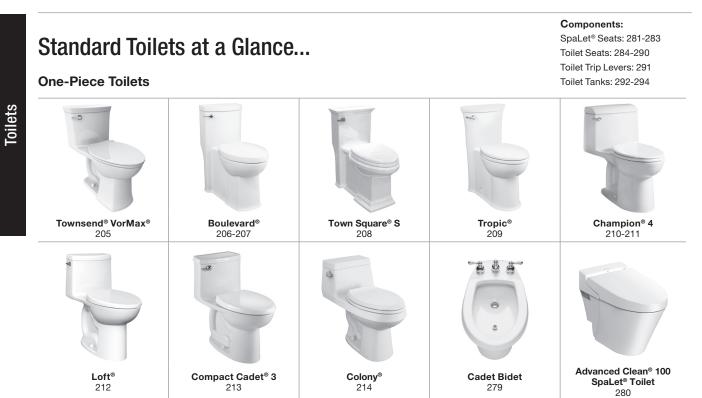

279

Two-Piece Toilets

212

213

T	~	2 Contraction of the second se	T		-
ActiClean [®] 215	VorMax Plus UHET/HET 216-217	VorMax UHET/HET 218-219	Heritage [®] VorMax 220	Town Square S 221-222	Portsmouth® Champion PRO 223-224
*	The second se	P		7	
Retrospect® Champion PRO 225-226	Champion PRO 227-232	Studio Dual Flush 234	H₂Option [®] Dual Flush 235-238	H₂Optimum® 239-240	Concealed Trap Cadet 3 241-242
Triangle Cadet PRO 243-244	Cadet PRO 245-260	Edgemere [®] Dual Flush 261-262	Edgemere® 263-266	Colony® 267-278	

American Standard

Dne-Piece Toilets /itreous China	DESCRIPTION					
	Townsend VorMax – Right Height® Image: CEO Elongated – One-Piece Toilets With Seat Image: CEO • VorMax flushing technology cleans two times better than conventional toilets* • 12" (305 mm) rough-in • Right Height elongated siphon action bowl • High efficiency, ultra-low consumption (1.28 gpf/4.8 Lpf), utilizes 20% less water • Meets EPA WaterSense® criteria • EverClean® Antimicrobial Surface • CleanCurve® rim eliminates rim area where dirt and build-up hide • 16-1/2" (419 mm) rim height for accessible applications • 2-1/16" (52 mm) trapway • Dual injection flush valves • Includes slow-close seat and cover • Two color-matched bolt caps • 10-year warranty (see full warranty on page 552) • Design coordinates with Townsend suite					
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Pric	
2922A.104	Townsend VorMax – Right Height Elongated – One-Piece Toilet With Seat Nominal Dimensions: • 30-1/8" x 16-7/8" x 30-1/8" (767 x 429 x 765 mm)	107 lbs (48.5 kg)	5.09	020 White 222 Linen	781 976	
2922A.105	• Same as above except with trip lever on right-hand side	107 lbs (48.5 kg)	5.09	020 White	786	
	Separate Components:					
735212-400	Tank cover		0.75	020 White 222 Linen	100 123	
5055A.65C	Elongated slow-close seat and cover with EverClean Antimicrobial Surface	6 lbs (2.7 kg)	0.31	020 White 222 Linen	92 102	
⊳ 7381735-200.XXX0A	LH trip lever (specify finish) – Chrome supplied	0.29 lbs (0.13 kg)	0.03	002 Polished Chrome 013 Polished Nickel 278 Legacy Bronze 295 Brushed Nickel	68 64 91 73	
⊳ 7381800-200.XXX0A	RH trip lever	0.26 lbs (0.12 kg)	0.02	002 Polished Chrome	68	

 \dot{ADA} When installed with provided seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

*Source: Test Report No. 109-141486-002, comparing VorMax against conventional under-the-rim-water-dispersal toilets from major retailers. > Parts Program (Non-Premier)

American Standard

High Efficiency (1.6 gpf/6.0 Lpf) Full Flush and (1.1 gpf/4.2 Lpf) Conserving Flush Toilet

One-Piece Toilets Vitreous China	DE	SCRIPTION			
	 Boulevard – Siphonic Dual Flush Right One-Piece Toilet With Seat LXP® (Luxury Performance) toilet 12" (305 mm) rough-in Right Height elongated siphon action dual flu High efficiency, low consumption, full flush (1 (1.1 gpf/4.2 Lpf), utilizes 31% less water Meets EPA WaterSense® criteria EverClean® Antimicrobial Surface PowerWash® rim scrubs bowl with each flush 16-1/2" (419 mm) rim height 2" (51 mm) flush valve 9" x 8" (229 x 203 mm) water surface area Includes slow-close seat and cover with cond for simple removal and reattachment for clean Chrome plated top-mounted push button act Two color-matched bolt hole covers 10-year warranty (see full warranty on page 5 Design coordinates with Studio® and Bouleval 	sh bowl with .6 gpf/6.0 L cealed seat r ning uator 52)	n smooth of) or cor	-sided, concealed trapway) (CEO
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE
2891.200	Boulevard – Siphonic Dual Flush Right Height Elongated One-Piece Toilet With Seat Nominal Dimensions: • 29-3/4" x 14-1/2" x 30-1/2" (756 x 368 x 775 mm)	107 lbs (48.5 kg)	5.10	020 White	1,066
	Separate Components:				
735169-400	Tank cover		0.40	020 White	102
5025A.65G	Elongated toilet seat and cover complete with top-mounting hardware	5 lbs (2.3 kg)	0.23	020 White	112
⊳ 7381203-200.XXX0A	Rectangular top-of-tank push button actuator (specify finish) – Chrome supplied	0.17 lbs (0.08 kg)	0.03	002 Polished Chrome 295 Brushed Nickel 243 Matte Black	13 95 115

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

One-Piece Toilets

e-Piece Toilets reous China	D	ESCRIPTION			
	Boulevard - Right Height® - Elongated One-Piece Toilets With Seat Image: CE • LXP® (Luxury Performance) toilet • 12" (305 mm) rough-in • Right Height elongated siphon action bowl with smooth-sided, concealed trapway • High efficiency, ultra-low consumption (1.28 gpf/4.8 Lpf), utilizes 20% less water • Meets EPA WaterSense® criteria • EverClean® Antimicrobial Surface • PowerWash® rim scrubs bowl with each flush • 16-1/2" (419 mm) rim height for accessible applications • 2" (51 mm) trapway • 3" (76 mm) flush valve • Includes slow-close seat and cover with concealed seat ring and easy lift-off feature for simple removal and reattachment for cleaning • Two color-matched bolt hole covers • 10-year warranty (see full warranty on page 552) • Design coordinates with Studio® and Boulevard lavatories				
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Prici
2891.128	Boulevard – Right Height – Elongated One-Piece Toilet With Seat Nominal Dimensions: • 29-3/4" x 14-1/2" x 30-1/2" (756 x 368 x 775 mm)	105 lbs (47.6 kg)	5.10	020 White 222 Linen	974 1,21
2891.813	 Same as above except with trip lever on right-hand side 	105 lbs (47.6 kg)	5.10	020 White	979
	Separate Components:				
735148-400	Tank cover		0.10	020 White 222 Linen	105 131
5025A.65G	Elongated toilet seat and cover complete with top-mounting hardware	5 lbs (2.3 kg)	0.23	020 White	112
⊳ 7381064-XXX0A	LH trip lever (specify finish) – Chrome supplied	0.59 lbs (0.27 kg)	0.02	002 Polished Chrome 224 ORB 295 Brushed Nickel 243 Matte Black	41 99 58 72
⊳ 7381847-200.XXX0A	RH trip lever	0.22 lbs (0.10 kg)	0.02	002 Polished Chrome 295 Brushed Nickel	46 77

ADA When installed with provided seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

ORB (Oil Rubbed Bronze) > Parts Program (Non-Premier)

One-Piece Toilets

American Standard

One-Piece Toilets Vitreous China	DE	SCRIPTION	I		
	 Town Square S - Right Height[®] - Elongated One-Piece Toilets With Seat LXP[®] (Luxury Performance) toilet 12" (305 mm) rough-in Right Height elongated siphon action bowl with smooth-sided, concealed trapway High efficiency, ultra-low consumption (1.28 gpf/4.8 Lpf), utilizes 20% less water Meets EPA WaterSense[®] criteria Classic American traditional styling EverClean[®] Antimicrobial Surface PowerWash[®] rim scrubs bowl with each flush 16-1/2" (419 mm) rim height for accessible applications 2" (51 mm) trapway 3" (76 mm) flush valve Chrome trip lever matches Town Square S faucets and accessories Includes slow-close seat and cover with concealed seat ring and easy lift-off feature for simple removal and reattachment for cleaning Two color-matched bolt hole covers 10-year warranty (see full warranty on page 552) Design coordinates with Town Square S suite 				CEG
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE
2851A104	Town Square S – Right Height – Elongated One-Piece Toilet With Seat Nominal Dimensions: • 30-1/4" x 16-1/8" x 30-9/16" (768 x 416 x 776 mm)	105 lbs (47.6 kg)	5.10	020 White 222 Linen	906 1,132
2851A105	• Same as above except with trip lever on right-hand side	105 lbs (47.6 kg)	5.10	020 White	911
	Separate Components:			1	
735226-400	Tank cover (specify color)			020 White 222 Linen	103 128
5020A.65G	Elongated traditional slow-close toilet seat and cover complete with top-mounting hardware	5 lbs (2.3 kg)	0.24	020 White 222 Linen	112 138
⊳7381105-XXX0A	LH trip lever (specify finish) – Chrome supplied	0.71 lbs (0.32 kg)	0.06	002 Polished Chrome 013 Polished Nickel 224 ORB 278 Legacy Bronze 295 Brushed Nickel	37 50 95 62 54
⊳7381020-XXX0A	RH trip lever	0.52 lbs (0.24 kg)	0.01	002 Polished Chrome	37

ADA When installed with provided seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

ORB (Oil Rubbed Bronze) > Parts Program (Non-Premier)

208 List Price Guide 2020

American Standard

Dne-Piece Toilets /itreous China	DE	SCRIPTION			
	Tropic - Right Height® - Elongated One-Piece Toilets With Seat Image: CER • LXP® (Luxury Performance) toilet 12" (305 mm) rough-in • Right Height elongated siphon action bowl with smooth-sided, concealed trapway • High efficiency, ultra-low consumption (1.28 gpf/4.8 Lpf), utilizes 20% less water • Meets EPA WaterSense® criteria • EverClean® Antimicrobial Surface • PowerWash® rim scrubs bowl with each flush • 16-1/2" (419 mm) rim height for accessible applications • 2" (51 mm) trapway • 3" (76 mm) flush valve • Chrome trip lever • Includes slow-close seat and cover with concealed seat ring and easy lift-off feature for simple removal and reattachment for cleaning • Two color-matched bolt hole covers • 10-year warranty (see full warranty on page 552) • Transitional design coordinates with Tropic lavatories and faucets				
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE
2786.128	Tropic – Right Height – Elongated One-Piece Toilet With Seat Nominal Dimensions: • 29-3/4" x 16-3/4" x 30-1/2" (756 x 425 x 775 mm)	98 lbs (44.4 kg)	5.56	020 White 222 Linen	974 1,217
2786.813	 Same as above except with trip lever on right-hand side 	105 lbs (47.6 kg)	5.56	020 White	979
	Separate Components:				
735147-400	Tank cover		0.10	020 White 222 Linen	105 131
5024A.65G	Elongated transitional slow-close seat and cover complete with top mounting hardware		0.24	020 White 222 Linen	112 138
⊳7381097-XXX0A	LH trip lever (specify finish) – Chrome supplied	0.22 lbs (0.10 kg)	0.06	002 Polished Chrome 295 Brushed Nickel	46 77
⊳ 7381847-200.XXX0A	RH trip lever	0.22 lbs (0.10 kg)	0.02	002 Polished Chrome 295 Brushed Nickel	46 77
>7381847-200.XXX0A	HH trip lever		0.02		

ADA When installed with provided seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

One-Piece Toilets

American Standard

Low Consumption (1.6 gpf/6.0 Lpf) Toilet

One-Piece Toilets Vitreous China	D	ESCRIPTION			
	Champion 4 – Right Height [®] – Elongated One-Piece Toilet With Seat Right Height elongated siphon action jetted bowl EverClean [®] Antimicrobial Surface Low consumption (1.6 gpf/6.0 Lpf) 4 " (102 mm) piston-action Accelerator [™] flush valve 12" (305 mm) rough-in 2-3/8" (60 mm) fully-glazed trapway 16-1/2" (419 mm) rim height 100% factory flush tested Two color-matched bolt caps Includes color-matched Champion slow-close toilet seat 10-year warranty (see full warranty on page 552)				
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE
2034.314	Champion 4 – Right Height – Elongated One-Piece Toilet With Seat Nominal Dimensions: • 29-3/4" x 17-3/4" x 29-1/2" (756 x 451 x 749 mm)	119 lbs (54 kg)	5.09	020 White 021 Bone 222 Linen	745 931 931
	Separate Components:				
735105-400	Tank cover		0.35	020 White 021 Bone 222 Linen	69 89 89
5321A.65CT*	Champion elongated slow-close toilet seat and cover	5 lbs (2.3 kg)	0.29	020 White 021 Bone 222 Linen	80 89 89
⊳738772-XXX0A	LH trip lever (specify finish) – Chrome supplied	0.25 lbs (0.11 kg)		002 Polished Chrome 020 White 099 Polished Brass 295 Brushed Nickel	24 39 38 39

ADA When installed with provided seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

 \diamond Check your local codes to determine if 1.6 gpf/6.0 Lpf toilets are allowed in your area.

Parts Program (Non-Premier) *Non-Premier Product

One-Piece Toilets

American Standard

Low Consumption (1.6 gpf/6.0 Lpf) Toilet

One-Piece Toilets Vitreous China	DE	SCRIPTION	l		
	Champion 4 – Elongated One-Piece Toilet With Seat • Elongated siphon action jetted bowl • EverClean® Antimicrobial Surface • Low consumption (1.6 gpf/6.0 Lpf) • 4" (102 mm) piston-action Accelerator™ flush valve • 12" (305 mm) rough-in • 2-3/8" (60 mm) fully-glazed trapway • 15" (381 mm) rim height • 100% factory flush tested • Two color-matched bolt caps • Includes color-matched Champion slow-close toilet seat • 10-year warranty (see full warranty on page 552)				
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price
2004.314	Champion 4 – Elongated One-Piece Toilet With Seat Nominal Dimensions: • 29-3/4" x 17-3/4" x 28-1/8" (756 x 451 x 714 mm)	117 lbs (53 kg)	5.09	020 White	686
	Separate Components:				
735105-400	Tank cover		0.35	020 White	69
5321A.65CT*	Champion elongated slow-close lift-off seat with EverClean	4 lbs (1.7 kg)	0.29	020 White	80
⊳738772-XXXOA	LH trip lever (specify finish) – Chrome supplied	0.25 lbs (0.11 kg)		002 Polished Chrome 020 White 099 Polished Brass 295 Brushed Nickel	24 39 38 39

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

 \diamond Check your local codes to determine if 1.6 gpf/6.0 Lpf toilets are allowed in your area.

▷ Parts Program (Non-Premier)

* Non-Premier Product

One-Piece Toilets

List Price Guide 2020

American Standard

One-Piece Toilets Vitreous China	DE	SCRIPTION				
	Loft – Right Height [®] – Elongated One-Piece Toilet With Seat				СЕС	
	 Right Height elongated bowl Space saving compact design with side trip lever 12" (305 mm) rough-in High efficiency, ultra-low consumption (1.28 gpf/4.8 Lpf), utilizes 20% less water Meets EPA WaterSense® criteria 16-1/2" (419 mm) bowl rim height for accessible application EverClean® Antimicrobial Surface Includes color-matched and design-matched solid plastic telescoping toilet seat and cover with slow-close hinges and EverClean Surface 3" (76 mm) flush valve 9" x 8" (229 x 203 mm) water surface area 2-1/8" (54 mm) trapway Two color-matched bolt caps Five-year warranty (see full warranty on page 553) 					
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE	
2535.128	Loft – Right Height – Elongated One-Piece Toilet With Seat Nominal Dimensions: • 28-7/16" x 14-7/16" x 28-5/8" (723 x 366 x 727 mm)	92 lbs (41.7 kg)	3.82	020 White	666	
	Separate Components:					
735182-400	Tank cover		0.35	020 White	104	
5359A.051T	Elongated, telescoping, slow-close seat and cover with EverClean Antimicrobial Surface	4.08 lbs (1.85 kg)	0.24	020 White	80	
⊳ 7381286-200.XXX0A	Trip lever	0.24 lbs (0.11 kg)		002 Polished Chrome	27	

ADA When installed with provided seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

One-Piece Toilets

American Standard

One-Piece Toilets Vitreous China	DESCRIPTION						
	 Compact Cadet 3 - FloWise® - Right Height® - Elongated One-Piece Toilets With Seat Right Height elongated bowl Space saving compact elongated bowl fits in the space of a round front 12" (305 mm) rough-in High efficiency, ultra-low consumption (1.28 gpf/4.8 Lpf), utilizes 20% less water Meets EPA WaterSense® criteria 16-1/2" (419 mm) bowl rim height for accessible application EverClean® Antimicrobial Surface Includes color-matched and design-matched solid plastic toilet seat and cover with slow-close hinges and EverClean Surface Seat features unique sanitary seat lift tab 3" (76 mm) flush valve 9" x 8" (229 x 203 mm) water surface area 2-1/8" (54 mm) trapway Two color-matched bolt caps Five-year warranty (see full warranty on page 553) 						
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE		
2403.128	Compact Cadet 3 - FloWise One-Piece Toilet With Seat Nominal Dimensions: • 28-1/2" x 15-1/2" x 28-1/2" (724 x 394 x 724 mm)	92 lbs (41.7 kg)	3.82	020 White 021 Bone 222 Linen	525 656 656		
2403.813	Same as above except with trip lever on right-hand side	92 lbs (41.7 kg)	3.82	020 White	584		
	Separate Components:			1			
735125-400	Tank cover		0.35	020 White 021 Bone 222 Linen	113 141 141		
5350.110	Cadet [®] 3 elongated slow-close seat and cover with EverClean Antimicrobial Surface	6 lbs (2.7 kg)	0.20	020 White 021 Bone 222 Linen	69 79 79		
⊳ 738903-XXX0A	LH trip lever (specify finish) – Chrome supplied	0.07 lbs (0.03 kg)	0.01	002 Polished Chrome 020 White 222 Linen 243 Matte Black 295 Brushed Nickel	21 34 40 87 30		
⊳738919-XXX0A	RH trip lever	0.07 lbs (0.03 kg)	0.01	002 Polished Chrome	21		

ADA When installed with provided seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

American Standard

One-Piece Toilets /itreous China	DE	SCRIPTION				
	Colony – Right Height [®] – Elongated One-Piece Toilet With Seat			AND	CEC	
	 Right Height elongated bowl 12" (305 mm) rough-in High efficiency, ultra-low consumption (1.28 gpf/4.8 Lpf), utilizes 20% less water Meets EPA WaterSense® criteria 16-1/2" (419 mm) bowl rim height for accessible application Includes slow-close seat and cover 3" (76 mm) flush valve 9" x 8" (229 x 203 mm) water surface area 2" (51 mm) trapway Chrome plated trip lever Two color-matched bolt caps Two-year warranty (see full warranty on page 553) 					
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price	
2961A104SC	Colony – Right Height – Elongated	84 lbs	4.58	020 White	426	
	One-Piece Toilet With Seat Nominal Dimensions: • 29-15/16" x 16-3/8" x 26-3/16" (760 x 416 x 665 mm)	(38 kg)				
	Nominal Dimensions: • 29-15/16" x 16-3/8" x 26-3/16"	(38 Kg)				
735228-400	Nominal Dimensions: • 29-15/16" x 16-3/8" x 26-3/16" (760 x 416 x 665 mm)	(38 Kg)	0.34	020 White	62	
735228-400 5257A.65MT	Nominal Dimensions: • 29-15/16" x 16-3/8" x 26-3/16" (760 x 416 x 665 mm) Separate Component:	(38 Kg)	0.34	020 White 020 White	62	

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

One-Piece Toilets

vo-Piece Toilets treous China	DESCRIPTION						
	ActiClean – Right Height [®]			(sterser		
	Elongated Toilet With Seat			(;	CE 🕄		
	 Self-cleaning toilet that cleans and removes 	stains with a			Contract by PROTECT		
	simple press of a button			ActiClean AWA	RDS		
	Toilet-To-Go [®] (TTG) shipped in single cartor True hourd cleaning surface	ו					
	 Two bowl cleaning cycles: – Quick Clean is best used for regular upkee 	n in hetween			age 200 fo		
	deep cleanings. A Quick Clean cycle will c			2016 AWARDS com	plete listing		
	of the toilet bowl in just one minute						
	- Deep Clean complete and thoroughly clea			ling aloop houd			
	 the toilet bowl in 10 minutes. The result is a Battery operated cleaning system: 4AA batter 				terv life		
	• 12" (305 mm) rough-in		a) gire j		,		
	Right Height elongated siphon action bowl						
Carl I	 High Efficiency Toilet (HET), 1.28 gpf/4.8 Lpt Meets EPA WaterSense[®] criteria 	f, utilizes 20%	less wa	ter			
	EverClean [®] Antimicrobial Surface						
	CleanCurve [®] rim eliminates rim area where of the second se	dirt and build-	up hide				
	• 16-1/2" (419 mm) rim height for accessible a	applications					
	 2-1/16" (52 mm) trapway Dual injection flush valves 						
	 Dual injection flush valves Two color-matched bolt caps and slow-clos 	e seat includ	ed				
	 10-year warranty (see full warranty on page 552) 						
	 Includes one 1466.006L cleaning cartridge and wax ring 						
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE		
714AA.154	ActiClean – Right Height Elongated Toilet With Seat			020 White	632		
	Nominal Dimensions (with Lid CLOSED):						
	 30-3/16" x 20-11/16" x 31-3/8" (767 x 526 x 797 mm) 						
	Nominal Dimensions (with Lid OPEN):						
	• 30-3/16" x 20-11/16" x 40"						
	(767 x 526 x 1016 mm)						
	Separate Components:						
5055A.65C	Elongated slow-close seat and cover with	6 lbs	0.31	020 White	92		
	EverClean Antimicrobial Surface	(2.7 kg)					
⊳7381556-400.XXX0A	LH trip lever (specify finish)	0.42 lbs		002 Polished Chrom	e 64		
	- Chrome supplied	(0.19 kg)		295 Brushed Nickel	90		
ISR (MAP) 1466.006L*	ActiClean cleaning cartridge		0.03		15		
When installed with provide	Activitian cleaning calindye		0.00				

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

▷ Parts Program (Non-Premier) *Non-Premier Product

Two-Piece Toilets

American Standard

Ultra-High Efficiency (1.0 gpf/3.8 Lpf) Toilets

Two-Piece To Vitreous Chir		DESCRIPTION						
		 VorMax Plus UHET - Right Height® Elongated Toilets With Seat Automatic self-cleaning VorMax toilet bowl that freshens the bowl with every flush The specially formulated VorMax Plus FreshInfuser® features the cleaning power of LYSOL* and lasts up to 30 days[†] The VorMax jetted scrub plus the cleaning power of LYSOL work together to keep the bowl clean and smelling fresh Two VorMax Plus FreshInfuser packs included with purchase of toilet Cleaning compartment is seamlessly hidden and easy to access Slow-close, quick release seat included for easy cleaning VorMax flushing technology cleans two times better than conventional toilets[‡] Combination bowl with seat plus tank 12" (305 mm) rough-in Right Height elongated siphon action bowl Meets EPA WaterSense® and MaP Premium criteria 	 EverCle Transitic CleanCu area wh 16-1/2" for acce 2-1/16" Dual inje Chrome Two col 10-year 	an® Antir onal stylii urve® rim ere dirt a (419 mm ssible ap (52 mm) ection flu trip leve or-match	2018 AWARDS complete ncy toilet (UHET) 1.0 gpf/ nicrobial Surface ng eliminates rim ind build-up hide b) rim height oplications trapway sh valves r hed bolt caps r (see full	ge 199 for a lete listing.		
		PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE		
VorMax Plus FreshInfuser Detail	238AA.114CP	VorMax Plus UHET – Right Height Elongated Toilet With Seat Nominal Dimensions: • 30-3/16" x 17-7/8" x 32-1/4" (767 x 453 x 820 mm)			020 White	556		
	238AA.115CP	• Same as above except with trip lever on right-hand side			020 White	561		
		Separate Components:						
	3385A.100CP	Right Height elongated bowl with two color-matched bolt caps and VorMax Plus seat with two FreshInfusers	84 lbs (38 kg)	2.11	020 White	339		
	4385A.114	1.0 gpf/3.8 Lpf tank complete with coupling components and tank trim	28 lbs (12.7 kg)	0.91	020 White	217		
	4385A.115	1.0 gpf/3.8 Lpf tank complete with coupling components and tank trim and right-hand trip lever	28 lbs (12.7 kg)	0.91	020 White	222		
	735216-400	Tank cover		0.75	020 White	100		
⊳7:	381740-200.XXX0A	LH trip lever (specify finish) – Chrome supplied	0.26 lbs (0.18 kg)	0.03	002 Polished Chrome 013 Polished Nickel 278 Legacy Bronze 295 Brushed Nickel	62 68 91 73		
⊳7:	381799-200.XXX0A	RH trip lever	0.26 lbs (0.18 kg)	0.02	002 Polished Chrome	62		
	1610.001§	VorMax Plus FreshInfuser single pack		0.02		6		

ÁDÀ When installed with provided seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

 $^{*}\text{LYSOL}^{\otimes}$ is used under license to American Standard. $~^{\dagger}\text{Based}$ on a usage of 12 flushes per day.

▷ Parts Program (Non-Premier) §Non-Premier Product *Source: Labs Test Report No. 109-141486-002, comparing VorMax against conventional under-the-rim-water-dispersal toilets from major retailers.

Two-Piece Toilets

American Standard

eous China	DESCRIPTION						
	VorMax Plus HET – Right Height [®] Elongated Toilets With Seat						
*	 Automatic self-cleaning VorMax toilet bowl th the bowl with every flush The specially formulated VorMax Plus Freshl the cleaning power of LYSOL* and lasts up to The VorMax jetted scrub plus the cleaning power kogether to keep the bowl clean and sm Two VorMax Plus Freshlnfuser packs include purchase of toilet 	nfuser [®] featu o 30 days [†] ower of LYSC nelling fresh			RDS ge 199 fo ete listin		
	 Cleaning compartment is seamlessly hidden Slow-close, quick release seat included for e VorMax flushing technology cleans two times Combination bowl with seat plus tank 12" (305 mm) rough-in Right Height elongated siphon action bowl High efficiency toilet (HET) 1.28 gpf/4.8 Lpf Meets EPA WaterSense® EverClean® Antimicrobial Surface Transitional styling CleanCurve® rim eliminates rim area where d 16-1/2" (419 mm) rim height for accessible a 2-1/16" (52 mm) trapway Dual injection flush valves Chrome trip lever Two color-matched bolt caps 10-year warranty (see full warranty on page 5 	easy cleaning s better than lirt and build- pplications	convent	ional toilets [‡]	Eyst		
VorMax Plus FreshInfuser	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Prici		
Detail 238AA.104CP	VorMax Plus HET – Right Height Elongated Toilet With Seat Nominal Dimensions: • 30-3/16" x 17-7/8" x 32-1/4" (767 x 453 x 820 mm)			020 White	556		
238AA.105CP	Same as above except with trip lever on right-hand side			020 White	561		
238AA.105CP	Same as above except with trip lever on			020 White	561		
238AA.105CP 3385A.100CP	Same as above except with trip lever on right-hand side	84 lbs (38 kg)	2.11	020 White 020 White			
	Same as above except with trip lever on right-hand side Separate Components: Right Height elongated bowl with two color-matched bolt caps and VorMax Plus		2.11 0.91		339		
3385A.100CP	Same as above except with trip lever on right-hand side Separate Components: Right Height elongated bowl with two color-matched bolt caps and VorMax Plus seat with two FreshInfusers 1.28 gpf/4.8 Lpf tank complete with coupling	(38 kg) 28 lbs		020 White	339		
3385A.100CP 4385A.104	 Same as above except with trip lever on right-hand side Separate Components: Right Height elongated bowl with two color-matched bolt caps and VorMax Plus seat with two FreshInfusers 1.28 gpf/4.8 Lpf tank complete with coupling components and tank trim 1.28 gpf/4.8 Lpf tank complete with coupling components and tank trim 	(38 kg) 28 lbs (12.7 kg) 28 lbs	0.91	020 White 020 White	339 217 222		
3385A.100CP 4385A.104 4385A.105	 Same as above except with trip lever on right-hand side Separate Components: Right Height elongated bowl with two color-matched bolt caps and VorMax Plus seat with two FreshInfusers 1.28 gpf/4.8 Lpf tank complete with coupling components and tank trim 1.28 gpf/4.8 Lpf tank complete with coupling components and tank trim and right-hand trip lever 	(38 kg) 28 lbs (12.7 kg) 28 lbs	0.91	020 White 020 White 020 White	339 217 222 100 62		
3385A.100CP 4385A.104 4385A.105 735216-400	 Same as above except with trip lever on right-hand side Separate Components: Right Height elongated bowl with two color-matched bolt caps and VorMax Plus seat with two FreshInfusers 1.28 gpf/4.8 Lpf tank complete with coupling components and tank trim 1.28 gpf/4.8 Lpf tank complete with coupling components and tank trim and right-hand trip lever Tank cover LH trip lever (specify finish) 	(38 kg) 28 lbs (12.7 kg) 28 lbs (12.7 kg) 0.26 lbs	0.91 0.91 0.75	020 White 020 White 020 White 020 White 020 White 020 Polished Chrome 013 Polished Nickel 278 Legacy Bronze	339 217 222 100 62 68 91		

 \dot{ADA} When installed with provided seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements. *LYSOL® is used under license to American Standard. [†]Based on a usage of 12 flushes per day. [‡]Source: Labs Test Report No. 109-141486-002, comparing VorMax against conventional under-the-rim-water-dispersal toilets from major retailers.

American Standard

0

▷ Parts Program (Non-Premier) [§]Non-Premier Product



Ultra-High Efficiency (1.0 gpf/3.8 Lpf) Toilets

Two-Piece Toilets DESCRIPTION **Vitreous China** VorMax UHET - Right Height® CEO **Elongated Toilets Less Seat** · VorMax flushing technology cleans two times better than conventional toilets* · Combination bowl and tank, less seat • 12" (305 mm) rough-in Right Height elongated siphon action bowl • Ultra-high efficiency toilet (UHET) 1.0 gpf/3.8 Lpf • Meets EPA WaterSense® and MaP Premium criteria • EverClean® Antimicrobial Surface Transitional styling • CleanCurve® rim eliminates rim area where dirt and build-up hide • 16-1/2" (419 mm) rim height for accessible applications • 2-1/16" (52 mm) trapway · Dual injection flush valves Chrome trip lever Two color-matched bolt caps • 10-year warranty (see full warranty on page 552) NET LIST PRODUCT PTS COLORS WEIGHT PRICE 238AA.114 VorMax UHET - Right Height 020 White 452 **Elongated Toilet Less Seat Nominal Dimensions:** 30-3/16" x 17-7/8" x 32-1/4" (767 x 453 x 820 mm) 238AA.115 · Same as above except with trip lever on 020 White 457 right-hand side Separate Components: Right Height elongated bowl with two 3385A.101 84 lbs 1.83 020 White 235 color-matched bolt caps (38 kg) 4385A.114 1.0 gpf/3.8 Lpf tank complete with coupling 28 lbs 0.91 020 White 217 components and tank trim (12.7 kg) 4385A.115 1.0 gpf/3.8 Lpf tank complete with coupling 28 lbs 0.91 020 White 222 components and tank trim and right-hand (12.7 kg) trip lever 735216-400 Tank cover 0.75 020 White 100 ▷ 7381740-200.XXX0A LH trip lever (specify finish) 0.26 lbs 0.03 002 Polished Chrome 62 Chrome supplied (0.18 kg) 013 Polished Nickel 68 278 Legacy Bronze 91 295 Brushed Nickel 73 ▷7381799-200.XXX0A RH trip lever 0.26 lbs 0.02 002 Polished Chrome 62 (0.18 kg) **Recommended Seat (sold separately):**



 ${\rm ADA}$ When installed with seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

EverClean Antimicrobial Surface

Elongated slow-close seat and cover with

6 lbs

(2.7 kg)

0.31

020 White

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements. *Source: Test Report No. 109-141486-002, comparing VorMax against conventional under-the-rim-water-dispersal toilets from major retailers.

5055A.65C

▷ Parts Program (Non-Premier)

92



wo-Piece Toilets itreous China	DESCRIPTION						
2	 VorMax HET – Right Height[®] Elongated Toilets Less Seat VorMax flushing technology cleans two times than conventional toilets* Combination bowl and tank, less seat 12" (305 mm) rough-in Right Height elongated siphon action bowl High efficiency toilet (HET) 1.28 gpf/4.8 Lpf Meets EPA WaterSense[®] EverClean[®] Antimicrobial Surface Transitional styling CleanCurve[®] rim eliminates rim area where d 16-1/2" (419 mm) rim height for accessible at 2-1/16" (52 mm) trapway Dual injection flush valves Chrome trip lever Two color-matched bolt caps 10-year warranty (see full warranty on page 5 	irt and build- pplications	up hide				
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE		
238AA.104	VorMax HET – Right Height Elongated Toilet Less Seat Nominal Dimensions: • 30-3/16" x 17-7/8" x 32-1/4" (767 x 453 x 820 mm)			020 White 021 Bone 222 Linen	452 566 566		
238AA.105	Same as above except with trip lever on right-hand side			020 White	457		
	Separate Components:						
3385A.101	Right Height elongated bowl with two color-matched bolt caps	84 lbs (38 kg)	1.83	020 White 021 Bone 222 Linen	235 294 294		
4385A.104	1.28 gpf/4.8 Lpf tank complete with coupling components and tank trim	28 lbs (12.7 kg)	0.91	020 White 021 Bone 222 Linen	217 272 272		
4385A.105	1.28 gpf/4.8 Lpf tank complete with coupling components and tank trim and right-hand trip lever	28 lbs (12.7 kg)	0.91	020 White	222		
735216-400	Tank cover		0.75	020 White 021 Bone 222 Linen	100 123 123		
⊳ 7381740-200.XXX0A	LH trip lever (specify finish) – Chrome supplied	0.26 lbs (0.18 kg)	0.03	002 Polished Chrome 013 Polished Nickel 278 Legacy Bronze 295 Brushed Nickel	62 68 91 73		
⊳ 7381799-200.XXX0A	RH trip lever	0.26 lbs (0.18 kg)	0.02	002 Polished Chrome	62		
	Recommended Seat (sold separately):						
5055A.65C	Elongated slow-close seat and cover with EverClean Antimicrobial Surface	6 lbs (2.7 kg)	0.31	020 White 021 Bone 222 Linen	92 102 102		

ADA When installed with seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements. *Source: Test Report No. 109-141486-002, comparing VorMax against conventional under-the-rim-water-dispersal toilets from major retailers.

American Standard 0

vo-Piece Toilets treous China	DESCRIPTION						
ECCUS CININ	 Heritage VorMax[®] – Right Height[®] Elongated Toilet Less Seat VorMax flushing technology cleans two times conventional toilets* Combination bowl and tank, less seat 12" (305 mm) rough-in Right Height elongated siphon action bowl High efficiency, ultra-low consumption (1.28 meets EPA WaterSense[®] criteria EverClean[®] Antimicrobial Surface Classic American traditional styling CleanCurve[®] rim eliminates rim area where d 16-1/2" (419 mm) rim height for accessible ap 2-1/16" (52 mm) trapway Dual injection flush valves Chrome trip lever Two color-matched bolt caps 10-year warranty (see full warranty on page 5 Design coordinates with Retrospect[®] suite 	gpf/4.8 Lpf), irt and build- oplications	utilizes 2	20% less water			
	PRODUCT	NET WEIGHT	PTS	COLORS	LIS Pri(
205AA.104	Heritage VorMax – Right Height Elongated Toilet Less Seat Nominal Dimensions: • 30-1/4" x 19-3/4" x 30-13/16" (768 x 501 x 782 mm)			020 White 222 Linen	462 579		
	Separate Components:						
3870A.101	Right Height elongated bowl with two color-matched bolt caps	84 lbs (38 kg)	2.12	020 White 222 Linen	23 29		
4270A.104	1.28 gpf/4.8 Lpf tank complete with coupling components and tank trim	28 lbs (12.7 kg)	0.91	020 White 222 Linen	22 28		
735203-410	Tank cover			020 White 222 Linen	10 12		
⊳ 7381459-200.XXX0A	LH trip lever (specify finish) – Chrome supplied	0.44 lbs (0.20 kg)	0.01	002 Polished Chrome 013 Polished Nickel 224 ORB 278 Legacy Bronze 295 Brushed Nickel	64 69 10 96 79		
	Recommended Seats (sold separately):			11			
5350.110 [†]	Elongated slow-close seat and cover with EverClean Antimicrobial Surface	6 lbs (2.7 kg)	0.20	020 White 222 Linen	69 79		
5020A.65G	Elongated traditional slow-close toilet seat and cover complete with top-mounting hardware	5 lbs (2.3 kg)	0.24	020 White 222 Linen	11 13		

ADA When installed with seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

*Source: Test Report No. 109-141486-002, comparing VorMax against conventional under-the-rim-water-dispersal toilets from major retailers. ORB (Oil Rubbed Bronze) > Parts Program (Non-Premier) † Non-Premier Product

American Standard

Two-Piece Toilets

Two-Piece Toilets Vitreous China	DESCRIPTION							
	Town Square S - Concealed Trapway Right Height® - Elongated Toilets With Seat • LXP® (Luxury Performance) toilet • Combination bowl and tank, with seat • 12" (305 mm) rough-in • Right Height elongated siphon action bowl with smooth-sided, concealed trapway • High efficiency, ultra-low consumption (1.28 gpf/4.8 Lpf), utilizes 20% less water • Meets EPA WaterSense® criteria • EverClean® Antimicrobial Surface • Classic American traditional styling • PowerWash® rim scrubs bowl with each flush • 16-1/2" (419 mm) rim height for accessible applications • 2-1/8" (54 mm) trapway • 3" (76 mm) flush valve • Chrome trip lever matches Town Square S faucets and accessories • Includes slow-close seat and cover with concealed seat ring and easy lift-off feature for simple removal and reattachment for cleaning • Two color-matched bolt hole covers • 10-year warranty (see full warranty on page 552) • Design coordinates with Town Square S suite							
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE			
281AA104	Town Square S – Concealed Trapway Right Height – Elongated Toilet With Seat Nominal Dimensions: • 30-1/4" x 16-5/8" x 31" (768 x 422 x 787 mm)			020 White 222 Linen	697 874			
281AA105	Same as above except with trip lever on right-hand side			020 White	702			
	Separate Components:			1				
3851A101	Right Height elongated bowl with 2 color-matched bolt hole covers (Includes 5020A.65G elongated seat and cover)	84 lbs (38 kg)	2.29	020 White 222 Linen	376 471			
4216228	1.28 gpf/4.8 Lpf tank complete with coupling components and tank trim	28 lbs (12.7 kg)	0.91	020 White 222 Linen	321 403			
4216823	Same as above tank except with trip lever on right-hand side	28 lbs (12.7 kg)	0.76	020 White	326			
735219-400	Tank cover		0.10	020 White 222 Linen	103 126			
5020A.65G	Elongated traditional slow-close toilet seat and cover complete with top-mounting hardware	5 lbs (2.3 kg)	0.24	020 White 222 Linen	112 138			
⊳7381105-XXX0A	LH trip lever (specify finish) – Chrome supplied	0.71 lbs (0.32 kg)	0.01	002 Polished Chrome 013 Polished Nickel 224 ORB 278 Legacy Bronze 295 Brushed Nickel	37 50 95 62 54			
⊳ 7381020-XXX0A	RH trip lever	0.52 lbs (0.24 kg)	0.01	002 Polished Chrome	37			

 \dot{ADA} When installed with provided seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

American Standard

Two-Piece Toilets /itreous China	DESCRIPTION							
	Town Square S - Exposed Trapway Image: CEC Right Height® - Elongated Toilets Less Seat Image: CEC LXP® (Luxury Performance) toilet Combination bowl and tank, less seat 12" (305 mm) rough-in Right Height elongated siphon action bowl with exposed trapway High efficiency, ultra-low consumption (1.28 gpf/4.8 Lpf), utilizes 20% less water Meets EPA WaterSense® criteria EverClean® Antimicrobial Surface PowerWash® rim scrubs bowl with each flush 16-1/2" (419 mm) rim height for accessible applications 2-1/8" (54 mm) trapway 3" (76 mm) flush valve Chrome trip lever supplied Includes EZ-Install tools and two color-matched bolt caps 10-year warranty (see full warranty on page 552) Design coordinates with Town Square S suite of fixtures and faucets							
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE			
2917228	Town Square S – Exposed Trapway Right Height – Elongated Toilet Less Seat Nominal Dimensions: • 29-3/4" x 16-5/8" x 31" (756 x 422 x 787 mm)			020 White 222 Linen	559 699			
2917823	Same as above except with trip lever on right-hand side			020 White	564			
	Separate Components:			1				
3271101	Right Height elongated bowl with two color-matched bolt caps	84 lbs (38 kg)	2.11	020 White 222 Linen	238 296			
4216228	1.28 gpf/4.8 Lpf tank complete with coupling components and tank trim	28 lbs (12.7 kg)	0.91	020 White 222 Linen	321 403			
4216823	Same tank as above except with trip lever on right-hand side	28 lbs (12.7 kg)	0.91	020 White	326			
735219-400	Tank cover		0.35	020 White 222 Linen	103 126			
⊳7381105-XXX0A	Trip lever (specify finish) – Chrome supplied	0.71 lbs (0.32 kg)	0.01	002 Polished Chrome 013 Polished Nickel 224 ORB 278 Legacy Bronze 295 Brushed Nickel	37 50 95 62 54			
⊳ 7381020-XXX0A	RH trip lever	0.52 lbs (0.24 kg)	0.01	002 Polished Chrome	37			
	Recommended Seat (sold separately):							
5020A.65G	Elongated traditional slow-close toilet seat and cover complete with top-mounting hardware	5 lbs (2.3 kg)	0.24	020 White 222 Linen	112 138			

 ΔDA When installed with provided seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

American Standard

wo-Piece Toilets treous China	DESCRIPTION						
	Portsmouth Champion PRO Right Height® Toilets Less Seat • Combination bowl and tank, less seat • High efficiency, ultra-low consumption (1.28 g • Meets EPA WaterSense® criteria • Trade specific tank • PowerWash® rim scrubs bowl with each flush • Metal shank fill valve • Includes EZ-Install Tools • EverClean® Antimicrobial Surface • 4" (102 mm) piston-action Accelerator™ flush 2-3/8" (60 mm) fully-glazed trapway • 16-1/2" (419 mm) rim height for accessible ap • 12" (305 mm) rough-in • 10-year warranty (see full warranty on page 50) • Design coordinates with Portsmouth suite of fi	valve pplications 52)		20% less water) CE		
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE		
213AA.104	Portsmouth Champion PRO Right Height – Elongated Toilet Less Seat Nominal Dimensions: • 30-1/4" x 16-5/8" x 31-1/8" (768 x 423 x 791 mm)			020 White 222 Linen	574 716		
213BA.104	Portsmouth Champion PRO Right Height – Round Front Toilet Less Seat Nominal Dimensions: • 28-1/4" x 16-5/8" x 31-1/8" (718 x 423 x 791 mm)			020 White 222 Linen	531 661		
	Separate Components:						
3195A.101	Right Height elongated bowl with two color-matched bolt caps	65 lbs (29 kg)	1.83	020 White 222 Linen	284 354		
3195B.101	Right Height round front bowl with two color-matched bolt caps	62 lbs (28 kg)	1.67	020 White 222 Linen	241 299		
4327A.104	Portsmouth Champion PRO tank complete with coupling components and tank trim	32 lbs (14.5 kg)	0.76	020 White 222 Linen	290 362		
735202-400	Portsmouth Champion PRO tank		0.34	020 White 222 Linen	93 114		
⊳7381406-200.XXX0A	LH trip lever (specify finish) – Chrome supplied	0.74 lbs (0.34 kg)	0.01	002 Polished Chrome 224 ORB 295 Brushed Nickel	39 81 58		
	Recommended Seats (sold separately):	1	1	· · · · · · · · · · · · · · · · · · ·			
5020A.65G	Elongated traditional slow-close toilet seat and cover complete with top-mounting hardware	5 lbs (2.3 kg)	0.24	020 White 222 Linen	112 138		
5321A.65CT	Champion elongated slow-close toilet seat and cover	5 lbs (2.3 kg)	0.29	020 White 222 Linen	80 89		
5320B.65CT	Champion round front slow-close toilet seat	5 lbs	0.23	020 White	67		

 \widehat{ADA} When installed with seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

American Standard

Гwo-Piece Toilets /itreous China	DESCRIPTION						
	Portsmouth Champion PRO Elongated Toilet Less Seat • Combination bowl and tank, less seat • High efficiency, ultra-low consumption (1.28 g • Meets EPA WaterSense® criteria • Trade specific tank • PowerWash® rim scrubs bowl with each flush • Metal trip lever • Metal shank fill valve • Includes EZ-Install Tools • EverClean® Antimicrobial Surface • 4" (102 mm) piston-action Accelerator™ flush • 2-3/8" (60 mm) fully-glazed trapway • 12" (305 mm) rough-in • 10-year warranty (see full warranty on page 58 • Design coordinates with Portsmouth suite of f	valve 52)		20% less water	CEC		
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE		
213CA.104	Portsmouth Champion PRO Elongated Toilet Less Seat Nominal Dimensions: • 30-1/4" x 16-5/8" x 29-3/8" (768 x 423 x 752 mm)			020 White	499		
	Separate Components:			II			
3195C.101	Elongated bowl with two color-matched bolt caps	70 lbs (31.8 kg)	1.83	020 White	209		
4327A.104	Portsmouth Champion PRO tank complete with coupling components and tank trim	32 lbs (14.5 kg)	0.76	020 White	290		
735202-400	Portsmouth Champion PRO tank cover		0.34	020 White	93		
⊳7381406-200.XXX0A	LH trip lever (specify finish) – Chrome supplied	0.74 lbs (0.34 kg)		002 Polished Chrome 224 ORB 295 Brushed Nickel	39 81 58		
	Recommended Seats (sold separately):			11			
5020A.65G	Elongated traditional slow-close toilet seat and cover complete with top-mounting hardware	5 lbs (2.3 kg)	0.24	020 White	112		
5321A.65CT	Champion elongated slow-close toilet seat and cover	5 lbs (2.3 kg)	0.29	020 White	80		

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

ORB (Oil Rubbed Bronze) ▷ Parts Program (Non-Premier)

Two-Piece Toilets

American Standard

Two-Piece Toilets /itreous China	DESCRIPTION						
	Retrospect Champion PRO Right Height® Toilets Less Seat • Combination bowl and tank, less seat • High efficiency, ultra-low consumption (1.28 g • Meets EPA WaterSense® criteria • Trade specific tank • PowerWash® rim scrubs bowl with each flush • Metal trip lever • Metal shank fill valve • Includes EZ-Install Tools • EverClean® Antimicrobial Surface • 4" (102 mm) piston-action Accelerator [™] flush • 2-3/8" (60 mm) fully-glazed trapway • 16-1/2" (419 mm) rim height for accessible ap • 12" (305 mm) rough-in • 10-year warranty (see full warranty on page 53 • Design coordinates with Retrospect consoler	valve pplications 52)			CEC		
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price		
212AA.104	Retrospect Champion PRO Right Height – Elongated Toilet Less Seat Nominal Dimensions: • 30-1/4" x 19-3/4" x 31-1/2" (768 x 501 x 800 mm)			020 White 222 Linen	574 716		
212BA.104	Retrospect Champion PRO Right Height – Round Front Toilet Less Seat Nominal Dimensions: • 28-1/4" x 19-3/4" x 31-1/2" (718 x 501 x 800 mm)			020 White 222 Linen	531 661		
	Separate Components:			1			
3195A.101	Right Height elongated bowl with two color-matched bolt caps	65 lbs (29 kg)	1.83	020 White 222 Linen	284 354		
3195B.101	Right Height round front bowl with two color-matched bolt caps	62 lbs (28 kg)	1.67	020 White 222 Linen	241 299		
4326A.104	Retrospect Champion PRO tank complete with coupling components and tank trim	32 lbs (14.5 kg)	1.00	020 White 222 Linen	290 362		
735201-400	Retrospect Champion PRO tank cover		0.35	020 White 222 Linen	93 116		
⊳7381406-200.XXX0A	LH trip lever (specify finish) – Chrome supplied	0.74 lbs (0.34 kg)		002 Polished Chrome 224 ORB 295 Brushed Nickel	39 81 58		
	Recommended Seats (sold separately):						
5020A.65G	Elongated traditional slow-close toilet seat and cover complete with top-mounting hardware	5 lbs (2.3 kg)	0.24	020 White 222 Linen	112 138		
5321A.65CT	Champion elongated slow-close toilet seat and cover	5 lbs (2.3 kg)	0.29	020 White 222 Linen	80 89		
5320B.65CT	Champion round front slow-close toilet seat and cover	5 lbs (2.3 kg)	0.23	020 White 222 Linen	67 79		
	For other seat options see pages 284-290.						

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

American Standard

Two-Piece Toilets /itreous China	DESCRIPTION						
	Retrospect Champion PRO Elongated Toilet Less Seat • Combination bowl and tank, less seat • High efficiency, ultra-low consumption (1.28 g • Meets EPA WaterSense® criteria • Trade specific tank • PowerWash® rim scrubs bowl with each flush • Metal trip lever • Metal shank fill valve • Includes EZ-Install Tools • EverClean® Antimicrobial Surface • 4" (102 mm) piston-action Accelerator™ flush • 2-3/8" (60 mm) fully-glazed trapway • 12" (305 mm) rough-in • 10-year warranty (see full warranty on page 5 • Design coordinates with Retrospect suite of f	valve 52)		20% less water) CEC		
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE		
212CA.104	Retrospect Champion PRO Elongated Toilet Less Seat Nominal Dimensions: • 30-1/4" x 19-3/4" x 30" (768 x 501 x 762 mm)			020 White	499		
	Separate Components:			1			
3195C.101	Elongated bowl with two color-matched bolt caps	70 lbs (31.8 kg)	1.83	020 White	209		
4326A.104	Retrospect Champion PRO tank complete with coupling components and tank trim	32 lbs (14.5 kg)	1.00	020 White	290		
735201-400	Retrospect Champion PRO tank cover		0.35	020 White	93		
⊳7381406-200.XXX0A	LH trip lever (specify finish) – Chrome supplied	0.74 lbs (0.34 kg)		002 Polished Chrome 224 ORB 295 Brushed Nickel	39 81 58		
	Recommended Seats (sold separately):			1			
5020A.65G	Elongated traditional slow-close toilet seat and cover complete with top-mounting hardware	5 lbs (2.3 kg)	0.24	020 White	112		
5321A.65CT	Champion elongated slow-close toilet seat and cover	5 lbs (2.3 kg)	0.29	020 White	80		
5321A.65CT			0.29	020 White			

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

ORB (Oil Rubbed Bronze) ▷ Parts Program (Non-Premier)

Two-Piece Toilets

American Standard

Гwo-Piece Toilets /itreous China	DESCRIPTION							
	Champion PRO - Right Height® Elongated Toilets Less Seat • Combination bowl and tank, less seat • High efficiency, ultra-low consumption (1.28 gpf/4.8 Lpf), utilizes 20% less water • Meets EPA WaterSense® criteria • Trade specific tank • PowerWash® rim scrubs bowl with each flush • Metal trip lever • Metal trip lever • Metal shank fill valve • Includes EZ-Install Tools • EverClean® Antimicrobial Surface • 4" (102 mm) piston-action Accelerator [™] flush valve • 2-3/8" (60 mm) fully-glazed trapway • 16-1/2" (419 mm) rim height for accessible applications • 12" (305 mm) rough-in • 10-year warranty (see full warranty on page 552)							
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE			
211AA.104	Champion PRO – Right Height Elongated Toilet Less Seat Nominal Dimensions: • 30-1/4" x 19" x 31" (768 x 483 x 787 mm)			020 White 021 Bone 222 Linen	504 628 628			
211AA.105	 Same as above with trip lever on right-hand side 			020 White	509			
	Separate Components:							
3195A.101	Right Height elongated bowl with two color-matched bolt caps	65 lbs (29 kg)	1.83	020 White 021 Bone 222 Linen	284 354 354			
4225A.104	Tank complete with coupling components and tank trim	32 lbs (14.5 kg)	0.76	020 White 021 Bone 222 Linen	220 274 274			
4225A.105	Tank with right hand side trip lever, complete with coupling components and tank trim	32 lbs (14.5 kg)	0.76	020 White	225			
735171-400	Tank cover		0.51	020 White 021 Bone 222 Linen	73 93 93			
⊳7381232-200.XXX0A	LH trip lever (specify finish) – Chrome supplied	0.44 lbs (0.20 kg)	0.02	002 Polished Chrome 013 Polished Nickel 020 White 021 Bone 222 Linen 224 ORB 278 Legacy Bronze 295 Brushed Nickel	35 39 44 55 55 90 67 47			
⊳ 7381232-201.XXX0A	RH trip lever	0.44 lbs (0.20 kg)	0.06	002 Polished Chrome 295 Brushed Nickel	30 47			
	Recommended Seats (sold separately):							
5321A.65CT	Champion elongated slow-close toilet seat and cover	5 lbs (2.3 kg)	0.29	020 White 021 Bone 222 Linen	80 89 89			

ADA When installed with seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

Two-Piece Toilets

American Standard

wo-Piece Toilets /itreous China	DESCRIPTION						
-4	Champion PRO – Right Height® Round Front Toilets Less Seat • Combination bowl and tank, less seat • High efficiency, ultra-low consumption (1.28 • Meets EPA WaterSense® criteria	gpf/4.8 Lpf),	utilizes 2	20% less water	CEG		
	 Trade specific tank PowerWash[®] rim scrubs bowl with each flush Metal trip lever Metal shank fill valve Includes EZ-Install Tools EverClean[®] Antimicrobial Surface 4" (102 mm) piston-action Accelerator[™] flush 2-3/8" (60 mm) fully-glazed trapway 16-1/2" (419 mm) rim height for accessible at 12" (305 mm) rough-in 10-year warranty (see full warranty on page 5) 	valve					
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price		
211BA.104	Champion PRO – Right Height Round Front Toilet Less Seat Nominal Dimensions: • 28-1/4" x 19" x 31" (718 x 483 x 787 mm)			020 White 021 Bone 222 Linen	461 573 573		
211BA.105	 Same as above with trip lever on right-hand side 			020 White	466		
	Separate Components:						
3195B.101	Right Height round front bowl with two color-matched bolt caps	62 lbs (28 kg)	1.67	020 White 021 Bone 222 Linen	241 299 299		
4225A.104	Tank complete with coupling components and tank trim	32 lbs (14.5 kg)	0.76	020 White 021 Bone 222 Linen	220 274 274		
4225A.105	Tank with right hand side trip lever, complete with coupling components and tank trim	32 lbs (14.5 kg)	0.76	020 White	225		
735171-400	Tank cover		0.51	020 White 021 Bone 222 Linen	73 93 93		
⊳7381232-200.XXX0A	LH trip lever (specify finish) – Chrome supplied	0.44 lbs (0.20 kg)	0.02	002 Polished Chrome 013 Polished Nickel 020 White 021 Bone 222 Linen 224 ORB 278 Legacy Bronze 295 Brushed Nickel	35 39 44 55 55 90 67 47		
⊳7381232-201.XXX0A	RH trip lever	0.44 lbs (0.20 kg)	0.06	002 Polished Chrome 295 Brushed Nickel	30 47		
	Recommended Seat (sold separately):						
5320B.65CT	Champion round front slow-close toilet seat and cover	5 lbs (2.3 kg)	0.23	020 White 021 Bone 222 Linen	67 79 79		
	For other seat options see pages 284-290. For	additional ta	nks see	page 292.			

ADA When installed with seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

American Standard

Low Consumption (1.6 gpf/6.0 Lpf) Toilets

vo-Piece Toilets treous China	DESCRIPTION				
\$	Champion PRO – Right Height [®] Elongated Toilets Less Seat				
	 Combination bowl and tank, less seat Low consumption (1.6 gpf/6.0 Lpf) Trade specific tank PowerWash® rim scrubs bowl with each flush Metal trip lever and metal shank fill valve Includes EZ-Install Tools EverClean® Antimicrobial Surface 4" (102 mm) piston-action Accelerator[™] flush 2-3/8" (60 mm) fully-glazed trapway 16-1/2" (419 mm) rim height for accessible at 12" (305 mm) rough-in 10-year warranty (see full warranty on page 5 	valve			
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Pric
211AA.004	Champion PRO – Right Height Elongated Toilet Less Seat Nominal Dimensions: • 30-1/4" x 19" x 31" (768 x 483 x 787 mm)			020 White 021 Bone 222 Linen	504 628 628
211AA.005	• Same as above with trip lever on right-hand side			020 White	509
	Separate Components:				
3195A.101	Right Height elongated bowl with two color-matched bolt caps	65 lbs (29 kg)	1.83	020 White 021 Bone 222 Linen	284 354 354
4225A.004	Tank complete with coupling components and tank trim	32 lbs (14.5 kg)	0.76	020 White 021 Bone 222 Linen	220 274 274
4225A.005	Tank with right hand side trip lever, complete with coupling components and tank trim	32 lbs (14.5 kg)	0.76	020 White	225
735171-400	Tank cover		0.51	020 White 021 Bone 222 Linen	73 93 93
⊳7381232-200.XXX0A	LH trip lever (specify finish) – Chrome supplied	0.44 lbs (0.20 kg)	0.02	002 Polished Chrome 013 Polished Nickel 020 White 021 Bone 222 Linen 224 ORB 278 Legacy Bronze 295 Brushed Nickel	35 39 44 55 55 90 67 47
⊳7381232-201.XXX0A	RH trip lever	0.44 lbs (0.20 kg)	0.06	002 Polished Chrome 295 Brushed Nickel	30 47
	Recommended Seats (sold separately):				
5321A.65CT	Champion elongated slow-close toilet seat and cover	5 lbs (2.3 kg)	0.29	020 White 021 Bone 222 Linen	80 89 89
	For other seat options see pages 284-290. For	additional to			

ADA When installed with seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

 \diamond Check local codes to determine if 1.6 gpf/6.0 Lpf toilets are allowed in your area.

American Standard

Low Consumption (1.6 gpf/6.0 Lpf) Toilets

o-Piece Toilets eous China	DE	SCRIPTION			
\$	Champion PRO – Right Height [®] Round Front Toilets Less Seat • Combination bowl and tank, less seat • Low consumption (1.6 gpf/6.0 Lpf) • Trade specific tank • PowerWash [®] rim scrubs bowl with each flush • Metal trip lever • Metal shank fill valve • Includes EZ-Install Tools • EverClean [®] Antimicrobial Surface • 4" (102 mm) piston-action Accelerator [™] flush • 2-3/8" (60 mm) fully-glazed trapway • 12" (305 mm) rough-in • 10-year warranty (see full warranty on page 5	valve			
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price
211BA.004	Champion PRO – Right Height Round Front Toilet Less Seat Nominal Dimensions: • 28-1/4" x 19" x 31" (718 x 483 x 787 mm)			020 White 021 Bone 222 Linen	461 573 573
211BA.005	• Same as above with trip lever on right-hand side			020 White	466
	Separate Components:				
3195B.101	Right Height round front bowl with two color-matched bolt caps	62 lbs (28 kg)	1.67	020 White 021 Bone 222 Linen	241 299 299
4225A.004	Tank complete with coupling components and tank trim	32 lbs (14.5 kg)	0.76	020 White 021 Bone 222 Linen	220 274 274
4225A.005	Tank with right hand side trip lever, complete with coupling components and tank trim	32 lbs (14.5 kg)	0.76	020 White	225
735171-400	Tank cover		0.51	020 White 021 Bone 222 Linen	73 93 93
⊳7381232-200.XXX0A	LH trip lever (specify finish) – Chrome supplied	0.44 lbs (0.20 kg)	0.02	002 Polished Chrome 013 Polished Nickel 020 White 021 Bone 222 Linen 224 ORB 278 Legacy Bronze 295 Brushed Nickel	35 39 44 55 55 90 67 47
⊳7381232-201.XXX0A	RH trip lever	0.44 lbs (0.20 kg)	0.06	002 Polished Chrome 295 Brushed Nickel	30 47
	Recommended Seat (sold separately):				
5320B.65CT	Champion round front slow-close toilet seat and cover	5 lbs (2.3 kg)	0.23	020 White 021 Bone 222 Linen	67 79 79

 \overrightarrow{ADA} When installed with seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

American Standard

itreous China	DESCRIPTION							
	Champion PRO - Elongated Toilets Less Seat Image: CEC • Combination bowl and tank, less seat Image: CEC • High efficiency, ultra-low consumption (1.28 gpf/4.8 Lpf), utilizes 20% less water Image: CEC • Meets EPA WaterSense® criteria Trade specific tank • PowerWash® rim scrubs bowl with each flush Image: Meetal shank fill valve • Includes EZ-Install Tools EverClean® Antimicrobial Surface • 4" (102 mm) piston-action Accelerator™ flush valve 2-3/8" (60 mm) fully-glazed trapway • 12" (305 mm) rough-in • 10-year warranty (see full warranty on page 552)							
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price			
211CA.104	Champion PRO – Elongated Toilet Less Seat Nominal Dimensions: • 30-1/4" x 19" x 29-3/8" (768 x 483 x 746 mm)			020 White	429			
211CA.105	 Same as above with trip lever on right-hand side 			020 White	434			
	Separate Components:							
3195C.101	Elongated bowl with two color-matched bolt caps	70 lbs (31.8 kg)	1.83	020 White	209			
4225A.104	Tank complete with coupling components and tank trim	32 lbs (14.5 kg)	0.76	020 White	220			
4225A.105	Tank with right hand side trip lever, complete with coupling components and tank trim	32 lbs (14.5 kg)	0.76	020 White	225			
735171-400	Tank cover		0.51	020 White	73			
⊳ 7381232-200.XXX0A	LH trip lever (specify finish) – Chrome supplied	0.44 lbs (0.20 kg)	0.02	002 Polished Chrome 013 Polished Nickel 020 White 224 ORB 278 Legacy Bronze 295 Brushed Nickel	35 39 44 90 67 47			
⊳ 7381232-201.XXX0A	RH trip lever	0.44 lbs (0.20 kg)	0.06	002 Polished Chrome 295 Brushed Nickel	30 47			
-	Recommended Seat (sold separately):							
5321A.65CT	Champion elongated slow-close toilet seat and cover	5 lbs (2.3 kg)	0.29	020 White	80			

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

American Standard

Low Consumption (1.6 gpf/6.0 Lpf) Toilets

Гwo-Piece Toilets /itreous China	DE	SCRIPTION			
*	Champion PRO – Elongated Toilets Lee • Combination bowl and tank, less seat • Low consumption (1.6 gpf/6.0 Lpf) • Trade specific tank • PowerWash [®] rim scrubs bowl with each flush • Metal trip lever • Metal shank fill valve • Includes EZ-Install Tools • EverClean [®] Antimicrobial Surface • 4" (102 mm) piston-action Accelerator [™] flush • 2-3/8" (60 mm) fully-glazed trapway • 12" (305 mm) rough-in • 10-year warranty (see full warranty on page 5	valve			
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price
211CA.004	Champion PRO – Elongated Toilet Less Seat Nominal Dimensions: • 30-1/4" x 19" x 29-3/8" (768 x 483 x 746 mm)			020 White	429
211CA.005	 Same as above with trip lever on right-hand side 			020 White	434
	Separate Components:			11	
3195C.101	Elongated bowl with two color-matched bolt caps	70 lbs (31.8 kg)	1.83	020 White	209
4225A.004	Tank complete with coupling components and tank trim	32 lbs (14.5 kg)	0.76	020 White	220
4225A.005	Tank with right hand side trip lever, complete with coupling components and tank trim	32 lbs (14.5 kg)	0.76	020 White	225
735171-400	Tank cover (specify color)		0.51	020 White	73
⊳7381232-200.XXX0A	LH trip lever (specify finish) – Chrome supplied	0.44 lbs (0.20 kg)	0.02	002 Polished Chrome 013 Polished Nickel 020 White 224 ORB 278 Legacy Bronze 295 Brushed Nickel	35 39 44 90 67 47
⊳ 7381232-201.XXX0A	RH trip lever	0.44 lbs (0.20 kg)	0.06	002 Polished Chrome 295 Brushed Nickel	30 47
	Recommended Seat (sold separately):		<u> </u>		
5321A.65CT	Champion elongated slow-close toilet seat and cover	5 lbs (2.3 kg)	0.29	020 White	80

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

 \diamond Check local codes to determine if 1.6 gpf/6.0 Lpf toilets are allowed in your area.

American Standard

Two-Piece Toilets /itreous China	DESCRIPTION							
	 Studio Activate Concealed Trapway Right Height® Toilets With Seat LXP® (Luxury Performance) toilet with touchless fl Combination activation bowl and tank, with seat Siphon action jetted bowl with smooth-sided, con 12" (305 mm) rough-in High efficiency, ultra-low consumption (1.28 gpf/4 Meets EPA WaterSense® criteria EverClean® Antimicrobial Surface PowerWash® rim scrubs bowl with each flush 16-1/2" (419 mm) rim height 2-1/8" (54 mm) fully glazed trapway 3" (76 mm) flush valve 9" x 8" (229 x 203 mm) water surface area Includes slow-close seat and cover with conceale for simple removal and reattachment for cleaning Wave hand actuator with manual override flush bu Powered by four AA batteries (included) Two color-matched bolt hole covers Five-year warranty, one-year warranty on electrom (see full warranty on page 553) Design coordinates with Studio lavatories 	cealed trapw .8 Lpf), utilize d seat ring at utton	es 20% le			CEC		
	PRODUCT	NET WEIGHT	PTS	COLORS		ist Rice		
★2794.119	Studio Activate – Concealed Trapway Right Height – Elongated Toilet With Seat Nominal Dimensions: • 30-1/4" x 15-3/4" x 30-3/4" (768 x 400 x 781 mm)			020 White	6	89		
★ 2795.119	Studio Activate – Concealed Trapway Right Height – Round Front Toilet With Seat Nominal Dimensions: • 28-1/4" x 15-3/4" x 30-3/4" (718 x 400 x 781 mm)			020 White	6	61		
	Separate Components:							
3075.120	Right Height elongated bowl with two color-matched bolt hole covers. (Includes 5025A.65G elongated toilet seat and cover)	73 lbs (33 kg)	2.12	020 White	4	51		
3053.120	Right Height round front bowl with two color-matched bolt hole covers. (Includes 5025B.65G round front toilet seat and cover)	69 lbs (31 kg)	2.11	020 White	4	23		
★ 4000.119	12" (305 mm) rough-in "touchless" tank complete with coupling components and tank trim	29 lbs (13 kg)	0.70	020 White	2	38		
735158-400	Tank cover		0.10	020 White	6	64		
5025A.65G	Elongated toilet seat and cover complete with top-mounting hardware	5 lbs (2.3 kg)	0.23	020 White	1	12		
5025B.65G	Round front toilet seat and cover complete with top-mounting hardware	5 lbs (2.3 kg)	0.18	020 White	1	02		
MAP ▷ 7381683-401.0070A	Actuator with batteries and holder	0.80 lbs (0.36 kg)		007 Chrome	1	56		

ADA When installed with provided seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

Two-Piece Toilets

American Standard

wo-Piece Toilets /itreous China	DESCRIPTION							
	 Studio Concealed Trapway Right Height® – Dual Flush Toilets With Sea LXP® (Luxury Performance) toilet Combination dual flush bowl and tank, with seat Siphon action jetted bowl with smooth-sided, cond 12" (305 mm) rough-in High efficiency, low consumption, full flush (1.6 gpi conserving flush (1.1 gpf/4.2 Lpf), utilizes 31% less Meets EPA WaterSense® criteria EverClean® Antimicrobial Surface PowerWash® rim scrubs bowl with each flush 16-1/2" (419 mm) rim height 2-1/8" (54 mm) flush yalve 9" x 8" (229 x 203 mm) water surface area Includes slow-close seat and cover with concealed feature for simple removal and reattachment for cleating for simple removal and reattachment for cleating for simple removal and reattachment for cleating for simple removal more available to the covers Five-year warranty on page 553) Design coordinates with Studio lavatories 	cealed trapw f/6.0 Lpf), s water d seat ring a eaning		ift-off	CEG			
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE			
2794.204	Studio Concealed Trapway – Right Height Dual Flush Elongated Toilet With Seat Nominal Dimensions: • 30-1/4" x 15-3/4" x 30-3/4" (768 x 400 x 781 mm)			020 White	593			
2795.204	Studio Concealed Trapway– Right Height Dual Flush – Round Front Toilet With Seat Nominal Dimensions: • 28-1/4" x 15-3/4" x 30-3/4" (718 x 400 x 781 mm)			020 White	565			
	Separate Components:							
3075.120	Right Height elongated bowl with two color-matched bolt hole covers. (Includes 5025A.65G elongated toilet seat and cover)	73 lbs (33 kg)	2.12	020 White	451			
3053.120	Right Height round front bowl with two color-matched bolt hole covers. (Includes 5025B.65G round front toilet seat and cover)	69 lbs (31 kg)	2.11	020 White	423			
4000.204	1.1/1.6 gpf dual flush 12" (305 mm) rough-in tank complete with coupling components and tank trim	29 lbs (13 kg)	0.70	020 White	142			
735168-400	Tank cover		0.35	020 White	66			
5025A.65G	Elongated toilet seat and cover complete with top-mounting hardware	5 lbs (2.3 kg)	0.23	020 White	112			
5025B.65G	Round front toilet seat and cover complete with top-mounting hardware	5 lbs (2.3 kg)	0.18	020 White	102			
^(IIII) ⊳ 7381203-201.XXX0A	Rectangular top-of-tank push button actuator	0.17 lbs (0.08 kg)		002 Polished Chrome	13			

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

 \triangleright Parts Program (Non-Premier)

American Standard

wo-Piece Toile itreous China	ets	DESCRIPTION					
	 H2Option Siphonic - ADA - Dual Flush Right Height® - Elongated Toilets Less Seat Siphonic action dual flush combination bowl and tank, less seat High efficiency, low consumption, full flush (1.28 gpf/4.8 Lpf), conserving flush (0.92 gpf/3.5 Lpf) Meets EPA WaterSense® and MaP PREMIUM criteria 16-1/2" (419 mm) rim height 12" (305 mm) rough-in EverClean® Antimicrobial Surface PowerWash® rim scrubs bowl with each flush 9" x 8" (229 x 203 mm) water surface area ADA compliant configuration with left-hand trip lever Sanitary dam on bowl 2" (51 mm) fully glazed trapway Two color-matched bolt caps Five-year warranty (see full warranty on page 553) 						
		PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE	
Rest Position	2886204	H ₂ Option Siphonic – ADA – Dual Flush Right Height – Elongated Toilet Less Seat Nominal Dimensions: • 29-3/4" x 15" x 31-1/2" (756 x 381 x 800 mm)			020 White	477	
Full Flush Bosition	2886205	Same as above except with trip lever on right-hand side			020 White	482	
		Separate Components:			1		
Partial Flush	3705216	Right Height elongated bowl with color-matched bolt caps	45 lbs (20 kg)	1.83	020 White	222	
Position	4133A204	12" (305 mm) rough-in tank	27 lbs (12 kg)	0.83	020 White	255	
	4133A205	12" (305 mm) rough-in tank with right-hand trip lever	27 lbs (12 kg)	0.83	020 White	260	
	735177-400	Tank cover		0.35	020 White	67	
⊳73819	910-200.XXX0A	Right-hand trip lever			002 Polished Chrome	25	
⊳73819	910-201.XXX0A	Left-hand trip lever			002 Polished Chrome	25	
		Recommended Seat (sold separately):	1	1	1	1	
	5257A.65MT	Elongated slow-close seat and cover	3.4 lbs (1.5 kg)	0.24	020 White	51	

ADA When installed with seat, and top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

American Standard

Two-Piece Toilets Vitreous China	DE	SCRIPTION			
	 H₂Option Siphonic – Dual Flush Right Height[®] – Elongated Toilets Less Siphonic action dual flush combination bowl High efficiency, low consumption, full flush (1 conserving flush (0.92 gpf/3.5 Lpf) Meets EPA WaterSense[®] and MaP PREMIUN 16-1/2" (419 mm) rim height 12" (305 mm) rough-in EverClean[®] Antimicrobial Surface PowerWash[®] rim scrubs bowl with each flush 9" x 8" (229 x 203 mm) water surface area Chrome plated top-mounted push button act Sanitary dam on bowl 2" (51 mm) fully glazed trapway Two color-matched bolt caps Five-year warranty (see full warranty on page 	and tank, les .28 gpf/4.8 l 1 criteria 1 .uator			
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price
2886.218	H ₂ Option Siphonic – Dual Flush Right Height – Elongated Toilet Less Seat Nominal Dimensions: • 29-3/4" x 15" x 31-1/2" • (756 x 381 x 800 mm)			020 White 021 Bone 222 Linen	477 598 598
2886.518	Same as above except with tank with Aquaguard liner			020 White 021 Bone 222 Linen	520 650 650
	Separate Components:			1	1
3705.216	Right Height elongated bowl with two color-matched bolt caps	45 lbs (20 kg)	1.83	020 White 021 Bone 222 Linen	222 279 279
4133A.218	12" (305 mm) rough-in tank	27 lbs (12 kg)	0.85	020 White 021 Bone 222 Linen	255 319 319
4133A.518	12" (305 mm) rough-in tank with Aquaguard liner	27 lbs (12 kg)	0.85	020 White 021 Bone 222 Linen	298 371 371
735138-400	Tank cover		0.09	020 White 021 Bone 222 Linen	57 71 71
⊳7381092-201.XXX0A	Rectangular top-of-tank push button actuator (specify finish)	0.16 lbs (0.07 kg)		002 Polished Chrome	6
	Recommended Seat (sold separately):			·	
5257A.65MT	Elongated slow-close seat and cover	3.4 lbs (1.5 kg)	0.24	020 White 021 Bone 222 Linen	51 56 56
	For other seat options see pages 284-290.			1	1

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

 \triangleright Parts Program (Non-Premier)

American Standard

Two-Piece Toilets Vitreous China	DESCRIPTION						
	H2Option Siphonic – Dual Flush Elongated Toilets Less Seat • Siphonic action dual flush combination bowl and tank, less seat • High efficiency, low consumption, full flush (1.28 gpf/4.8 Lpf), conserving flush (0.92 gpf/3.5 Lpf) • Meets EPA WaterSense® and MaP PREMIUM criteria • 12" (305 mm) rough-in • EverClean® Antimicrobial Surface • PowerWash® rim scrubs bowl with each flush • 9" x 8" (229 x 203 mm) water surface area • Chrome plated top-mounted push button actuator • Sanitary dam on bowl • 2" (51 mm) fully glazed trapway • Two color-matched bolt caps • Five-year warranty (see full warranty on page 553)						
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE		
2887.218	H ₂ Option Siphonic – Dual Flush Elongated Toilet Less Seat Nominal Dimensions: • 29-3/4" x 15" x 30" (756 x 381 x 762 mm)			020 White 021 Bone 222 Linen	422 528 528		
2887.518	 Same as above except tank with Aquaguard liner 			020 White 021 Bone 222 Linen	465 580 580		
	Separate Components:			·			
3706.216	Elongated bowl with color-matched bolt caps	43 lbs (19.5 kg)	1.83	020 White 021 Bone 222 Linen	167 209 209		
4133A.218	12" (305 mm) rough-in tank	27 lbs (12 kg)	0.85	020 White 021 Bone 222 Linen	255 319 319		
4133A.518	12" (305 mm) rough-in tank with Aquaguard liner	27 lbs (12 kg)	0.85	020 White 021 Bone 222 Linen	298 371 371		
735138-400	Tank cover		0.09	020 White 021 Bone 222 Linen	57 71 71		
⊳7381092-201.XXX0A	Rectangular top-of-tank push button actuator (specify finish)	0.16 lbs (0.07 kg)		002 Polished Chrome	6		
	Recommended Seat (sold separately):						
5257A.65MT	Elongated slow-close seat and cover	3.4 lbs (1.5 kg)	0.24	020 White 021 Bone 222 Linen	51 56 56		

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

 \triangleright Parts Program (Non-Premier)

American Standard

vo-Piece Toilets treous China	DESCRIPTION						
	H ₂ Option Siphonic – Dual Flush Round Front Toilets Less Seat • Siphonic action dual flush combination bowl a • High efficiency, low consumption, full flush (1 conserving flush (0.92 gpf/3.5 Lpf) • Meets EPA WaterSense® and MaP PREMIUM • 12" (305 mm) rough-in • EverClean® Antimicrobial Surface • PowerWash® rim scrubs bowl with each flush • 9" x 8" (229 x 203 mm) water surface area • Chrome plated top-mounted push button act • Sanitary dam on bowl • 2" (51 mm) fully glazed trapway • Two color-matched bolt caps • Five-year warranty (see full warranty on page	.28 gpf/4.8 l I criteria uator					
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price		
2889.218	H ₂ Option Siphonic – Dual Flush Round Front Toilet Less Seat Nominal Dimensions: • 27-3/4" x 15" x 30" (705 x 381 x 762 mm)			020 White 021 Bone 222 Linen	365 459 459		
2889.518	 Same as above except tank with Aquaguard liner 			020 White 021 Bone 222 Linen	408 511 511		
	Separate Components:						
3708.216	Round front bowl with color-matched bolt caps	42 lbs (19 kg)	1.27	020 White 021 Bone 222 Linen	110 140 140		
4133A.218	Tank complete	27 lbs (12 kg)	0.85	020 White 021 Bone 222 Linen	255 319 319		
4133A.518	Tank complete with Aquaguard liner	27 lbs (12 kg)	0.85	020 White 021 Bone 222 Linen	298 371 371		
735138-400	Tank cover		0.09	020 White 021 Bone 222 Linen	57 71 71		
⊳7381092-201.XXX0A	Rectangular top-of-tank push button actuator (specify finish)	0.16 lbs (0.07 kg)		002 Polished Chrome	6		
	Recommended Seat (sold separately):						
5259B.65MT	Round front slow-close seat and cover	3.0 lbs (1.4 kg)	0.24	020 White 021 Bone 222 Linen	46 51 51		

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

 \triangleright Parts Program (Non-Premier)

Two-Piece Toilets

American Standard

Ultra-High Efficiency (1.1 gpf/4.2 Lpf) Toilets

Two-Piece Toilets Vitreous China	DESCRIPTION							
	H2Optimum Siphonic – Right Height® To Less Seat Siphonic action combination bowl and tank, I Ultra-High Efficiency Toilet (UHET) 1.1 gpf/4.2 Meets EPA WaterSense® and MaP PREMIUM 16-1/2" (419 mm) rim height 12" (305 mm) rough-in EverClean® Antimicrobial Surface PowerWash® rim scrubs bowl with each flush 9" x 8" (229 x 203 mm) water surface area Chrome trip lever Sanitary dam on bowl 2" (51 mm) fully glazed trapway Two color-matched bolt caps Five-year warranty (see full warranty on page	ess seat 2 Lpf 1 criteria						
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price			
288AA.114	H ₂ Optimum Siphonic – Right Height Elongated Toilet Less Seat Nominal Dimensions: • 29-3/4" x 15" x 31-1/2" (756 x 381 x 800 mm)			020 White	336			
288AA.115	Same as above except with trip lever on right-hand side			020 White	341			
	Separate Components:			·				
3705.216	Right Height elongated bowl with color-matched bolt caps	45 lbs (20 kg)	1.83	020 White	222			
4133A.114	12" (305 mm) rough-in tank	27 lbs (12 kg)	0.83	020 White	114			
4133A.115	12" (305 mm) rough-in tank with trip lever on right-hand side	27 lbs (12 kg)	0.83	020 White	119			
735177-400	Tank cover		0.35	020 White	67			
⊳7381192-XXX0A	LH trip lever (specify finish) – Chrome supplied	0.10 lbs (0.05 kg)	0.02	002 Polished Chrome 020 White	30 30			
⊳ 7381232-201.XXX0A	RH trip lever	0.44 lbs (0.20 kg)	0.06	002 Polished Chrome 295 Brushed Nickel	30 47			
	Recommended Seat (sold separately):			1	1			
5257A.65MT	Elongated slow-close seat and cover	3.4 lbs (1.5 kg)	0.24	020 White 021 Bone 222 Linen	51 56 56			
	For other seat options see pages 284-290.			1				

 \overrightarrow{ADA} When installed with seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

American Standard

Ultra-High Efficiency (1.1 gpf/4.2 Lpf) Toilets

Two-Piece Toilets Vitreous China	DESCRIPTION						
	H ₂ Optimum Siphonic Toilets Less Seat Siphonic action combination bowl and tank, less seat Ultra-High Efficiency Toilet (UHET) 1.1 gpf/4.2 Lpf Meets EPA WaterSense® and MaP PREMIUM criteria 12" (305 mm) rough-in EverClean® Antimicrobial Surface PowerWash® rim scrubs bowl with each flush 9" x 8" (229 x 203 mm) water surface area Chrome trip lever Sanitary dam on bowl 2" (51 mm) fully glazed trapway Two color-matched bolt caps Five-year warranty (see full warranty on page 553)						
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE		
288CA.114	H ₂ Optimum Siphonic – Elongated Toilet Less Seat Nominal Dimensions: • 29-3/4" x 15" x 30" (756 x 381 x 762 mm)			020 White	281		
288DA.114	H ₂ Optimum Siphonic Round Front Toilet Less Seat Nominal Dimensions: • 27-3/4" x 15" x 30" (705 x 381 x 762 mm)			020 White	224		
	Separate Components:						
3706.216	Elongated bowl with color-matched bolt caps	43 lbs (19.5 kg)	1.83	020 White	167		
3708.216	Round front bowl with color-matched bolt caps	42 lbs (19 kg)	1.27	020 White	110		
4133A.114	12" (305 mm) rough-in tank complete	27 lbs (12 kg)	0.83	020 White	114		
735177-400	Tank cover		0.35	020 White	67		
⊳7381192-XXX0A	LH trip lever (specify finish) – Chrome supplied	0.10 lbs (0.05 kg)	0.02	002 Polished Chrome 020 White	30 30		
	Recommended Seats (sold separately):			1			
5257A.65MT	Elongated slow-close seat and cover	3.4 lbs (1.5 kg)	0.24	020 White 021 Bone 222 Linen	51 56 56		
5259B.65MT	Round front slow-close seat and cover	3.0 lbs (1.4 kg)	0.24	020 White 021 Bone 222 Linen	46 51 51		

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

American Standard

Two-Piece Toilets Vitreous China	DESCRIPTION						
	Cadet 3 FloWise – Concealed Trapway Right Height [®] – Elongated Toilets With Combination bowl and tank, with seat 12" (305 mm) rough-in High efficiency, ultra-low consumption (1.28 Meets EPA WaterSense [®] criteria EverClean [®] Antimicrobial Surface 16-1/2" (419 mm) rim height for accessible a Siphon action jetted bowl with smooth-sided 2-1/8" (54 mm) fully glazed trapway 9" x 8" (229 x 203 mm) water surface area PowerWash [®] rim scrubs bowl with each flust 3" (76 mm) flush valve Chrome plated trip lever Includes top-mount slow-close seat and cow for simple removal and reattachment for cleat Two color-matched bolt hole covers Five-year warranty (see full warranty on page	seat gpf/4.8 Lpf), pplication l, concealed n er with easy uning	trapway		CEC		
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE		
2989.101	Cadet 3 FloWise – Concealed Trapway Right Height – Elongated Toilet With Seat Nominal Dimensions: • 30-1/4" x 15-3/4" x 30-3/4" (768 x 400 x 781 mm)			020 White	544		
2989.813	Same as above with trip lever on right-hand side			020 White	550		
	Separate Components:			1	1		
3075.000	Right Height elongated bowl with two color-matched bolt hole covers. (Includes top-mounting elongated toilet seat and cover with slow-close snap-off hinges)	73 lbs (33 kg)	2.11	020 White	422		
4000.101	1.28 gpf/4.8 Lpf 12" tank complete with coupling components and tank trim	29 lbs (13 kg)	0.70	020 White	122		
4000.813	1.28 gpf/4.8 Lpf 12" (305 mm) tank complete with coupling components, tank trim and trip lever on right side	29 lbs (13 kg)	0.61	020 White	128		
735154-400	Tank cover		0.05	020 White	67		
⊳738903-XXX0A	LH trip lever (specify finish) – Chrome supplied	0.08 lbs (0.04 kg)	0.01	002 Polished Chrome 020 White 222 Linen 243 Matte Black 295 Brushed Nickel	21 34 40 87 30		
⊳738919-XXX0A	RH trip lever	0.08 lbs (0.04 kg)	0.01	002 Polished Chrome	21		
5024A.65G	Easy Lift-off elongated seat and cover complete with top-mounting hardware	5 lbs (2.3 kg)	0.24	020 White	112		

ADA When installed with provided seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

American Standard

Two-Piece Toilets /itreous China	DESCRIPTION						
	Cadet 3 FloWise – Concealed Trapway Right Height [®] – Round Front Toilets Wi Combination bowl and tank, with seat 12" (305 mm) rough-in High efficiency, ultra-low consumption (1.28 g Meets EPA WaterSense [®] criteria EverClean [®] Antimicrobial Surface 16-1/2" (419 mm) rim height for accessible ap Siphon action jetted bowl with smooth-sided 2-1/8" (54 mm) fully glazed trapway 9" x 8" (229 x 203 mm) water surface area PowerWash [®] rim scrubs bowl with each flush 3" (76 mm) flush valve Chrome plated trip lever Includes top-mount slow-close seat and cover for simple removal and reattachment for clear Two color-matched bolt hole covers Five-year warranty (see full warranty on page	th Seat gpf/4.8 Lpf), pplication , concealed er with easy ning	trapway		CEC		
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE		
2988.101	Cadet 3 FloWise – Concealed Trapway Right Height – Round Front Toilet With Seat Nominal Dimensions: • 28-1/4" x 15-3/4" x 30-3/4" (718 x 400 x 781 mm)			020 White	518		
2988.813	Same as above with trip lever on right-hand side			020 White	524		
	Separate Components:			1			
3053.000	Right Height round front bowl with two color-matched bolt hole covers. (Includes top-mounting round front toilet seat and cover with slow-close snap-off hinges)	69 lbs (31 kg)	1.96	020 White	396		
4000.101	1.28 gpf/4.8 Lpf 12" tank complete with coupling components and tank trim	29 lbs (13 kg)	0.70	020 White	122		
4000.813	1.28 gpf/4.8 Lpf 12" (305 mm) tank complete with coupling components, tank trim and trip lever on right-hand side	29 lbs (13 kg)	0.61	020 White	128		
735154-400	Tank cover		0.05	020 White	67		
⊳ 738903-XXX0A	LH trip lever (specify finish) – Chrome supplied	0.08 lbs (0.04 kg)	0.01	002 Polished Chrome 020 White 222 Linen 243 Matte Black 295 Brushed Nickel	21 34 40 87 30		
⊳738919-XXX0A	RH trip lever	0.08 lbs (0.04 kg)	0.01	002 Polished Chrome	21		
5024B.65G	Round front transitional slow-close seat and cover with top-mounting hardware	2.82 lbs (1.28 kg)	0.24	020 White	102		

 \overrightarrow{ADA} When installed with provided seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

American Standard

wo-Piece Toilets /itreous China	DESCRIPTION						
Vitreous China	Triangle Cadet PRO – Right Height® Image: Celevent and the second						
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price		
216AD.104	Triangle Cadet PRO – Right Height Elongated Toilet Less Seat Nominal Dimensions: • 35-3/16" x 19-3/8" x 32-1/16" (894 x 492 x 815 mm)			020 White	532		
	Separate Components:	1					
3517A.101	Right Height elongated bowl with color-matched bolt caps	55 lbs (25 kg)	1.83	020 White	275		
4189D.104	1.28 gpf/4.8 Lpf Triangle tank complete	39 lbs (17.7 kg)	1.17	020 White	257		
735143-400	1.28 gpf/4.8 Lpf Triangle tank cover		0.10	020 White	87		
⊳7381297-200.XXX0A	LH trip lever	0.41 lbs (0.19 kg)		020 White	14		
	Recommended Seat (sold separately):						
5257A.65MT	Elongated slow-close seat and cover	3.4 lbs (1.5 kg)	0.24	020 White	51		

ADA When installed with provided seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

Two-Piece Toilets

American Standard

o-Piece Toilets eous China	DESCRIPTION					
	Triangle Cadet PRO – Right Height® Image: CEO Round Front Toilet Less Seat Image: CEO • Combination bowl and tank, less seat Provides corner toilet installation solution • High efficiency, ultra-low consumption (1.28 gpf/4.8 Lpf), utilizes 20% less water Image: CEO • Meets EPA WaterSense® criteria PowerWash® rim scrubs bowl with each flush • Metal trip lever Metal shank fill valve • Includes EZ-Install Tools EverClean® Antimicrobial Surface • 16-1/2" (419 mm) rim height for accessible application • 12" (305 mm) rough-in • 2-1/8" (54 mm) fully glazed trapway • 9" x 8" (229 x 203 mm) water surface area • 3" (76 mm) flush valve • Color-matched trip lever • Five-year warranty (see full warranty on page 553)					
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Pric	
216BD.104	Triangle Cadet PRO – Right Height Round Front Toilet Less Seat Nominal Dimensions: • 33-3/16" x 19-3/8" x 32-1/16" (843 x 492 x 815 mm)			020 White	508	
	Separate Components:				1	
3517B.101	Right Height round front bowl with color-matched bolt caps	53 lbs (24 kg)	1.67	020 White	251	
4189D.104	1.28 gpf/4.8 Lpf Triangle tank complete	39 lbs (17.7 kg)	1.17	020 White	257	
735143-400	1.28 gpf/4.8 Lpf Triangle tank cover		0.10	020 White	87	
⊳7381297-200.XXX0A	LH trip lever	0.41 lbs (0.19 kg)		020 White	14	
	Recommended Seat (sold separately):	1	11		1	
5259B.65MT					1	
5259B.65MT	Round front slow-close seat and cover	3.0 lbs (1.36 kg)	0.24	020 White	46	

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

Two-Piece Toilets

American Standard

Two-Piece Toilets Vitreous China	DESCRIPTION					
	Cadet PRO – Right Height® Elongated Toilets Less Seat – 12" Roug Combination bowl and tank, less seat 12" (305 mm) rough-in High efficiency, ultra-low consumption (1.28 g Meets EPA WaterSense® criteria Trade specific tank PowerWash® rim scrubs bowl with each flush Metal trip lever Metal shank fill valve Includes EZ-Install Tools EverClean® Antimicrobial Surface 16-1/2" (419 mm) rim height for accessible ap 2-1/8" (54 mm) fully glazed trapway 9" x 8" (229 x 203 mm) water surface area 3" (76 mm) flush valve	gpf/4.8 Lpf), oplication	utilizes 2	20% less water	CEO	
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE	
215AA.104	Cadet PRO – Right Height Elongated Toilet Less Seat – 12" Rough-In Nominal Dimensions: • 30-1/4" x 17-1/4" x 30-1/4" (768 x 438 x 768 mm)			020 White 021 Bone 222 Linen	387 482 482	
215AA.105	 Same as above with trip lever on right-hand side 			020 White	392	
	Separate Components:					
3517A.101	Right Height elongated bowl with two color-matched bolt caps	55 lbs (25 kg)	1.83	020 White 021 Bone 222 Linen	275 343 343	
4188A.104	1.28 gpf/4.8 Lpf tank complete with coupling components and tank trim	28 lbs (12.7 kg)	0.76	020 White 021 Bone 222 Linen	112 139 139	
4188A.105	1.28 gpf/4.8 Lpf tank complete with coupling components, tank trim and trip lever on right-hand side	28 lbs (12.7 kg)	0.76	020 White	117	
735172-400	Tank cover		0.35	020 White 021 Bone 222 Linen	70 88 88	
⊳7381231-200.XXX0A	LH trip lever (specify finish) – Chrome supplied	0.46 lbs (0.21 kg)	0.01	002 Polished Chrome 013 Polished Nickel 020 White 099 Polished Brass 224 ORB 278 Legacy Bronze 295 Brushed Nickel	32 39 38 38 58 94 46	
⊳ 7381231-201.XXX0A	RH trip lever (specify finish) – Chrome supplied	0.46 lbs (0.21 kg)	0.01	002 Polished Chrome 295 Brushed Nickel	32 46	
	Recommended Seat (sold separately):					
5257A.65MT	Elongated slow-close seat and cover	3.4 lbs (1.5 kg)	0.24	020 White 021 Bone 222 Linen	51 56 56	

ADA When installed with provided seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

American Standard

Two-Piece Toilets Vitreous China	DESCRIPTION						
THE COUS ON THE	Cadet PRO – Right Height® Round Front Toilets Less Seat – 12" Ro • Combination bowl and tank, less seat • 12" (305 mm) rough-in • High efficiency, ultra-low consumption (1.28 • • Meets EPA WaterSense® criteria • Trade specific tank • PowerWash® rim scrubs bowl with each flush • Metal trip lever • Metal shank fill valve • Includes EZ-Install Tools • EverClean® Antimicrobial Surface • 16-1/2" (419 mm) rim height for accessible an • 2-1/8" (54 mm) fully glazed trapway • 9" x 8" (229 x 203 mm) water surface area • 3" (76 mm) flush valve • Five-year warranty (see full warranty on page	gpf/4.8 Lpf), n oplication	utilizes 2	20% less water	CEO		
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE		
215BA.104	Cadet PRO – Right Height – Round Front Toilet Less Seat – 12" Rough-In Nominal Dimensions: • 28-1/4" x 17-1/4" x 30-1/4" (718 x 438 x 768 mm)			020 White 021 Bone 222 Linen	363 451 451		
215BA.105	 Same as above with trip lever on right-hand side 			020 White	368		
	Separate Components:						
3517B.101	Right Height round front bowl with two color-matched bolt caps	53 lbs (24 kg)	1.67	020 White 021 Bone 222 Linen	251 312 312		
4188A.104	1.28 gpf/4.8 Lpf tank complete with coupling components and tank trim	28 lbs (12.7 kg)	0.76	020 White 021 Bone 222 Linen	112 139 139		
4188A.105	1.28 gpf/4.8 Lpf tank complete with coupling components, tank trim and trip lever on right-hand side	28 lbs (12.7 kg)	0.76	020 White	117		
735172-400	Tank cover		0.35	020 White 021 Bone 222 Linen	70 88 88		
⊳7381231-200.XXX0A	LH trip lever (specify finish) – Chrome supplied	0.46 lbs (0.21 kg)	0.02	002 Polished Chrome 013 Polished Nickel 020 White 099 Polished Brass 224 ORB 278 Legacy Bronze 295 Brushed Nickel	32 39 38 38 58 94 46		
⊳7381231-201.XXX0A	RH trip lever	0.46 lbs (0.21 kg)	0.06	002 Polished Chrome 295 Brushed Nickel	32 46		
	Recommended Seat (sold separately):						
5259B.65MT	Round front slow-close seat and cover	3.0 lbs (1.36 kg)	0.24	020 White 021 Bone 222 Linen	46 51 51		
	For other seat options see pages 284-290. For	additional ta	nks see	page 293.			

 \overrightarrow{ADA} When installed with seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

American Standard

Low Consumption (1.6 gpf/6.0 Lpf) Toilets

DESCRIPTION					
Cadet PRO – Right Height [®] Elongated Toilets Less Seat – 12" Rough-In • Combination bowl and tank, less seat • 12" (305 mm) rough-in • Low consumption (1.6 gpf/6.0 Lpf) • Trade specific tank • PowerWash [®] rim scrubs bowl with each flush • Metal trip lever • Metal shank fill valve • Includes EZ-Install Tools • EverClean [®] Antimicrobial Surface • 16-1/2" (419 mm) rim height for accessible application • 2-1/8" (54 mm) fully glazed trapway 9" x 8" (229 x 203 mm) water surface area • 3" (76 mm) flush valve • Five-year warranty (see full warranty on page 553)					
Cadet PRO – Right Height Elongated Toilet Less Seat – 12" Rough-In Nominal Dimensions: • 30-1/4" x 17-1/4" x 30-1/4" (768 x 438 x 768 mm)			020 White 021 Bone 222 Linen	387 482 482	
 Same as above with trip lever on right-hand side 			020 White	392	
Separate Components:					
Right Height elongated bowl with two color-matched bolt caps	55 lbs (25 kg)	1.83	020 White 021 Bone 222 Linen	275 343 343	
1.6 gpf/6.0 Lpf tank complete with coupling components and tank trim	30 lbs (14 kg)	0.76	020 White 021 Bone 222 Linen	112 139 139	
1.6 gpf/6.0 Lpf tank complete with coupling components, tank trim and trip lever on right-hand side	30 lbs (14 kg)	0.76	020 White	117	
Tank cover		0.35	020 White 021 Bone 222 Linen	70 88 88	
LH trip lever (specify finish) – Chrome supplied	0.46 lbs (0.21 kg)	0.02	002 Polished Chrome 013 Polished Nickel 020 White 099 Polished Brass 224 ORB 278 Legacy Bronze 295 Brushed Nickel	32 39 38 38 58 94 46	
RH trip lever	0.46 lbs (0.21 kg)	0.06	002 Polished Chrome 295 Brushed Nickel	32 46	
Recommended Seat (sold separately):					
Elongated slow-close seat and cover	3.4 lbs (1.5 kg)	0.24	020 White 021 Bone	51 56	
	Cadet PRO – Right Height® Elongated Toilets Less Seat – 12" Roug • Combination bowl and tank, less seat • 12" (305 mm) rough-in • Low consumption (1.6 gpf/6.0 Lpf) • Trade specific tank • PowerWash® rim scrubs bowl with each flush • Metal trip lever • Metal shank fill valve • Includes EZ-Install Tools • EverClean® Antimicrobial Surface • 16-1/2" (419 mm) rim height for accessible ap • 2-1/8" (54 mm) fully glazed trapway • 9" x 8" (229 x 203 mm) water surface area • 3" (76 mm) flush valve • Five-year warranty (see full warranty on page PRODUCT Cadet PRO – Right Height Elongated Toilet Less Seat – 12" Rough-In Nominal Dimensions: • 30-1/4" x 17-1/4" x 30-1/4" (768 x 438 x 768 mm) • Same as above with trip lever on right-hand side Separate Components: Right Height elongated bowl with two color-matched bolt caps 1.6 gpf/6.0 Lpf tank complete with coupling components, tank trim and trip lever on right-hand side Tank cover LH trip lever (specify finish) – Chrome supplied RH trip lever Recommended Seat (sold separately):	Cadet PRO - Right Height® Elongated Toilets Less Seat - 12" Rough-In • Combination bowl and tank, less seat • 12" (305 mm) rough-in • Low consumption (1.6 gpt/6.0 Lpf) • Trade specific tank • PowerWash® rim scrubs bowl with each flush • Metal shank fill valve • Includes EZ-Install Tools EverClean® Antimicrobial Surface • 16-1/2" (419 mm) rim height for accessible application • 2-1/8" (54 mm) fully glazed trapway • 9" x 8" (229 x 203 mm) water surface area • 3" (76 mm) flush valve • Five-year warranty (see full warranty on page 553) PRODUCT NET WEIGHT Cadet PRO - Right Height Elongated Toilet Less Seat - 12" Rough-In Nominal Dimensions: Net WEIGHT • 30-1/4" x 17-1/4" x 30-1/4" (768 x 438 x 768 mm) Separate Components: Right Height elongated bowl with two color-matched bolt caps 55 lbs (25 kg) 1.6 gpt/6.0 Lpf tank complete with coupling components, tank trim and trip 30 lbs (14 kg) 1.6 gpt/6.0 Lpf tank complete with coupling components, tank trim and trip (14 kg) 1.4 kg) 1.6 gpt/6.0 Lpf tank complete with coupling components, tank trim and trip 0.46 lbs (0.21 kg) 1.4 kg) I htrip lever (specify finish) 0.46	Cadet PRO – Right Height® Elongated Toilets Less Seat – 12" Rough-In Combination bowl and tank, less seat 12" (305 mm) rough-in Low consumption (1.6 gpf/6.0 Lpf) Trade specific tank PowerWash® rim scrubs bowl with each flush Metal shank fill valve Includes EZ-Install Tools EverClean® Antimicrobial Surface 16-1/2" (419 mm) rin height flor accessible application 2-1/8" (54 mm) fully glazed trapway 9" x 8" (229 x 203 mm) water surface area 3" (76 mm) flush valve Five-year warranty (see full warranty on page 553) PRODUCT NET WEIGHT Cadet PRO - Right Height Elongated Toilet Less Seat - 12" Rough-In Nominal Dimensions: NET 3'' (76 mm) flush valve Steparate Components: Right Height elongated bowl with trip lever on right-hand side 1.83 Solor-matched bolt caps (25 kg) 1.6 gpf/6.0 Lpf tank complete with coupling components and tank trim 30 lbs 0.76 1.6 gpf/6.0 Lpf tank complete with coupling components, tank trim and trip lever on right-hand side 30 lbs 0.76 Tank cover 0.46 lbs 0.02 0.21 kg) 0.02 RH trip lever 0.46 lbs 0.04	Cadet PRO - Right Height® Elongated Toilets Less Seat - 12" Rough-In - Combination bowl and tank, less seat 12" (305 mm) rough-in Low consumption (1.6 gpt/6.0 Lpt) Trade specific tank PowerWash" rim scrubs bowl with each flush Metal shark fill valve Includes E2-Instal Tools E-1/2" (419 mm) rim height for accessible application 2-1/3" (54 mm) flubh valve Five-year warranty (see full warranty on page 553) PRODUCT NET WEIGHT Cadet PRO - Right Height Elongated Toilet Less Seat - 12" Rough-In Nominal Dimensions: 020 White 021 White 022 White 022 Linen 222 Linen * Same as above with trip lever on right-hand side 020 White Separate Components: 55 lbs 020 White Right Height elongated bowl with two color-matched boit caps 55 lbs 020 White 1.6 gpt/6.0 Lpf tank complete with coupling components and tank trim 30 lbs 0.76 020 White 1.6 gpt/6.0 Lpf tank complete with coupling components, tank trim and trip lever on right-hand side 0.35 020 White Tank cover 0.35 020 White 021 Bone 222 Linen <t< td=""></t<>	

ADA When installed with seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements. \diamond Check local codes to determine if 1.6 gpf/6.0 Lpf toilets are allowed in your area.

American Standard

Low Consumption (1.6 gpf/6.0 Lpf) Toilets

Two-Piece Toilets Vitreous China	DE	SCRIPTION			
	Cadet PRO – Right Height® Round Front Toilets Less Seat – 12" R • Combination bowl and tank, less seat • 12" (305 mm) rough-in • Low consumption (1.6 gpf/6.0 Lpf) • Trade specific tank • PowerWash® rim scrubs bowl with each flush • Metal trip lever • Metal shank fill valve • Includes EZ-Install Tools • EverClean® Antimicrobial Surface • 16-1/2" (419 mm) rim height for accessible a • 2-1/8" (54 mm) fully glazed trapway • 9" x 8" (229 x 203 mm) water surface area • 3" (76 mm) flush valve	pplication			
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price
215BA.004	Cadet PRO – Right Height – Round Front Toilet Less Seat – 12" Rough-In Nominal Dimensions: • 28-1/4" x 17-1/4" x 30-1/4" (718 x 438 x 768 mm)			020 White 021 Bone 222 Linen	363 451 451
215BA.005	 Same as above with trip lever on right-hand side 			020 White	368
	Separate Components:				
3517B.101	Right Height round front bowl with two color-matched bolt caps	53 lbs (24 kg)	1.67	020 White 021 Bone 222 Linen	251 312 312
4188A.004	1.6 gpf/6.0 Lpf tank complete with coupling components and tank trim	30 lbs (14 kg)	0.76	020 White 021 Bone 222 Linen	112 139 139
4188A.005	1.6 gpf/6.0 Lpf tank complete with coupling components, tank trim and trip lever on right-hand side	30 lbs (14 kg)	0.76	020 White	117
735172-400	Tank cover		0.35	020 White 021 Bone 222 Linen	70 88 88
⊳ 7381231-200.XXX0A	LH trip lever (specify finish) – Chrome supplied	0.46 lbs (0.21 kg)	0.02	002 Polished Chrome 013 Polished Nickel 020 White 099 Polished Brass 224 ORB 278 Legacy Bronze 295 Brushed Nickel	32 39 38 38 58 94 46
⊳7381231-201.XXX0A	RH trip lever	0.46 lbs (0.21 kg)	0.06	002 Polished Chrome 295 Brushed Nickel	32 46
	Recommended Seat (sold separately):				
5259B.65MT	Round front slow-close seat and cover	3.0 lbs (1.36 kg)	0.24	020 White 021 Bone 222 Linen	46 51 51
	For other seat options see pages 284-290. For	additional ta	inks see	page 293.	·

 \overrightarrow{ADA} When installed with seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

American Standard

Two-Piece Toilets Vitreous China	DESCRIPTION						
	Cadet PRO – Right Height® Elongated Toilet Less Seat – 10" Rough Combination bowl and tank, less seat 10" (254 mm) rough-in High efficiency, ultra-low consumption (1.28 g Meets EPA WaterSense® criteria Trade specific tank PowerWash® rim scrubs bowl with each flush Metal trip lever Metal shank fill valve Includes EZ-Install Tools EverClean® Antimicrobial Surface 16-1/2" (419 mm) rim height for accessible ap 2-1/8" (54 mm) fully glazed trapway 9" x 8" (229 x 203 mm) water surface area 3" (76 mm) flush valve	gpf/4.8 Lpf),	utilizes 2	20% less water	CEO		
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price		
215AB.104	Cadet PRO – Right Height Elongated Toilet Less Seat – 10" Rough-In Nominal Dimensions: • 28-1/2" x 18" x 30-1/4" (724 x 457 x 768 mm)			020 White 021 Bone 222 Linen	472 592 592		
	Separate Components:						
3517A.101	Right Height elongated bowl with two color-matched bolt caps	55 lbs (25 kg)	1.83	020 White 021 Bone 222 Linen	275 343 343		
4188B.104	1.28 gpf/4.8 Lpf 10" (254 mm) rough-in tank complete with coupling components and tank trim	27 lbs (12 kg)	0.76	020 White 021 Bone 222 Linen	197 249 249		
735173-400	Tank cover		0.35	020 White 021 Bone 222 Linen	80 92 92		
⊳ 7381231-200.XXX0A	LH trip lever (specify finish) – Chrome supplied	0.46 lbs (0.21 kg)	0.02	002 Polished Chrome 013 Polished Nickel 020 White 099 Polished Brass 224 ORB 278 Legacy Bronze 295 Brushed Nickel	32 39 38 38 58 94 46		
	Recommended Seat (sold separately):			·			
5257A.65MT	Elongated slow-close seat and cover	3.4 lbs (1.5 kg)	0.24	020 White 021 Bone 222 Linen	51 56 56		
	For other seat options see pages 284-290. For a	additional ta	nks see	page 293.			

 \overrightarrow{ADA} When installed with seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

Two-Piece Toilets

American Standard

「wo-Piece Toilets /itreous China	DESCRIPTION						
	Cadet PRO – Right Height [®] Round Front Toilet Less Seat – 10" Roug • Combination bowl and tank, less seat • 10" (254 mm) rough-in • High efficiency, ultra-low consumption (1.28 g • Meets EPA WaterSense [®] criteria • Trade specific tank • PowerWash [®] rim scrubs bowl with each flush • Metal trip lever • Metal shank fill valve • Includes EZ-Install Tools • EverClean [®] Antimicrobial Surface • 16-1/2" (419 mm) rim height for accessible ap • 2-1/8" (54 mm) fully glazed trapway 9" x 8" (229 x 203 mm) water surface area • 3" (76 mm) flush valve • Five-year warranty (see full warranty on page	gpf/4.8 Lpf),	utilizes 2	20% less water	CEC		
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price		
215BB.104	Cadet PRO – Right Height – Round Front Toilet Less Seat – 10" Rough-In Nominal Dimensions: • 26-1/4" x 18" x 30-1/4" (667 x 457 x 768 mm)			020 White 021 Bone 222 Linen	448 561 561		
	Separate Components:						
3517B.101	Right Height round front bowl with two color-matched bolt caps	53 lbs (24 kg)	1.67	020 White 021 Bone 222 Linen	251 312 312		
4188B.104	1.28 gpf/4.8 Lpf 10" (254 mm) rough-in tank complete with coupling components and tank trim	27 lbs (12 kg)	0.76	020 White 021 Bone 222 Linen	197 249 249		
735173-400	Tank cover		0.35	020 White 021 Bone 222 Linen	80 92 92		
⊳7381231-200.XXX0A	LH trip lever (specify finish) – Chrome supplied	0.46 lbs (0.21 kg)	0.02	002 Polished Chrome 013 Polished Nickel 020 White 099 Polished Brass 224 ORB 278 Legacy Bronze 295 Brushed Nickel	32 39 38 38 58 94 46		
	Recommended Seat (sold separately):			1			
5259B.65MT	Round front slow-close seat and cover	3.0 lbs (1.36 kg)	0.24	020 White 021 Bone 222 Linen	46 51 51		
	For other seat options see pages 284-290. For	additional ta	nks see	page 293.			

ADA When installed with seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

ORB (Oil Rubbed Bronze) ▷ Parts Program (Non-Premier)

American Standard

Two-Piece Toilets

Two-Piece Toilets Vitreous China	DES	SCRIPTION			
	Cadet PRO – Right Height® Elongated Toilet Less Seat – 10" Rough Combination bowl and tank, less seat 10" (254 mm) rough-in Low consumption (1.6 gpf/6.0 Lpf) Trade specific tank PowerWash® rim scrubs bowl with each flush Metal trip lever Metal shank fill valve Includes EZ-Install Tools EverClean® Antimicrobial Surface 16-1/2" (419 mm) rim height for accessible ap 2-1/8" (54 mm) fully glazed trapway 9" x 8" (229 x 203 mm) water surface area 3" (76 mm) flush valve Five-year warranty (see full warranty on page	plication			
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE
215AB.004	Cadet PRO – Right Height Elongated Toilet Less Seat – 10" Rough-In Nominal Dimensions: • 28-1/2" x 18" x 30-1/4" (724 x 457 x 768 mm)			020 White 021 Bone 222 Linen	472 592 592
	Separate Components:				
3517A.101	Right Height elongated bowl with two color-matched bolt caps	55 lbs (25 kg)	1.83	020 White 021 Bone 222 Linen	275 343 343
4188B.004	1.6 gpf/6.0 Lpf 10" (254 mm) rough-in tank complete with coupling components and tank trim	30 lbs (14 kg)	0.76	020 White 021 Bone 222 Linen	197 249 249
735173-400	Tank cover		0.35	020 White 021 Bone 222 Linen	80 92 92
⊳7381231-200.XXX0A	LH trip lever (specify finish) – Chrome supplied	0.46 lbs (0.21 kg)	0.02	002 Polished Chrome 013 Polished Nickel 020 White 099 Polished Brass 224 ORB 278 Legacy Bronze 295 Brushed Nickel	32 39 38 38 58 94 46
	Recommended Seat (sold separately):				
5257A.65MT	Elongated slow-close seat and cover	3.4 lbs (1.5 kg)	0.24	020 White 021 Bone 222 Linen	51 56 56
	For other seat options see pages 284-290. For	additional ta	nks see	page 293.	

 \overrightarrow{ADA} When installed with seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

 \diamond Check local codes to determine if 1.6 gpf/6.0 Lpf toilets are allowed in your area.

American Standard

wo-Piece Toilets itreous China	DESCRIPTION					
*	Cadet PRO – Right Height® Round Front Toilet Less Seat – 10" Rou • Combination bowl and tank, less seat • 10" (254 mm) rough-in • Low consumption (1.6 gpf/6.0 Lpf) • Trade specific tank • PowerWash® rim scrubs bowl with each flush • Metal trip lever • Metal shank fill valve • Includes EZ-Install Tools • EverClean® Antimicrobial Surface • 16-1/2" (419 mm) rim height for accessible ap • 2-1/8" (54 mm) fully glazed trapway 9" x 8" (229 x 203 mm) water surface area 3" (76 mm) flush valve • Five-year warranty (see full warranty on page	oplication				
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price	
215BB.004	Cadet PRO – Right Height – Round Front Toilet Less Seat – 10" Rough-In Nominal Dimensions: • 26-1/4" x 18" x 30-1/4" (667 x 457 x 768 mm)			020 White 021 Bone 222 Linen	448 561 561	
	Separate Components:					
3517B.101	Right Height round front bowl with two color-matched bolt caps	53 lbs (24 kg)	1.67	020 White 021 Bone 222 Linen	251 312 312	
4188B.004	1.6 gpf/6.0 Lpf 10" (254 mm) rough-in tank complete with coupling components and tank trim	30 lbs (14 kg)	0.76	020 White 021 Bone 222 Linen	197 249 249	
735173-400	Tank cover		0.35	020 White 021 Bone 222 Linen	80 92 92	
⊳7381231-200.XXX0A	LH trip lever (specify finish) – Chrome supplied	0.46 lbs (0.21 kg)	0.02	002 Polished Chrome 013 Polished Nickel 020 White 099 Polished Brass 224 ORB 278 Legacy Bronze 295 Brushed Nickel	32 39 38 38 58 94 46	
	Recommended Seat (sold separately):					
5259B.65MT	Round front slow-close seat and cover	3.0 lbs (1.36 kg)	0.24	020 White 021 Bone 222 Linen	46 51 51	
	For other seat options see pages 284-290. For	additional to		nogo 002	1	

ADA When installed with seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

 \diamond Check local codes to determine if 1.6 gpf/6.0 Lpf toilets are allowed in your area.

American Standard

Two-Piece Toilets /itreous China	DESCRIPTION						
	Cadet PRO Compact – Right Height [®] Elongated Toilet Less Seat – 12" Rougl	h-In			CEC		
	 Combination bowl and tank, less seat Space saving elongated bowl fits in the space of a round front 12" (305 mm) rough-in High efficiency, ultra-low consumption (1.28 gpf/4.8 Lpf), utilizes 20% less water Meets EPA WaterSense® criteria PowerWash® rim scrubs bowl with each flush Trade specific tank Metal trip lever Metal shank fill valve Includes EZ-Install Tools EverClean® Antimicrobial Surface 16-1/2" (419 mm) rim height for accessible application 2-1/8" (54 mm) fully glazed trapway 9" x 8" (229 x 203 mm) water surface area 3" (76 mm) flush valve 						
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE		
215FA.104	Cadet Pro Compact – Right Height Elongated Toilet Less Seat – 12" Rough-In Uses 10" Tank Nominal Dimensions: • 28-1/4" x 18" x 30-3/8" (718 x 457 x 772 mm)			020 White 021 Bone 222 Linen	472 595 595		
	Separate Components:			11			
3517F.101	Compact Right Height elongated bowl two color-matched bolt caps	55 lbs (25 kg)	1.83	020 White 021 Bone 222 Linen	275 346 346		
4188B.104	1.28 gpf/4.8 Lpf 10" (254 mm) rough-in tank complete with coupling components and tank trim	27 lbs (12 kg)	0.76	020 White 021 Bone 222 Linen	197 249 249		
735173-400	Tank cover 10" tank		0.35	020 White 021 Bone 222 Linen	80 92 92		
⊳ 7381231-200.XXX0A	LH trip lever (specify finish) – Chrome supplied	0.46 lbs (0.21 kg)	0.02	002 Polished Chrome 013 Polished Nickel 020 White 099 Polished Brass 224 ORB 278 Legacy Bronze 295 Brushed Nickel	32 39 38 38 58 94 46		
	Recommended Seat (sold separately):						
5257A.65MT	Elongated slow-close seat and cover	3.4 lbs	0.24	020 White	51		

For other seat options see pages 284-290. For additional tanks see page 293.

ADA When installed with seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

American Standard

Two-Piece Toilets /itreous China	DESCRIPTION						
	Cadet PRO Compact – Right Height® Elongated Toilet Less Seat – 14" Rough-In • Combination bowl and tank, less seat • Space saving elongated bowl fits in the space of a round front • 14" (356 mm) rough-in • High efficiency, ultra-low consumption (1.28 gpf/4.8 Lpf), utilizes 20% less water • Meets EPA WaterSense® criteria • PowerWash® rim scrubs bowl with each flush • Trade specific tank • Metal trip lever • Metal shank fill valve • Includes EZ-Install Tools • EverClean® Antimicrobial Surface • 16-1/2" (419 mm) rim height for accessible application • 2-1/8" (54 mm) fully glazed trapway • 9" x 8" (229 x 203 mm) water surface area • 3" (76 mm) flush valve • Five-year warranty (see full warranty on page 553)						
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price		
215FC.104	Cadet PRO Compact – Right Height Elongated Toilet Less Seat – 14" Rough-In Uses 12" Tank Nominal Dimensions: • 30" x 17-3/8" x 30-3/8" (762 x 441 x 772 mm)			020 White 021 Bone 222 Linen	387 485 485		
	Separate Components:			11			
3517F.101	Compact Right Height elongated bowl two color-matched bolt caps	55 lbs (25 kg)	1.83	020 White 021 Bone 222 Linen	275 346 346		
4188A.104	1.28 gpf/4.8 Lpf 12" (305 mm) rough-in tank complete with coupling components and tank trim	28 lbs (12.7 kg)	0.76	020 White 021 Bone 222 Linen	112 139 139		
735172-400	Tank cover 12" tank		0.35	020 White 021 Bone 222 Linen	70 88 88		
⊳7381231-200.XXX0A	LH trip lever (specify finish) – Chrome supplied	0.46 lbs (0.21 kg)	0.02	002 Polished Chrome 013 Polished Nickel 020 White 099 Polished Brass 224 ORB 278 Legacy Bronze 295 Brushed Nickel	32 39 38 38 58 94 46		
	Recommended Seat (sold separately):						
5257A.65MT	Elongated slow-close lift seat and cover	3.4 lbs (1.5 kg)	0.24	020 White 021 Bone 222 Linen	51 56 56		
	For other seat options see pages 284-290. For						

 $\ensuremath{\underbrace{ADA}}$ When installed with seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

American Standard

wo-Piece Toilets /itreous China	DESCRIPTION						
\$	Cadet PRO Compact – Right Height [®] Elongated Toilet Less Seat – 12" Rough-In						
	 Combination bowl and tank, less seat Space saving elongated bowl fits in the space 12" (305 mm) rough-in Low consumption (1.6 gpf/6.0 Lpf) Trade specific tank PowerWash® rim scrubs bowl with each flush Metal trip lever Metal shank fill valve Includes EZ-Install Tools EverClean® Antimicrobial Surface 16-1/2" (419 mm) rim height for accessible ap 2-1/8" (54 mm) fully glazed trapway 9" x 8" (229 x 203 mm) water surface area 3" (76 mm) flush valve 	oplication	front				
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price		
215FA.004	Cadet PRO Compact – Right Height Elongated Toilet Less Seat – 12" Rough-In Uses 10" Tank Nominal Dimensions: • 28-1/4" x 18" x 30-3/8" (718 x 457 x 772 mm)			020 White 021 Bone 222 Linen	472 595 595		
	Separate Components:						
3517F.101	Compact Right Height elongated bowl two color-matched bolt caps	55 lbs (25 kg)	1.83	020 White 021 Bone 222 Linen	275 346 346		
4188B.004	1.6 gpf/6.0 Lpf 10" (254 mm) rough-in tank complete with coupling components and tank trim	30 lbs (14 kg)	0.76	020 White 021 Bone 222 Linen	197 249 249		
735173-400	Tank cover 10" tank		0.35	020 White 021 Bone 222 Linen	80 92 92		
⊳7381231-200.XXX0A	LH trip lever (specify finish) – Chrome supplied	0.46 lbs (0.21 kg)	0.02	002 Polished Chrome 013 Polished Nickel 020 White 099 Polished Brass 224 ORB 278 Legacy Bronze 295 Brushed Nickel	32 39 38 38 58 94 46		
	Recommended Seat (sold separately):						
5257A.65MT	Elongated slow-close seat and cover	3.4 lbs (1.5 kg)	0.24	020 White 021 Bone 222 Linen	51 56 56		
	For other seat options see pages 284-290. For additional tanks see pages						

ÁDÀ When installed with seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

Check local codes to determine if 1.6 gpf/6.0 Lpf toilets are allowed in your area.

American Standard

wo-Piece Toilets itreous China	DESCRIPTION						
\$	Cadet PRO Compact – Right Height [®] Elongated Toilet Less Seat – 14" Rougl	h-In					
	 Combination bowl and tank, less seat Space saving elongated bowl fits in the space 14" (356 mm) rough-in Low consumption (1.6 gpf/6.0 Lpf) Trade specific tank PowerWash® rim scrubs bowl with each flush Metal trip lever Metal shank fill valve Includes EZ-Install Tools EverClean® Antimicrobial Surface 16-1/2" (419 mm) rim height for accessible ap 2-1/8" (54 mm) fully glazed trapway 9" x 8" (229 x 203 mm) water surface area 3" (76 mm) flush valve Five-year warranty (see full warranty on page 	e of a round	front				
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE		
215FC.004	Cadet PRO Compact – Right Height Elongated Toilet Less Seat – 14" Rough-In Uses 12" Tank Nominal Dimensions: • 30" x 17-3/8" x 30-3/8" (762 x 441 x 772 mm)			020 White 021 Bone 222 Linen	387 485 485		
	Separate Components:			·			
3517F.101	Compact Right Height elongated bowl two color-matched bolt caps	55 lbs (25 kg)	1.83	020 White 021 Bone 222 Linen	275 346 346		
4188A.004	1.6 gpf 12" (305 mm) rough-in tank complete with coupling components and tank trim	30 lbs (14 kg)	0.76	020 White 021 Bone 222 Linen	112 139 139		
735172-400	Tank cover 12" tank		0.35	020 White 021 Bone 222 Linen	70 88 88		
⊳ 7381231-200.XXX0A	LH trip lever (specify finish) – Chrome supplied	0.46 lbs (0.21 kg)	0.02	002 Polished Chrome 013 Polished Nickel 020 White 099 Polished Brass 224 ORB 278 Legacy Bronze 295 Brushed Nickel	32 39 38 38 58 94 46		
	Recommended Seat (sold separately):						
5257A.65MT	Elongated slow-close seat and cover	3.4 lbs (1.5 kg)	0.24	020 White 021 Bone 222 Linen	51 56 56		
	For other seat options see pages 284-290. For additional tanks see page 293.						

ADA When installed with seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

 \diamond Check local codes to determine if 1.6 gpf/6.0 Lpf toilets are allowed in your area.

American Standard

Two-Piece Toilets Vitreous China	DESCRIPTION						
	Cadet PRO Toilets Less Seat – 12" Rou • Combination bowl and tank, less seat • 12" (305 mm) rough-in • High efficiency, ultra-low consumption (1.28 g • Meets EPA WaterSense® criteria • Trade specific tank • PowerWash® rim scrubs bowl with each flush • Metal trip lever • Metal shank fill valve • Includes EZ-Install Tools • EverClean® Antimicrobial Surface • 2-1/8" (54 mm) fully glazed trapway 9" x 8" (229 x 203 mm) water surface area 3" (76 mm) flush valve • Five-year warranty (see full warranty on page	gpf/4.8 Lpf),	utilizes 2	20% less water	CEO		
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price		
215CA.104	Cadet PRO – Elongated Toilet Less Seat 12" Rough-In Nominal Dimensions: • 30-1/4" x 17-1/4" x 28-7/8" (768 x 438 x 733 mm)			020 White 021 Bone 222 Linen	332 412 412		
215DA.104	Cadet Pro – Round Front Toilet Less Seat 12" Rough-In Nominal Dimensions: • 28-1/4" x 17-1/4" x 28-7/8" (718 x 438 x 733 mm)			020 White 021 Bone 222 Linen	269 335 335		
	Separate Components:						
3517C.101	Elongated bowl with two color-matched bolt caps	51 lbs (23 kg)	1.83	020 White 021 Bone 222 Linen	220 273 273		
3517D.101	Round front bowl with two color-matched bolt caps	51 lbs (23 kg)	1.67	020 White 021 Bone 222 Linen	157 196 196		
4188A.104	1.28 gpf/4.8 Lpf tank complete with coupling components and tank trim	28 lbs (12.7 kg)	0.76	020 White 021 Bone 222 Linen	112 139 139		
735172-400	Tank cover		0.35	020 White 021 Bone 222 Linen	70 88 88		
⊳7381231-200.XXX0A	LH trip lever (specify finish) – Chrome supplied	0.46 lbs (0.21 kg)	0.02	002 Polished Chrome 013 Polished Nickel 020 White 099 Polished Brass 224 ORB 278 Legacy Bronze 295 Brushed Nickel	32 39 38 38 58 94 46		
	Recommended Seats (sold separately):						
5257A.65MT	Elongated slow-close seat and cover	3.4 lbs (1.5 kg)	0.24	020 White 021 Bone 222 Linen	51 56 56		
5259B.65MT	Round front slow-close seat and cover	3.00 lbs (1.36 kg)	0.24	020 White 021 Bone 222 Linen	46 51 51		
	For other seat options see pages 284-290. For	additional ta	nks see	page 293.			

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

American Standard

wo-Piece Toilets itreous China	DESCRIPTION						
	Cadet PRO Toilets Less Seat – 12" Rou Combination bowl and tank, less seat 12" (305 mm) rough-in Low consumption (1.6 gpf/6.0 Lpf) Trade specific tank PowerWash® rim scrubs bowl with each flush Metal trip lever Metal shank fill valve Includes EZ-Install Tools EverClean® Antimicrobial Surface 2-1/8" (54 mm) fully glazed trapway 9" x 8" (229 x 203 mm) water surface area 3" (76 mm) flush valve Five-year warranty (see full warranty on page	-					
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price		
215CA.004	Cadet PRO – Elongated Toilet Less Seat 12" Rough-In Nominal Dimensions: • 30-1/4" x 17-1/4" x 28-7/8" 768 x 438 x 733 mm)			020 White 021 Bone 222 Linen	332 412 412		
215DA.004	Cadet PRO – Round Front Toilet Less Seat 12" Rough-In Nominal Dimensions: • 28-1/4" x 17-1/4" x 28-7/8" (718 x 438 x 733 mm)			020 White 021 Bone 222 Linen	269 335 335		
	Separate Components:						
3517C.101	Elongated bowl with two color-matched bolt caps	51 lbs (23 kg)	1.83	020 White 021 Bone 222 Linen	220 273 273		
3517D.101	Round front bowl with two color-matched bolt caps	51 lbs (23 kg)	1.67	020 White 021 Bone 222 Linen	157 196 196		
4188A.004	1.6 gpf/6.0 Lpf tank complete with coupling components and tank trim	30 lbs (14 kg)	0.76	020 White 021 Bone 222 Linen	112 139 139		
735172-400	Tank cover		0.35	020 White 021 Bone 222 Linen	70 88 88		
⊳ 7381231-200.XXX0A	LH trip lever (specify finish) – Chrome supplied	0.46 lbs (0.21 kg)	0.02	002 Polished Chrome 013 Polished Nickel 020 White 099 Polished Brass 224 ORB 278 Legacy Bronze 295 Brushed Nickel	32 39 38 38 58 94 46		
	Recommended Seats (sold separately):						
5257A.65MT	Elongated slow-close seat and cover	3.4 lbs (1.5 kg)	0.24	020 White 021 Bone 222 Linen	51 56 56		
5259B.65MT	Round front slow-close seat and cover	3.0 lbs (1.36 kg)	0.24	020 White 021 Bone	46 51		
				222 Linen	51		

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

 \diamond Check local codes to determine if 1.6 gpf/6.0 Lpf toilets are allowed in your area.

ORB (Oil Rubbed Bronze) ▷ Parts Program (Non-Premier)

Two-Piece Toilets

DESCRIPTION						
 Combination bowl and tank, less seat 10" (254 mm) rough-in High efficiency, ultra-low consumption (1.28 g utilizes 20% less water Meets EPA WaterSense® criteria Trade specific tank PowerWash® rim scrubs bowl with each flush Metal trip lever Metal shank fill valve Includes EZ-Install Tools EverClean® Antimicrobial Surface 2-1/8" (54 mm) fully glazed trapway 9" x 8" (229 x 203 mm) water surface area 3" (76 mm) flush valve 	gpf/4.8 Lpf),			CEC		
PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price		
Cadet PRO – Elongated Toilet Less Seat 10" Rough-In Nominal Dimensions: • 28-1/2" x 18" x 29" (724 x 457 x 737 mm)			020 White 021 Bone 222 Linen	417 522 522		
Cadet PRO – Round Front Toilet Less Seat 10" Rough-In Nominal Dimensions: • 26-1/4" x 18" x 29" (667 x 457 x 737 mm)			020 White 021 Bone 222 Linen	354 445 445		
Separate Components:				I		
Elongated bowl with two color-matched bolt caps	51 lbs (23 kg)	1.83	020 White 021 Bone 222 Linen	220 273 273		
Round front bowl with two color-matched bolt caps	51 lbs (23 kg)	1.67	020 White 021 Bone 222 Linen	157 196 196		
1.28 gpf/4.8 Lpf 10" (254 mm) rough-in tank complete with coupling components and tank trim	27 lbs (12 kg)	0.76	020 White 021 Bone 222 Linen	197 249 249		
Tank cover		0.35	020 White 021 Bone 222 Linen	80 92 92		
LH trip lever (specify finish) – Chrome supplied	0.46 lbs (0.21 kg)	0.02	002 Polished Chrome 013 Polished Nickel 020 White 099 Polished Brass 224 ORB 278 Legacy Bronze 295 Brushed Nickel	32 39 38 38 58 94 46		
Recommended Seats (sold separately):						
Elongated slow-close seat and cover	3.4 lbs (1.5 kg)	0.24	020 White 021 Bone 222 Linen	51 56 56		
Round front slow-close seat and cover	3.0 lbs (1.36 kg)	0.24	020 White 021 Bone	46 51		
	Cadet PRO Toilets Less Seat – 10" Rou • Combination bowl and tank, less seat • 10" (254 mm) rough-in • High efficiency, ultra-low consumption (1.28 g utilizes 20% less water • Meets EPA WaterSense® criteria • Trade specific tank • PowerWash® rim scrubs bowl with each flush • Metal trip lever • Metal shank fill valve • Includes EZ-Install Tools • EverClean® Antimicrobial Surface • 2-1/8" (54 mm) fully glazed trapway • 9" x 8" (229 x 203 mm) water surface area • 3" (76 mm) flush valve • Five-year warranty (see full warranty on page PRODUCT Cadet PRO – Elongated Toilet Less Seat 10" Rough-In Nominal Dimensions: • 28-1/2" x 18" x 29" (724 x 457 x 737 mm) Cadet PRO – Round Front Toilet Less Seat 10" Rough-In Nominal Dimensions: • 26-1/4" x 18" x 29" (667 x 457 x 737 mm) Separate Components: Elongated bowl with two color-matched bolt caps Round front bowl with two color-matched Round front bowl with two color-matched Roun	Cadet PRO Toilets Less Seat – 10" Rough-In• Combination bowl and tank, less seat• 10" (254 mm) rough-in• High efficiency, ultra-low consumption (1.28 gpt/4.8 Lpf), utilizes 20% less water• Meets EPA WaterSense® criteria• Trade specific tank• PowerWash® rim scrubs bowl with each flush• Metal trip lever• Metal shank fill valve• Includes EZ-Install Tools• EverClean® Antimicrobial Surface• 2-1/8" (54 mm) fluly glazed trapway• 9" x 8" (229 x 203 mm) water surface area• 3" (76 mm) flush valve• Five-year warranty (see full warranty on page 553)NET WEIGHTCadet PRO – Elongated Toilet Less Seat 10" Rough-In Nominal Dimensions: • 28-1/2" x 18" x 29" (724 x 457 x 737 mm)Cadet PRO – Round Front Toilet Less Seat (23 kg)Separate Components:Elongated bowl with two color-matched bolt capsbolt caps51 lbs (23 kg)1.28 gpt/4.8 Lpf 10" (254 mm) rough-in tank cover27 lbs (23 kg)1.28 gpt/4.8 Lpf 10" (254 mm) rough-in tank complete with coupling components and tank tim27 lbs (0.21 kg)1.28 gpt/4.8 Lpf 10" (254 mm) rough-in tank cover0.46 lbs (0.21 kg)LH trip lever (specify finish) – Chrome supplied0.46 lbs (0.21 kg)Flongated slow-close seat and cover3.4 lbs (1.5 kg)	Cadet PRO Toiles Less Seat - 10" Rough-In• Combination bowl and tank, less seat• 10" (254 mm) rough-in• High efficiency, ultra-low consumption (1.28 gpt/4.8 Lpf), utilizes 20% less water• Metal Shark fill valve• PowerWash* rim scrubs bowl with each flush• Metal shark fill valve• Includes EZ-Install Tools• EverClean* Antimicrobial Surface• 2.1/8" (54 mm) fully glazed trapway9" x 8" (229 x 203 mm) water surface area3" (76 mm) flush valve• Five-year warranty (see full warranty on page 553)PRODUCTNET WEIGHTCadet PRO - Elongated Toilet Less Seat 10" Rough-In Nominal Dimensions: • 28-1/2" x 18" x 29" (724 x 457 x 737 mm)Image: Colspan="2">Image: Colspan="2">Image: Colspan="2">Image: Colspan="2">Image: Colspan="2">Image: Colspan="2">Image: Colspan="2"Elongated bowl with two color-matched bolt caps51 lbs (23 kg)1.83 (23 kg)Round front bowl with two color-matched bolt caps51 lbs (23 kg)0.76 (23 kg)LH trip lever (specify finish) - Chrome supplied0.46 lbs (0.21 kg)0.02 (0.21 kg)LH trip lever (specify finish) - Chrome supplied0.46 lbs (0.21 kg)0.02 (1.5 kg)	Cadet PRO Toilets Less Seat - 10" Rough-In Combination bowl and tank, less seat 10" (254 mm) rough-in High efficiency, ultra-low consumption (1.28 gpt/4.8 Lpf), ultitizes 20% less water Netst EPA WaterSense® criteria Trade specific tank PowerWash® inscrubs bowl with each flush Metat ETA WaterSense® criteria Trade specific tank PowerWash® inscrubs bowl with each flush Heat althank fill valve Includes EZ-Instail Tools EverClean® Antimicrobial Surface area 2-1/8 (64 mm) fully glazed trapway 9" x 8" (229 x 203 mm) water surface area 3" (76 mm) flush valve PTS CoLORS Cadet PRO - Elongated Toilet Less Seat 020 White 021 Bone 10" Rough-In Netf WEIGHT 020 White Nominal Dimensions: -28-1/2" x 18" x 29" (667 x 457 x 737 mm) 020 White 021 Bone 222 Linen 222 Linen 222 Linen 222 Linen Separate Components: Elongated Dowl with two color-matched 51 lbs 1.67 020 White 021 caps 222 Linen 222 Linen 222 Linen 1.28 gpt/4.8 Lpf 10" (254 mm) rough-in tank complete with coupling components and tank tim 1.67 020 White		

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

American Standard

/itreous China	DESCRIPTION											
\$	Cadet PRO Toilets Less Seat – 10" Rou • Combination bowl and tank, less seat • 10" (254 mm) rough-in • Low consumption (1.6 gpf/6.0 Lpf) • Trade specific tank • PowerWash® rim scrubs bowl with each flush • Metal trip lever • Metal shank fill valve • Includes EZ-Install Tools • EverClean® Antimicrobial Surface • 2-1/8" (54 mm) fully glazed trapway • 9" x 8" (229 x 203 mm) water surface area • 3" (76 mm) flush valve • Five-year warranty (see full warranty on page	1										
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price							
215CB.004	Cadet PRO – Elongated Toilet Less Seat 10" Rough-In Nominal Dimensions: • 28-1/2" x 18" x 29" (724 x 457 x 737 mm)			020 White 021 Bone 222 Linen	417 522 522							
215DB.004	Cadet Pro – Round Front Toilet Less Seat 10" Rough-In Nominal Dimensions: • 26-1/4" x 18" x 29" (667 x 457 x 737 mm)			020 White 021 Bone 222 Linen	354 445 445							
	Separate Components:											
3517C.101	Elongated bowl with two color-matched bolt caps	51 lbs (23 kg)	1.83	020 White 021 Bone 222 Linen	220 273 273							
3517D.101	Round front bowl with two color-matched bolt caps	51 lbs (23 kg)	1.67	020 White 021 Bone 222 Linen	157 196 196							
4188B.004	1.6 gpf/6.0 Lpf 10" (254 mm) rough-in tank complete with coupling components and tank trim	30 lbs (14 kg)	0.76	020 White 021 Bone 222 Linen	197 249 249							
735173-400	Tank cover		0.35	020 White 021 Bone 222 Linen	80 92 92							
⊳7381231-200.XXX0A	LH trip lever (specify finish) – Chrome supplies	0.46 lbs (0.21 kg)	0.02	002 Polished Chrome 013 Polished Nickel 020 White 099 Polished Brass 224 ORB 278 Legacy Bronze 295 Brushed Nickel	32 39 38 38 58 94 46							
	Recommended Seats (sold separately):			· I								
5257A.65MT	Elongated slow-close seat and cover	3.4 lbs (1.5 kg)	0.24	020 White 021 Bone 222 Linen	51 56 56							
5259B.65MT	Round front slow-close seat and cover	3.0 lbs (1.36 kg)	0.24	020 White 021 Bone	46 51 51							
				222 Linen	For other seat options see pages 284-290. For additional tanks see page 293.							

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

 \diamond Check local codes to determine if 1.6 gpf/6.0 Lpf toilets are allowed in your area.

ORB (Oil Rubbed Bronze) > Parts Program (Non-Premier)

Two-Piece Toilets

American Standard

High Efficiency, Low Consumption – Full Flush (1.6 gpf/6.0 Lpf) – Conserving Flush (1.1 gpf/4.2 Lpf)

Two-Piece Toilets Vitreous China	DESCRIPTION						
	Edgemere - Dual Flush - Right Height® Image: CEC Elongated Toilet Less Seat - 12" Rough-In Image: CEC • Combination bowl and tank, less seat 12" (305 mm) rough-in • High efficiency, low consumption, full flush (1.6 gpf/6.0 Lpf), conserving flush (1.1 gpf/4.2 Lpf) • Meets EPA WaterSense® criteria • PowerWash® rim scrubs bowl with each flush • Chrome trip lever • Includes EZ-Install Tools • EverClean® Antimicrobial Surface • 16-1/2" (419 mm) rim height for accessible application • 2" (51 mm) fully glazed trapway • 9" x 8" (229 x 203 mm) water surface area • Five-year warranty (see full warranty on page 553) • Design coordinates with Edgemere suite						
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE		
204AA200	Edgemere – Dual Flush – Right Height Elongated Toilet Less Seat – 12" Rough-In Nominal Dimensions: • 30-3/16" x 17" x 31-1/8" (767 x 432 x 790 mm)			020 White	338		
	Separate Components:	1					
3519A101	Right Height elongated bowl with two color-matched bolt caps	55 lbs (25 kg)	1.83	020 White	175		
4519A200	Dual flush tank complete with coupling components and tank trim	28 lbs (12.7 kg)	0.73	020 White	163		
735215-400	Tank cover		0.59	020 White	58		
⊳ 7381092-202.XXX0A	Rectangular, top-of-tank, push button actuator – Chrome supplied	0.22 lbs (0.10 kg)	0.01	002 Polished Chrome	6		
	Recommended Seat (sold separately):	1					
5257A.65MT	Elongated slow-close seat and cover	3.4 lbs (1.5 kg)	0.24	020 White	51		
~							

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

American Standard

High Efficiency, Low Consumption – Full Flush (1.6 gpf/6.0 Lpf) – Conserving Flush (1.1 gpf/4.2 Lpf)

Two-Piece Toilets Vitreous China	DESCRIPTION						
	Edgemere - Dual Flush - Right Height® Image: CEC Round Front Toilet Less Seat - 12" Rough-In Image: CEC • Combination bowl and tank, less seat 12" (305 mm) rough-in • High efficiency, low consumption, full flush (1.6 gpf/6.0 Lpf), conserving flush (1.1 gpf/4.2 Lpf) • Meets EPA WaterSense® criteria • PowerWash® rim scrubs bowl with each flush • Chrome trip lever • Includes EZ-Install Tools • EverClean® Antimicrobial Surface • 16-1/2" (419 mm) rim height for accessible application • 2" (51 mm) fully glazed trapway • 9" x 8" (229 x 203 mm) water surface area • Five-year warranty (see full warranty on page 553) • Design coordinates with Edgemere suite						
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price		
204BA200	Edgemere – Dual Flush – Right Height Round Front Toilet Less Seat 12" Rough-in Nominal Dimensions: • 28-3/16" x 17" x 31-1/8" (717 x 432 x 790 mm)			020 White	298		
	Separate Components:			1			
3519B101	Right Height round front bowl with two color-matched bolt caps	55 lbs (25 kg)	1.66	020 White	135		
4519A200	Dual flush tank complete with coupling components and tank trim	28 lbs (12.7 kg)	0.73	020 White	163		
735215-400	Tank cover		0.59	020 White	58		
⊳ 7381092-202.XXX0A	Rectangular, top-of-tank, push button actuator – Chrome supplied	0.22 lbs (0.10 kg)	0.01	002 Polished Chrome	6		
	Recommended Seat (sold separately):						
5259B.65MT	Round front slow-close seat and cover	3.0 lbs (1.36 kg)	0.24	020 White	46		
SR	For other seat options see pages 284-290.			I			

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

 \triangleright Parts Program (Non-Premier)

Two-Piece Toilets

American Standard

「wo-Piece Toilets /itreous China	DESCRIPTION						
	Edgemere – Right Height [®] Elongated Toilet Less Seat – 12" Rougl	h-In			CEC		
	 Combination bowl and tank, less seat 12" (305 mm) rough-in High efficiency, ultra-low consumption (1.28 g Meets EPA WaterSense® criteria PowerWash® rim scrubs bowl with each flush Chrome trip lever Includes EZ-Install Tools EverClean® Antimicrobial Surface 16-1/2" (419 mm) rim height for accessible ap 2" (51 mm) fully glazed trapway 9" x 8" (229 x 203 mm) water surface area 3" (76 mm) flush valve Five-year warranty (see full warranty on page Design coordinates with Edgemere suite of fix 	oplication 553)	utilizes 2	20% less water			
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price		
204AA.104	Edgemere – Right Height Elongated Toilet Less Seat – 12" Rough-In Nominal Dimensions: • 30-3/16" x 17" x 31-1/8" (767 x 432 x 790 mm)			020 White	275		
204AA.105	Same as above with trip lever on right-hand side			020 White	280		
	Separate Components:						
3519A.101	Right Height elongated bowl with two color-matched bolt caps	55 lbs (25 kg)	1.83	020 White	175		
4519A.104	1.28 gpf/4.8 Lpf tank complete with coupling components and tank trim	28 lbs (12.7 kg)	0.73	020 White	100		
4519A.105	1.28 gpf/4.8 Lpf tank complete with coupling components, tank trim and trip lever on right-hand side		0.91	020 White	105		
735214-400	Tank cover		0.75	020 White	59		
⊳7381741-200.XXX0A	LH trip lever (specify finish) – Chrome supplied	0.28 lbs (0.13 kg)	0.02	002 Polished Chrome 278 Legacy Bronze 295 Brushed Nickel	35 67 51		
⊳7381232-201.XXX0A	RH trip lever	0.44 lbs (0.20 kg)	0.06	002 Polished Chrome 295 Brushed Nickel	30 47		
	Recommended Seat (sold separately):			11			
5257A.65MT	Elongated slow-close seat and cover	3.4 lbs (1.5 kg)	0.24	020 White 021 Bone 222 Linen	51 56 56		
SR							

ADA When installed with seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

American Standard

wo-Piece Toilets /itreous China	DESCRIPTION						
	Edgemere – Right Height® Round Front Toilet Less Seat – 12" Rou • Combination bowl and tank, less seat • 12" (305 mm) rough-in • High efficiency, ultra-low consumption (1.28 g • Meets EPA WaterSense® criteria • PowerWash® rim scrubs bowl with each flush • Chrome trip lever • Includes EZ-Install Tools • EverClean® Antimicrobial Surface • 16-1/2" (419 mm) rim height for accessible ap 2" (51 mm) fully glazed trapway • 9" x 8" (229 x 203 mm) water surface area • 3" (76 mm) flush valve • Five-year warranty (see full warranty on page • Design coordinates with Edgemere suite of fize	gpf/4.8 Lpf), oplication 553)	utilizes 2	20% less water	CEG		
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price		
204BA.104	Edgemere – Right Height Round Front Toilet Less Seat 12" Rough-In Nominal Dimensions: • 28-3/16" x 17" x 31-1/8" (716 x 432 x 790 mm)			020 White	235		
204BA.105	Same as above with trip lever on right-hand side			020 White	240		
	Separate Components:			1			
3519B.101	Right Height round front bowl with two color-matched bolt caps	55 lbs (25 kg)	1.66	020 White	135		
4519A.104	1.28 gpf/4.8 Lpf tank complete with coupling components and tank trim	28 lbs (12.7 kg)	0.73	020 White	100		
4519A.105	1.28 gpf/4.8 Lpf tank complete with coupling components, tank trim and trip lever on right-hand side		0.91	020 White	105		
735214-400	Tank cover		0.75	020 White	59		
⊳ 7381741-200.XXX0A	LH trip lever (specify finish) – Chrome supplied	0.28 lbs (0.13 kg)	0.02	002 Polished Chrome 278 Legacy Bronze 295 Brushed Nickel	35 67 51		
⊳7381232-201.XXX0A	RH trip lever	0.44 lbs (0.20 kg)	0.01	002 Polished Chrome 295 Brushed Nickel	30 47		
	Recommended Seat (sold separately):						
5259B.65MT	Round front slow-close seat and cover	3.0 lbs (1.28 kg)	0.24	020 White 021 Bone 222 Linen	46 51 51		
-				1	1		

ADA When installed with seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

American Standard

Two-Piece Toilets /itreous China	DESCRIPTION					
	Edgemere – Right Height® Elongated Toilet Less Seat – 10" Rough • Combination bowl and tank, less seat • 10" (254 mm) rough-in • High efficiency, ultra-low consumption (1.28 g • Meets EPA WaterSense® criteria • PowerWash® rim scrubs bowl with each flush • Chrome trip lever • Includes EZ-Install Tools • EverClean® Antimicrobial Surface • 16-1/2" (419 mm) rim height for accessible ap • 2" (51 mm) fully glazed trapway • 9" x 8" (229 x 203 mm) water surface area • 3" (76 mm) flush valve • Five-year warranty (see full warranty on page • Design coordinates with Edgemere suite	gpf/4.8 Lpf), oplication	utilizes 2	20% less water	CEC	
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price	
204AB104	Edgemere – Right Height Elongated Toilet Less Seat – 10" Rough-In			020 White	333	
	Nominal Dimensions: • 28-3/16" x 18-7/8" x 30-5/16" (716 x 479 x 790 mm)					
	Separate Components:			11		
3519A101	Right Height elongated bowl with two color-matched bolt caps	55 lbs (25 kg)	1.83	020 White	175	
4519B104	1.28 gpf/4.8 Lpf tank complete with coupling components and tank trim	27 lbs (12.2 kg)	0.76	020 White	160	
735213-400	Tank cover		0.59	020 White	56	
⊳7381741-200.XXX0A	LH Trip lever (specify finish) – Chrome supplied	0.28 lbs (0.13 kg)	0.02	002 Polished Chrome 278 Legacy Bronze 295 Brushed Nickel	35 67 51	
	Recommended Seat (sold separately):					
5257A.65MT	Elongated slow-close seat and cover	3.4 lbs (1.5 kg)	0.24	020 White	51	
				1		

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

Two-Piece Toilets

American Standard

Two-Piece Toilets /itreous China	DESCRIPTION					
	Edgemere - Right Height® Round Front Toilet Less Seat - 10" Rough-In • Combination bowl and tank, less seat • 10" (254 mm) rough-in • High efficiency, ultra-low consumption (1.28 gpf/4.8 Lpf), utilizes 20% less water • Meets EPA WaterSense® criteria • PowerWash® rim scrubs bowl with each flush • Chrome trip lever • Includes EZ-Install Tools • EverClean® Antimicrobial Surface • 16-1/2" (419 mm) rim height for accessible application • 2" (51 mm) fully glazed trapway • 9" x 8" (229 x 203 mm) water surface area • 3" (76 mm) flush valve • Five-year warranty (see full warranty on page 553) • Design coordinates with Edgemere suite					
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price	
204BB104	Edgemere – Right Height Round Front Toilet Less Seat 10" Rough-In Nominal Dimensions: • 26-3/16" x 18-7/8" x 30-5/16" (665 x 479 x 790 mm)			020 White	293	
	Separate Components:			1		
3519B101	Right Height round front bowl with two color-matched bolt caps	52 lbs (23.6 kg)	1.66	020 White	135	
4519B104	1.28 gpf/4.8 Lpf tank complete with coupling components and tank trim	27 lbs (12.2 kg)	0.76	020 White	160	
735213-400	Tank cover		0.59	020 White	56	
⊳ 7381741-200.XXX0A	LH Trip lever (specify finish) – Chrome supplied	0.28 lbs (0.13 kg)	0.02	002 Polished Chrome 278 Legacy Bronze 295 Brushed Nickel	35 67 51	
	Recommended Seat (sold separately):					
5259B.65MT	Round front slow-close seat and cover	3.0 lbs (1.28 kg)	0.24	020 White	46	
SR						

 \overleftarrow{ADA} When installed with seat, and top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

American Standard

wo-Piece Toilets /itreous China	DESCRIPTION					
	Colony – Right Height® – Elongated Toi 12" Rough-In Combination bowl and tank, less seat 12" (305 mm) rough-in 16-1/2" (419 mm) rim height for accessible ap High efficiency, ultra-low consumption (1.28 g Meets EPA WaterSense® criteria Elongated siphon action bowl with direct fed j 2" (51 mm) trapway 9" x 8" (229 x 203 mm) water surface area 2" (51 mm) flapper flush valve Color-matched trip lever Two color-matched bolt caps Two-year warranty (see full warranty on page	oplication gpf/4.8 Lpf), jet and exce	utilizes 2		CEO	
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price	
221AA.104	Colony – Right Height – Elongated Toilet Less Seat – 12" Rough-In Nominal Dimensions: • 29-3/4" x 19-3/16" x 30-7/8" (756 x 488 x 784 mm)			020 White 021 Bone 222 Linen	263 330 330	
221AA.105	 Same as above with trip lever on right-hand side 			020 White	274	
	Separate Components:					
3251A.101	Right Height elongated bowl with two color-matched bolt caps. For use with 1.6 gpf/6.0 Lpf and 1.28 gpf/4.8 Lpf tanks	45 lbs (20 kg)	1.83	020 White 021 Bone 222 Linen	174 219 219	
4192A.104	1.28 gpf/4.8 Lpf tank complete with coupling components and tank trim	27 lbs (12 kg)	0.76	020 White 021 Bone 222 Linen	89 111 111	
735189-400	Tank cover (specify color)		0.42	020 White 021 Bone 222 Linen	59 74 74	
⊳7381004-XXX0A	LH trip lever (specify finish)	0.66 lbs (0.30 kg)	0.01	002 Polished Chrome 020 White 021 Bone 222 Linen	21 21 26 26	
⊳ 738171-XXX0A	RH trip lever	0.66 lbs (0.30 kg)	0.01	002 Polished Chrome 020 White	21 21	
4192A.154	1.28 gpf/4.8 Lpf 12" (305 mm) tank with Aquaguard liner	27 lbs (12 kg)	0.76	020 White 021 Bone 222 Linen	134 166 166	
4192A.105	1.28 gpf/4.8 Lpf 12" (305 mm) tank with trip lever on right-hand side	27 lbs (12 kg)	0.76	020 White	100	
	Recommended Seats (sold separately):					
5257A.65MT	Elongated slow-close seat and cover	3.4 lbs (1.5 kg)	0.24	020 White 021 Bone 222 Linen	51 56 56	

 \overrightarrow{ADA} When installed with seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

American Standard

Colony®

Two-Piece Toilets Vitreous China	DES	SCRIPTION			
\$	 Colony - Right Height[®] - Elongated Toilets Less Seat 12" Rough-In Combination bowl and tank, less seat Low consumption (1.6 gpf/6.0 Lpf) 12" (305 mm) rough-in 16-1/2" (419 mm) rim height for accessible application Elongated siphon action bowl with direct fed jet and excellent rim wash 2" (51 mm) trapway 9" x 8" (229 x 203 mm) water surface area 2" (51 mm) flapper flush valve Color-matched trip lever Two color-matched bolt caps Two-year warranty (see full warranty on page 553) 				
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price
221AA.004	Colony – Right Height Elongated Toilet Less Seat – 12" Rough-In Nominal Dimensions: • 29-3/4" x 19-3/16" x 30-7/8" (756 x 488 x 784 mm)			020 White 021 Bone 222 Linen	263 330 330
221AA.005	 Same as above with trip lever on right-hand side 			020 White	274
	Separate Components:				
3251A.101	Right Height elongated bowl with two color-matched bolt caps. For use with 1.6 gpf/6.0 Lpf and 1.28 gpf/4.8 Lpf tanks	45 lbs (20 kg)	1.83	020 White 021 Bone 222 Linen	174 219 219
4192A.004	1.6 gpf/6.0 Lpf tank complete with coupling components and tank trim	27 lbs (12 kg)	0.76	020 White 021 Bone 222 Linen	89 111 111
735189-400	Tank cover		0.42	020 White 021 Bone 222 Linen	59 74 74
⊳ 7381004-XXX0A	LH trip lever (specify finish)	0.66 lbs (0.30 kg)	0.01	002 Polished Chrome 020 White 021 Bone 222 Linen	21 21 26 26
⊳ 738171-XXX0A	RH trip lever	0.66 lbs (0.30 kg)	0.01	002 Polished Chrome 020 White	21 21
4192A.005	1.6 gpf/6.0 Lpf 12" (305 mm) tank with trip lever on right-hand side	27 lbs (12 kg)	0.76	020 White	100
	Recommended Seats (sold separately):				
5257A.65MT	Elongated slow-close seat and cover	3.4 lbs (1.5 kg)	0.24	020 White 021 Bone 222 Linen	51 56 56
5311.012	Laurel elongated molded wood seat and cover	7 lbs (3.2 kg)	0.21	020 White	42
	For other seat options see pages 284-290. For a	additional ta	nks see	page 294.	

 \dot{ADA} When installed with seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

American Standard

Two-Piece Toilets Vitreous China	DESCRIPTION						
	Colony – Right Height [®] – Elongated Toi 10" Rough-In • Combination bowl and tank, less seat • 10" (254 mm) rough-in • 16-1/2" (419 mm) rim height for accessible ap • High efficiency, ultra-low consumption (1.28 g • Meets EPA WaterSense [®] criteria • Elongated siphon action bowl with direct fed • 2" (51 mm) trapway 9" x 8" (229 x 203 mm) water surface area • 2" (51 mm) flapper flush valve • Color-matched trip lever • Two color-matched bolt caps • Two-year warranty (see full warranty on page	oplication gpf/4.8 Lpf), jet and exce	utilizes 2		CEO		
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE		
221AB.104	Colony – Right Height Elongated Toilet Less Seat – 10" Rough-In Nominal Dimensions: • 27-13/16" x 18-11/16" x 31" (706 x 474 x 788 mm)			020 White 021 Bone 222 Linen	329 413 413		
221AB.105	 Same as above with trip lever on right-hand side 			020 White	348		
	Separate Components:						
3251A.101	Right Height elongated bowl with two color-matched bolt caps. For use with 1.6 gpf/6.0 Lpf and 1.28 gpf/4.8 Lpf tanks	45 lbs (20.4 kg)	1.83	020 White 021 Bone 222 Linen	174 219 219		
4192B.104	1.28 gpf/4.8 Lpf tank complete with coupling components and tank trim	27 lbs (12 kg)	0.54	020 White 021 Bone 222 Linen	155 194 194		
735190-400	Tank cover		0.42	020 White 021 Bone 222 Linen	62 79 79		
⊳ 7381004-XXX0A	LH trip lever (specify finish)	0.66 lbs (0.30 kg)	0.01	002 Polished Chrome 020 White 021 Bone 222 Linen	21 21 26 26		
⊳738171-XXX0A	RH trip lever	0.66 lbs (0.30 kg)	0.01	002 Polished Chrome 020 White	21 21		
4192B.105	1.28 gpf/4.8 Lpf 10" (254 mm) tank with trip lever on right-hand side	27 lbs (12 kg)	0.54	020 White	174		
	Recommended Seats (sold separately):						
5257A.65MT	Elongated slow-close seat and cover	3.4 lbs (1.5 kg	0.24	020 White 021 Bone 222 Linen	51 56 56		
5311.012	Laurel elongated molded wood seat	7 lbs	0.21	020 White	42		

 \overrightarrow{ADA} When installed with seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

American Standard

Two-Piece Toilets Vitreous China	DESCRIPTION					
vireous crima	Colony – Right Height [®] – Elongated Toi Combination bowl and tank, less seat Low consumption (1.6 gpf/6.0 Lpf) 10" (254 mm) rough-in 16-1/2" (419 mm) rim height for accessible ap Elongated siphon action bowl with direct fed 2" (51 mm) trapway 9" x 8" (229 x 203 mm) water surface area 2" (51 mm) flapper flush valve Color-matched trip lever Two color-matched bolt caps Two-year warranty (see full warranty on page	pplication jet and exce		-		
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price	
221AB.004	Colony – Right Height Elongated Toilet Less Seat – 10" Rough-In Nominal Dimensions: • 27-13/16" x 18-11/16" x 31" (706 x 474 x 788 mm)			020 White 021 Bone 222 Linen	329 413 413	
	Separate Components:			1		
3251A.101	Right Height elongated bowl with two color-matched bolt caps. For use with 1.6 gpf/6.0 Lpf and 1.28 gpf/4.8 Lpf tanks	45 lbs (20.4 kg)	1.83	020 White 021 Bone 222 Linen	174 219 219	
4192B.004	1.6 gpf/6.0 Lpf tank complete with coupling components and tank trim	27 lbs (12 kg)	0.54	020 White 021 Bone 222 Linen	155 194 194	
735190-400	Tank cover		0.42	020 White 021 Bone 222 Linen	62 79 79	
⊳7381004-XXX0A	LH trip lever (specify finish)	0.66 lbs (0.30 kg)	0.01	002 Polished Chrome 020 White 021 Bone 222 Linen	21 21 26 26	
	Recommended Seats (sold separately):					
5257A.65MT	Elongated slow-close seat and cover	3.4 lbs (1.5 kg)	0.24	020 White 021 Bone 222 Linen	51 56 56	
5311.012	Laurel elongated molded wood seat and cover	7 lbs (3.2 kg)	0.21	020 White	42	
	For other seat options see pages 284-290. For	additional ta	nks see j	page 294.		

ADA When installed with seat, top of seat is 17" to 19" (432 to 483 mm) from the finished floor.

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

▷ Parts Program (Non-Premier)

 \diamond Check local codes to determine if 1.6 gpf/6.0 Lpf toilets are allowed in your area.

American Standard

Colony – Elongated Toilet Less Seat – 1 • Combination bowl and tank, less seat				
 High efficiency, ultra-low consumption (1.28 g) Meets EPA WaterSense® criteria 12" (305 mm) rough-in Siphon action bowl with direct fed jet and exc 2" (51 mm) trapway 9" x 8" (229 x 203 mm) water surface area 2" (51 mm) flapper flush valve Color-matched trip lever Two color-matched bolt caps 	gpf/4.8 Lpf), eellent rim wa	utilizes 2	20% less water	CEO
PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price
Colony – Elongated Toilet Less Seat 12" Rough-In Nominal Dimensions: • 29-3/4" x 19-3/16" x 29-3/8" (756 x 488 x 746 mm)			020 White 021 Bone 222 Linen	224 278 278
Separate Components:	<u> </u>		11	
Elongated bowl with two color-matched bolt caps. For use with 1.6 gpf/6.0 Lpf and 1.28 gpf/4.8 Lpf tanks	43 lbs (19.5 kg)	1.39	020 White 021 Bone 222 Linen	135 167 167
1.28 gpf/4.8 Lpf tank complete with coupling components and tank trim	27 lbs (12 kg)	0.76	020 White 021 Bone 222 Linen	89 111 111
Tank cover (specify color)		0.42	020 White 021 Bone 222 Linen	59 74 74
LH trip lever	0.66 lbs (0.30 kg)	0.01	002 Polished Chrome 020 White 021 Bone 222 Linen	21 21 26 26
RH trip lever	0.66 lbs (0.30 kg)	0.01	002 Polished Chrome 020 White	21 21
1.28 gpf/4.8 Lpf 12" (305 mm) tank with Aquaguard liner	27 lbs (12 kg)	0.76	020 White 021 Bone 222 Linen	134 166 166
1.28 gpf/4.8 Lpf 12" (305 mm) tank with trip lever on right-hand side	27 lbs (12 kg)	0.76	020 White	100
Available Seats (sold separately):				
Elongated slow-close seat and cover	3.4 lbs (1.5 kg)	0.24	020 White 021 Bone 222 Linen	51 56 56
Laurel elongated molded wood seat and cover	7 lbs (3.2 kg)	0.21	020 White	42
	 2" (51 mm) trapway 9" x 8" (229 x 203 mm) water surface area 2" (51 mm) flapper flush valve Color-matched trip lever Two color-matched bolt caps Two-year warranty (see full warranty on page PRODUCT Colony – Elongated Toilet Less Seat 12" Rough-In Nominal Dimensions: 29-3/4" x 19-3/16" x 29-3/8" (756 x 488 x 746 mm) Separate Components: Elongated bowl with two color-matched bolt caps. For use with 1.6 gpf/6.0 Lpf and 1.28 gpf/4.8 Lpf tanks 1.28 gpf/4.8 Lpf tanks 1.28 gpf/4.8 Lpf tank complete with coupling components and tank trim Tank cover (specify color) LH trip lever 1.28 gpf/4.8 Lpf 12" (305 mm) tank with Aquaguard liner 1.28 gpf/4.8 Lpf 12" (305 mm) tank with trip lever on right-hand side Available Seats (sold separately): Elongated slow-close seat and cover Eaver and cover	 2^{ir} (51 mm) trapway 9" x 8" (229 x 203 mm) water surface area 2" (51 mm) flapper flush valve Color-matched trip lever Two color-matched bolt caps Two-year warranty (see full warranty on page 553) PRODUCT PRODUCT NET WEIGHT Colony – Elongated Toilet Less Seat 12" Rough-In Nominal Dimensions: 9.3/4" x 19-3/16" x 29-3/8" (756 x 488 x 746 mm) Separate Components: 43 lbs (19.5 kg) Elongated bowl with two color-matched bolt caps. For use with 1.6 gpf/6.0 Lpf and 1.28 gpf/4.8 Lpf tanks 43 lbs (12 kg) 1.28 gpf/4.8 Lpf tank complete with coupling components and tank trim 27 lbs (12 kg) Tank cover (specify color) 0.66 lbs (0.30 kg) LH trip lever 0.66 lbs (0.30 kg) 1.28 gpf/4.8 Lpf 12" (305 mm) tank with Aquaguard liner 27 lbs (12 kg) 1.28 gpf/4.8 Lpf 12" (305 mm) tank with Aquaguard liner 27 lbs (12 kg) 1.28 gpf/4.8 Lpf 12" (305 mm) tank with trip lever on right-hand side 27 lbs (12 kg) Available Seats (sold separately): 27 lbs (12 kg) Elongated slow-close seat and cover 3.4 lbs (1.5 kg) I.28 gpf/4.8 Lpf 12" (305 mm) tank with trip lever on right-hand side 7 lbs (3.2 kg)	 2" (51 mm) trapway 9" x 8" (229 x 203 mm) water surface area 2" (51 mm) flapper flush valve Color-matched trip lever Two color-matched bolt caps Two-year warranty (see full warranty on page 553) PRODUCT NET WeiGHT PTS Colony – Elongated Toilet Less Seat 12" Rough-In PTS Colony – Elongated Toilet Less Seat 12" Rough-In PTS Separate Components: 29-3/4" x 19-3/16" x 29-3/8" (756 x 488 x 746 mm) 1.39 Separate Components: 27 lbs (19.5 kg) 0.76 L28 gpf/4.8 Lpf tanks 0.42 0.76 L128 gpf/4.8 Lpf tank complete with coupling components and tank trim 27 lbs (12 kg) 0.01 Tank cover (specify color) 0.42 0.42 LH trip lever 0.66 lbs (0.30 kg) 0.01 I.28 gpf/4.8 Lpf 12" (305 mm) tank with Aquaguard liner 27 lbs (12 kg) 0.76 I.28 gpf/4.8 Lpf 12" (305 mm) tank with trip lever on right-hand side 27 lbs (12 kg) 0.76 Available Seats (sold separately): 27 lbs (12 kg) 0.76 Laurel elongated molded wood seat and cover 3.4 lbs (1.5 kg) 0.24	 2" (G1 mm) trapway 9" x 8" (229 x 203 mm) water surface area 2" (G1 mm) flapper flush valve Color-matched bolt caps Two-oyear warranty (see full warranty on page 553) PRODUCT NET WeiGHT PTS ColoRS Colony - Elongated Toilet Less Seat 12" Rough-In Nominal Dimensions: 020 White 021 Bone 222 Linen 020 White 021 Bone 222 Linen Separate Components: Elongated bolt (ags pi/6.0 Lpf and 1.28) (15.5 kg) 1.39 020 White 021 Bone 222 Linen 1.28 gpf/4.8 Lpf tanks 27 lbs (12 kg) 0.76 020 White 021 Bone 222 Linen 1.28 gpf/4.8 Lpf tanks 27 lbs (12 kg) 0.76 020 White 021 Bone 222 Linen Tank cover (specify color) 0.42 020 White 021 Bone 222 Linen 0.76 Tank cover (specify color) 0.42 020 White 021 Bone 222 Linen LH trip lever 0.66 lbs (0.30 kg) 0.01 002 Polished Chrome 020 White 021 Bone 222 Linen L28 gpf/4.8 Lpf 12" (305 mm) tank with rip lever on right-hand side 27 lbs (12 kg) 0.76 020 White 021 Bone 222 Linen L28 gpf/4.8 Lpf 12" (305 mm) tank with rip lever on right-hand side 27 lbs (12 kg) 0.76 020 White 021 Bone 222 Linen L28 gpf/4.8 Lpf 12" (305 mm) tank with rip lever on right-hand side 27 lbs (12

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

 \triangleright Parts Program (Non-Premier)

American Standard

DES	SCRIPTION			
 Combination bowl and tank, less seat Low consumption (1.6 gpf/6.0 Lpf) 12" (305 mm) rough-in Siphon action bowl with direct fed jet and exc 2" (51 mm) trapway 9" x 8" (229 x 203 mm) water surface area 2" (51 mm) flapper flush valve Color-matched trip lever Two color-matched bolt caps 	cellent rim wa			
PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price
Colony – Elongated Toilet Less Seat 12" Rough-In Nominal Dimensions: • 29-3/4" x 19-3/16" x 29-3/8" (756 x 488 x 746 mm)			020 White 021 Bone 222 Linen	224 278 278
Separate Components:				
Elongated bowl with two color-matched bolt caps. For use with 1.6 gpf/6.0 Lpf and 1.28 gpf/4.8 Lpf tanks	43 lbs (19.5 kg)	1.39	020 White 021 Bone 222 Linen	135 167 167
1.6 gpf/6.0 Lpf tank complete with coupling components and tank trim	27 lbs (12 kg)	0.76	020 White 021 Bone 222 Linen	89 111 111
Tank cover		0.42	020 White 021 Bone 222 Linen	59 74 74
LH trip lever (specify finish)	0.66 lbs (0.30 kg)	0.01	002 Polished Chrome 020 White 021 Bone 222 Linen	21 21 26 26
RH trip lever	0.66 lbs (0.30 kg)	0.01	002 Polished Chrome 020 White	21 21
1.6 gpf/6.0 Lpf 12" (305 mm) tank with trip lever on right-hand side	27 lbs (12 kg)	0.76	020 White	100
Available Seats (sold separately):				
Elongated slow-close seat and cover	3.4 lbs (1.5 kg)	0.24	020 White 021 Bone 222 Linen	51 56 56
Laurel elongated molded wood seat	7 lbs	0.21	020 White	42
	Colony - Elongated Toilet Less Seat - • Combination bowl and tank, less seat • Low consumption (1.6 gpf/6.0 Lpf) • 12" (305 mm) rough-in • Siphon action bowl with direct fed jet and exc • 2" (51 mm) trapway • 9" x 8" (229 x 203 mm) water surface area • 2" (51 mm) trapway • Color-matched trip lever • Two color-matched bolt caps • Two-year warranty (see full warranty on page PRODUCT Colony - Elongated Toilet Less Seat 12" Rough-In Nominal Dimensions: • 29-3/4" x 19-3/16" x 29-3/8" (756 x 488 x 746 mm) Separate Components: Elongated bowl with two color-matched bolt caps. For use with 1.6 gpf/6.0 Lpf and 1.28 gpf/4.8 Lpf tanks 1.6 gpf/6.0 Lpf tank complete with coupling components and tank trim Tank cover LH trip lever (specify finish) RH trip lever (specify finish) RH trip lever 1.6 gpf/6.0 Lpf 12" (305 mm) tank with trip lever on right-hand side Available Seats (sold separately): Elongated slow-close seat and cover	Colony – Elongated Toilet Less Seat – 12" Rough • Combination bowl and tank, less seat • Combination bowl with direct fed jet and excellent rim weights in the surface area • 2" (51 mm) trapway 9" x 8" (229 x 203 mm) water surface area • 2" (51 mm) ftapper flush valve • Color-matched bolt caps • Two color-matched bolt caps • Two-year warranty (see full warranty on page 553) NET WEIGHT Color-matched bolt caps • Two-year warranty (see full warranty on page 553) NET WEIGHT Color-matched bolt caps • Two-year warranty (see full warranty on page 553) NET WEIGHT Color-matched bolt caps • Two-year warranty (see full warranty on page 553) PRODUCT NET WEIGHT Color-matched bolt caps • Two-year warranty (see full warranty on page 553) Separate Components: Elongated bowl with two color-matched bolt caps. For use with 1.6 gpf/6.0 Lpf and 1.2 gpf/4.8 Lpf tanks 43 lbs (19.5 kg) 1.6 gpf/6.0 Lpf tank complete with coupling components and tank trim 27 lbs (0.30 kg) Tank cover 0.66 lbs (0.30 kg) 1.4 trip lever (specify finish)	 Low consumption (1.6 gpt/6.0 Lpf) 12" (305 mm) rough-in Siphon action bowl with direct fed jet and excellent rim wash 2" (51 mm) trapway 9" x 8" (229 x 203 mm) water surface area 2" (51 mm) trapway 9" x 8" (229 x 203 mm) water surface area 2" (51 mm) trapway Color-matched boit caps Two color-matched boit caps Two-year warranty (see full warranty on page 553) Two-year warranty (see full warranty on page 553) Two-year warranty (see full warranty on page 553) Colony - Elongated Toilet Less Seat 12" Rough-In Nominal Dimensions: 29-3/4" x 19-3/16" x 29-3/8" (756 x 488 x 746 mm) Separate Components: Elongated bowl with two color-matched bolt caps. For use with 1.6 gpt/6.0 Lpf and 1.28 gpt/4.8 Lpf tanks 1.6 gpt/6.0 Lpf tank complete with coupling components and tank trim 1.6 gpt/6.0 Lpf tank complete with coupling components and tank trim Coloid (0.30 kg) Coloid (0.30 kg	Colony - Elongated Toilet Less Seat - 12" Rough-In Combination bowl and tank, less seat Low consumption (1.6 gpt/6.0 Lpf) • 12" (30 fmm) rough-In Siphon action bowl with direct fed jet and excellent rim wash • 2" (51 mm) frapway • 28 v 203 mm) water surface area • 28 v (23 2x 203 mm) water surface area • 28 v (251 mm) frapper flush valve • Color-matched tip lever • Two color-matched bolt caps • Two-year warranty (see full warranty on page 553)PTSCoLORSColony - Elongated Toilet Less Seat 12" Rough-In Nominal Dimensions: • 29-34" x 19-3416" x 29-3/8" (756 x 488 x 746 mm)PTSCoLORSSeparate Components: Elongated bowl with two color-matched bolt caps, For use with 1.6 gpt/6.0 Lpf and 1.28 gpt/4.8 Lpf tanks43 lbs (19.5 kg)1.39020 White 021 Bone 222 Linen1.6 gpt/6.0 Lpf tank complete with coupling components and tank trim27 lbs (19.5 kg)0.76020 White 021 Bone 222 Linen1.4 trip lever (specify finish)0.66 lbs (0.30 kg)0.42020 White 021 Bone 222 Linen1.4 trip lever (specify finish)27 lbs (12 kg)0.76020 White 021 Bone 222 Linen1.4 trip lever (specify finish)27 lbs (12 kg)0.76020 White 021 Bone 222 Linen1.6 gpt/6.0 Lpf 12" (305 mm) tank with trip lever on right-hand side27 lbs (12 kg)0.76020 White 021 Bone 222 Linen1.6 gpt/6.0 Lpf 12" (305 mm) tank with trip lever on right-hand side27 lbs (12 kg)0.76020 White 021 Bone 222 Linen1.6 gpt/6.0 Lpf 12" (305 mm) tank with trip lever on right-hand side27 lbs (12 kg)0.76020 Wh

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

 \diamond Check your local codes to determine if 1.6 gpf/6.0 Lpf toilets are allowed in your area.



Two-Piece Toilets Vitreous China	DE	SCRIPTION			
	Colony – Elongated Toilet Less Seat – • • Combination bowl and tank, less seat • High efficiency, ultra-low consumption (1.28 g • Meets EPA WaterSense® criteria • 10" (254 mm) rough-in • Siphon action bowl with direct fed jet and exc • 2" (51 mm) trapway • 9" x 8" (229 x 203 mm) water surface area • 2" (51 mm) flapper flush valve • Color-matched trip lever • Two color-matched bolt caps • Two-year warranty (see full warranty on page	gpf/4.8 Lpf), cellent rim wa	utilizes 20	0% less water	CEO
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE
221CB.104	Colony – Elongated Toilet Less Seat 10" Rough-In Nominal Dimensions: • 27-13/16" x 18-11/16" x 29-1/2" (706 x 474 x 750 mm)			020 White 021 Bone 222 Linen	290 361 361
	Separate Components:	1		1	1
3251C.101	Elongated bowl with two color-matched bolt caps. For use with 1.6 gpf/6.0 Lpf and 1.28 gpf/4.8 Lpf tanks	43 lbs (19.5 kg)	1.39	020 White 021 Bone 222 Linen	135 167 167
4192B.104	1.28 gpf/4.8 Lpf tank complete with coupling components and tank trim	27 lbs (12 kg)	0.54	020 White 021 Bone 222 Linen	155 194 194
735190-400	Tank cover		0.42	020 White 021 Bone 222 Linen	62 79 79
⊳7381004-XXX0A	LH trip lever (specify finish)	0.66 lbs (0.30 kg)	0.01	002 Polished Chrome 020 White 021 Bone 222 Linen	21 21 26 26
⊳738171-XXX0A	RH trip lever	0.66 lbs (0.30 kg)	0.01	002 Polished Chrome 020 White	21 21
4192B.105	1.28 gpf/4.8 Lpf 10" (254 mm) tank with trip lever on right-hand side	27 lbs (12 kg)	0.54	020 White	174
	Available Seats (sold separately):			1	
5257A.65MT	Elongated slow-close seat and cover	3.4 lbs (1.5 kg)	0.24	020 White 021 Bone 222 Linen	51 56 56
5311.012	Laurel elongated molded wood seat and cover	7 lbs (3.2 kg)	0.21	020 White	42
	For other seat options see pages 284-290. For	additional ta	nks see p	age 294.	1

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

American Standard

blony – Elongated Toilet Less Seat – 1 Combination bowl and tank, less seat Low consumption (1.6 gpf/6.0 Lpf) 10" (254 mm) rough-in Siphon action bowl with direct fed jet and exc 2" (51 mm) trapway 9" x 8" (229 x 203 mm) water surface area 2" (51 mm) flapper flush valve Color-matched trip lever Two color-matched bolt caps Two-year warranty (see full warranty on page PRODUCT Diony – Elongated Toilet Less Seat "Rough-In ominal Dimensions: 27-13/16" x 18-11/16" x 29-1/2" (706 x 474 x 750 mm)	cellent rim wa		COLORS	
blony – Elongated Toilet Less Seat " Rough-In ominal Dimensions: 27-13/16" x 18-11/16" x 29-1/2"		PTS	COLORS	
" Rough-In ominal Dimensions: 27-13/16" x 18-11/16" x 29-1/2"				LIST Price
			020 White 021 Bone 222 Linen	290 361 361
eparate Components				
ongated bowl with two color-matched bolt ps. For use with 1.6 gpf/6.0 Lpf and 28 gpf/4.8 Lpf tanks	43 lbs (19.5 kg)	1.39	020 White 021 Bone 222 Linen	135 167 167
6 gpf/6.0 Lpf tank complete with upling components and tank trim	27 lbs (12 kg)	0.54	020 White 021 Bone 222 Linen	155 194 194
ink cover		0.42	020 White 021 Bone 222 Linen	62 79 79
ł trip lever (specify finish)	0.66 lbs (0.30 kg)	0.01	002 Polished Chrome 020 White 021 Bone 222 Linen	21 21 26 26
vailable Seats (sold separately):			· · · · · · · · · · · · · · · · · · ·	
ongated slow-close seat and cover	3.4 lbs (1.5 kg)	0.24	020 White 021 Bone 222 Linen	51 56 56
urel elongated molded wood seat d cover	7 lbs (3.2 kg)	0.21	020 White	42
	additional ta	nks see	bage 294.	
0	ailable Seats (sold separately): Ingated slow-close seat and cover Image: SR Image Irel elongated molded wood seat d cover	(0.30 kg) ailable Seats (sold separately): ailable Seats (sold separatel	(0.30 kg) (0.30 kg) (0.24 (1.5 kg) (0.24 (1.5 kg) (0.21 (3.2 kg) (0.21	(0.30 kg) 020 White 021 Bone 222 Linen ailable Seats (sold separately): ailable Seats (sold seat ailable Seats (sold seat ailable Seats (sold seats ailable Seats (sold

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

▷ Parts Program (Non-Premier)

 \diamond Check your local codes to determine if 1.6 gpf/6.0 Lpf toilets are allowed in your area.

American Standard

DESCRIPTION							
 Combination bowl and tank, less seat High efficiency, ultra-low consumption (1.28 Meets EPA WaterSense® criteria 12" (305 mm) rough-in Siphon action bowl with direct fed jet and exe 2" (51 mm) trapway 9" x 8" (229 x 203 mm) water surface area 2" (51 mm) flapper flush valve Color-matched trip lever Two color-matched bolt caps 	gpf/4.8 Lpf), cellent rim wa	utilizes 20)% less water	CEO			
PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price			
Colony – Round Front Toilet Less Seat 12" Rough-In Nominal Dimensions: • 27-13/16" x 19-3/16" x 29-3/8" (706 x 488 x 746 mm)			020 White 021 Bone 222 Linen	184 227 227			
Separate Components:							
Round front bowl with two color-matched bolt caps. For use with 1.6 gpf/6.0 Lpf and 1.28 gpf/4.8 Lpf tanks	42 lbs (19 kg)	1.27	020 White 021 Bone 222 Linen	95 116 116			
1.28 gpf/4.8 Lpf tank complete with coupling components and tank trim	27 lbs (12 kg)	0.76	020 White 021 Bone 222 Linen	89 111 111			
Tank cover		0.42	020 White 021 Bone 222 Linen	59 74 74			
LH trip lever (specify finish)	0.66 lbs (0.30 kg)	0.01	002 Polished Chrome 020 White 021 Bone 222 Linen	21 21 26 26			
RH trip lever	0.66 lbs (0.30 kg)	0.01	002 Polished Chrome 020 White	21 21			
1.28 gpf/4.8 Lpf 12" (305 mm) tank with Aquaguard liner	27 lbs (12 kg)	0.76	020 White 021 Bone 222 Linen	134 166 166			
1.28 gpf/4.8 Lpf 12" (305 mm) tank with trip lever on right-hand side	27 lbs (12 kg)	0.76	020 White	100			
Recommended Seats (sold separately):							
Round front slow-close seat and cover	3.0 lbs (1.28 kg)	0.24	020 White 021 Bone 222 Linen	46 51 51			
	 Combination bowl and tank, less seat High efficiency, ultra-low consumption (1.28 Meets EPA WaterSense® criteria 12" (305 mm) rough-in Siphon action bowl with direct fed jet and exe 2" (51 mm) trapway 9" x 8" (229 x 203 mm) water surface area 2" (51 mm) flapper flush valve Color-matched trip lever Two color-matched bolt caps Two-year warranty (see full warranty on page Two-year warranty (see full warranty on page 27-13/16" x 19-3/16" x 29-3/8" (706 x 488 x 746 mm) Separate Components: Round front bowl with two color-matched bolt caps. For use with 1.6 gpf/6.0 Lpf and 1.28 gpf/4.8 Lpf tanks 1.28 gpf/4.8 Lpf tank complete with coupling components and tank trim Tank cover LH trip lever (specify finish) RH trip lever (specify finish) RECommended Seats (sold separately): Round front slow-close seat and cover 	 Combination bowl and tank, less seat High efficiency, ultra-low consumption (1.28 gpf/4.8 Lpf), Meets EPA WaterSense® criteria 12" (305 mm) rough-in Siphon action bowl with direct fed jet and excellent rim wate 2" (51 mm) trapway 9" x 8" (229 x 203 mm) water surface area 2" (51 mm) flapper flush valve Color-matched trip lever Two color-matched bolt caps 27-13/16" x 19-3/16" x 29-3/8" (706 x 488 x 746 mm) Separate Components: Round front bowl with two color-matched bolt caps. For use with 1.6 gpf/6.0 Lpf and 1.28 gpf/4.8 Lpf tanks 1.28 gpf/4.8 Lpf tank complete with coupling components and tank trim LH trip lever (specify finish) 0.66 lbs (0.30 kg) 1.28 gpf/4.8 Lpf 12" (305 mm) tank with Arquaguard liner 1.28 gpf/4.8 Lpf 12" (305 mm) tank with trip lever on right-hand side Recommended Seats (sold separately): Round front slow-close seat and cover 3.0 lbs (1.28 kg) 	 High efficiency, ultra-low consumption (1.28 gpt/4.8 Lpf), utilizes 20 Meets EPA WaterSense® criteria 12" (305 mm) rough-in Siphon action bowl with direct fed jet and excellent rim wash 2 ° (51 mm) trapway 9" x 8" (229 x 203 mm) water surface area 2" (51 mm) flapper flush valve Color-matched bolt caps Two-ore-matched bolt caps Two-year warranty (see full warranty on page 553) Two-year warranty (see full warranty on page 553) Colony – Round Front Toilet Less Seat 12" Rough-In Nominal Dimensions: 2.7-13/16" x 19-3/16" x 29-3/8" (706 x 488 x 746 mm) Separate Components: Round front bowl with two color-matched bolt caps. For use with 1.6 gpf/6.0 Lpf and 1.28 gpf/4.8 Lpf tank complete with color-matched bolt caps. For use with 1.6 gpf/6.0 Lpf and 1.28 gpf/4.8 Lpf tank complete with (12 kg) 1.28 gpf/4.8 Lpf tank complete with (0.30 kg) Color flow color flow of the page flow of the p	 Combination bowl and tank, less seat High efficiency, ultra-low consumption (1.28 gpf/4.8 Lpf), utilizes 20% less water Weets EPA WaterSense[®] criteria 12° (305 mm) rough-in Siphon action bowl with direct fed jet and excellent rim wash 2° (51 mm) trapway 9° x 8° (229 x 203 mm) water surface area 2° (51 mm) flapper flush valve Color-matched bolt caps Two-color-matched bolt caps Two-year warranty (see full warranty on page 553) PRODUCT NET WEIGHT PTS Colors Color-matched trip lever 020 White 021 White 2.7 (31 fls' x 19-3/16° x 29-3/8° 22 Linen 020 White 2.7 (31 fls' x 19-3/16° x 29-3/8° 22 Linen 020 White Vote se with 1.6 gpf/6.0 Lpf and (19 kg) 1.27 020 White 0.21 Bone 222 Linen 222 Linen 222 Linen 1.28 gpf/4.8 Lpf tank complete with (21 kg) 0.76 020 White 0.220 Linen 0.42 020 White 021 Bone 1.28 gpf/4.8 Lpf tank complete with 0.66 lbs 0.01 002 Polished Chrome 0.220 White 0.30 kg) 0.01 022 Polished Chrome 0.21 Bone 222 Linen 222 Linen 222 Linen 1.28 gpf/4.8			

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

American Standard

Two-Piece Toilets Vitreous China	DE	SCRIPTION							
	Colony – Round Front Toilet Less Seat • Combination bowl and tank, less seat • Low consumption (1.6 gpf/6.0 Lpf) • 12" (305 mm) rough-in • Siphon action bowl with direct fed jet and exe • 2" (51 mm) trapway • 9" x 8" (229 x 203 mm) water surface area • 2" (51 mm) flapper flush valve • Color-matched trip lever • Two color-matched bolt caps • Two-year warranty (see full warranty on page	cellent rim wa	-						
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price				
221DA.004	Colony – Round Front Toilet Less Seat 12" Rough-In Nominal Dimensions: • 27-13/16" x 19-3/16" x 29-3/8" (706 x 488 x 746 mm)			020 White 021 Bone 222 Linen	184 227 227				
	Separate Components:								
3251D.101	Round front bowl with two color-matched bolt caps. For use with 1.6 gpf/6.0 Lpf and 1.28 gpf/4.8 Lpf tanks	42 lbs (19 kg)	1.27	020 White 021 Bone 222 Linen	95 116 116				
4192A.004	1.6 gpf/6.0 Lpf tank complete with coupling components and tank trim	27 lbs (12 kg)	0.76	020 White 021 Bone 222 Linen	89 111 111				
735189-400	Tank cover		0.42	020 White 021 Bone 222 Linen	59 74 74				
⊳7381004-XXX0A	LH trip lever (specify finish)	0.66 lbs (0.30 kg)	0.01	002 Polished Chrome 020 White 021 Bone 222 Linen	21 21 26 26				
⊳738171-XXX0A	RH trip lever	0.66 lbs (0.30 kg)	0.01	002 Polished Chrome 020 White	21 21				
4192A.005	1.6 gpf/6.0 Lpf 12" (305 mm) tank with trip lever on right-hand side	27 lbs (12 kg)	0.76	020 White	100				
	Recommended Seats (sold separately):			1					
5259B.65MT	Round front slow-close seat and cover	3.0 lbs (1.28 kg)	0.24	020 White 021 Bone 222 Linen	46 51 51				
	\sim								

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

 \diamond Check your local codes to determine if 1.6 gpf/6.0 Lpf toilets are allowed in your area.

American Standard

Two-Piece Toilets Vitreous China	DESCRIPTION								
	 Colony - Round Front Toilet Less Seat - 10" Rough-In Combination bowl and tank, less seat High efficiency, ultra-low consumption (1.28 gpf/4.8 Lpf), utilizes 20% less water Meets EPA WaterSense® criteria 10" (254 mm) rough-in Siphon action bowl with direct fed jet and excellent rim wash 2" (51 mm) trapway 9" x 8" (229 x 203 mm) water surface area 2" (51 mm) flapper flush valve Color-matched trip lever Two color-matched bolt caps Two-year warranty (see full warranty on page 553) 								
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE				
221DB.104	Colony – Round Front Toilet Less Seat 10" Rough-In Nominal Dimensions: • 25-13/16" x 18-11/16" x 29-1/2" (656 x 474 x 750 mm)			020 White 021 Bone 222 Linen	250 310 310				
	Separate Components:			1					
3251D.101	Round front bowl with two color-matched bolt caps. For use with 1.6 gpf/6.0 Lpf and 1.28 gpf/4.8 Lpf tanks	42 lbs (19 kg)	1.27	020 White 021 Bone 222 Linen	95 116 116				
4192B.104	1.28 gpf/4.8 Lpf tank complete with coupling components and tank trim	27 lbs (12 kg)	0.54	020 White 021 Bone 222 Linen	155 194 194				
735190-400	Tank cover		0.42	020 White 021 Bone 222 Linen	62 79 79				
⊳7381004-XXX0A	LH trip lever (specify finish)	0.66 lbs (0.30 kg)	0.01	002 Polished Chrome 020 White 021 Bone 222 Linen	21 21 26 26				
⊳738171-XXX0A	RH trip lever	0.66 lbs (0.30 kg)	0.01	002 Polished Chrome 020 White	21 21				
4192B.105	1.28 gpf/4.8 Lpf 10" (254 mm) tank with trip lever on right-hand side	27 lbs (12 kg)	0.54	020 White	174				
	Recommended Seats (sold separately):								
5259B.65MT	Round front slow-close seat and cover	3.0 lbs (1.28 kg)	0.24	020 White 021 Bone 222 Linen	46 51 51				
	For other seat options see pages 284-290. For	additional ta	nks see	page 294.					

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

American Standard

Two-Piece Toilets /itreous China	DE	SCRIPTION			
*	Colony – Round Front Toilet Less Seat • Combination bowl and tank, less seat • Low consumption (1.6 gpf/6.0 Lpf) • 10" (254 mm) rough-in • Siphon action bowl with direct fed jet and exc • 2" (51 mm) trapway 9" x 8" (229 x 203 mm) water surface area • 2" (51 mm) flapper flush valve • Color-matched trip lever • Two color-matched bolt caps • Two-year warranty (see full warranty on page	cellent rim wa	-		
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price
221DB.004	Colony – Round Front Toilet Less Seat 10" Rough-In Nominal Dimensions: • 25-13/16" x 18-11/16" x 29-1/2" (656 x 474 x 750 mm)			020 White 021 Bone 222 Linen	250 310 310
	Separate Components:				
3251D.101	Round front bowl with two color-matched bolt caps. For use with 1.6 gpf/6.0 Lpf and 1.28 gpf/4.8 Lpf tanks	42 lbs (19 kg)	1.27	020 White 021 Bone 222 Linen	95 116 116
4192B.004	1.6 gpf/6.0 Lpf tank complete with coupling components and tank trim	27 lbs (12 kg)	0.54	020 White 021 Bone 222 Linen	155 194 194
735190-400	Tank cover		0.42	020 White 021 Bone 222 Linen	62 79 79
⊳7381004-XXX0A	LH trip lever (specify finish)	0.66 lbs (0.30 kg)	0.01	002 Polished Chrome 020 White 021 Bone 222 Linen	21 21 26 26
	Recommended Seats (sold separately):			11	
★5259B.65MT	Round front slow-close seat and cover	3.0 lbs (1.36 kg)	0.24	020 White	46
	For other seat options see pages 284-290. For				

Meets all ANSI/ASME Low Consumption, Water Conservation Requirements.

 \diamond Check your local codes to determine if 1.6 gpf/6.0 Lpf toilets are allowed in your area.

 \triangleright Parts Program (Non-Premier)

American Standard

Cadet[®]

Bidets

Bidets Vitreous China	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
5023.100	Cadet Bidet for Deck-Mounted Fittings Integral overflow Two color-matched bolt caps For through-the-floor outlet Design-matched to Cadet and Champion® toilets Nominal Dimensions: 25-3/4" x 15-3/8" x 14-7/8" (654 x 391 x 378 mm) For deck-mounted fitting only Flushing rim and vertical cleansing spray Suggested Bidet fitting (not included): Serin® – see page 450 	42 lbs (19 kg)	1.38	020 White 021 Bone 222 Linen	597 746 746
5023.111	Cadet Single Hole Bidet	42 lbs	1.83	020 White	248
	for Deck-Mounted Fittings • Integral overflow • Two color-matched bolt caps • For through-the-floor outlet • Design-matched to Cadet and Champion® toilets Nominal Dimensions: • 25-3/4" x 15-3/8" x 14-7/8" (654 x 391 x 378 mm) For deck-mounted fitting only • Flushing rim and vertical cleansing spray Suggested Bidet fitting (not included): • Serin® – see page 450	(19 kg)		021 Bone	310

All bidets are shipped with two floor screws and two color-matched bolt caps.

Bidets

American Standard

SpaLet® Toilet

Dual Flush (1.32 - 0.92 gpf/4.9 - 3.4 Lpf) Toilet

SpaLet Toilet	DESCRIPTION						
Advanced Clean® 100 SpaLet Toilet	 Two, adjustable, self-cleaning spray nozz Automatic open/slow-close lid and seat Warm air dryer (3 temperature levels) Adjustable, automatic flush setting (off, 2 Heated seat (5 temperature levels) Adjustable water control settings; pressu Air Shield deodorizer with replaceable filt Blue light deodorizer to clean the air insic Room refresh deodorizer to clean the air (does not operate when SpaLet is being u Soft night light guides you at night Nozzle Shutter to conceal the water sprate External manual flush button One-touch power save (8 hours) In-line easy to access water strainer Remote control ADA compliant WaterSense® dual flush 1.32 – 0.92 gpf /4 Power Stream Flush: double vortex flush Three-year warranty (see full warranty on 	, 6, 10, 15 secon re (6 levels), tem er le the bowl (oper in the bathroom used) ys 4.9 – 3.4 Lpf with siphon jet	d delay o perature (ptions) (5 levels), massage and os			
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST		
297AA204-291	Advanced Clean 100 SpaLet Toilet Nominal Dimensions: • 14-3/4" x 25-1/16" x 20-9/16" (375 mm x 650 mm x 523 mm)	75 lbs (34 kg)		291 Alabaster White	4,080		
	Separate Components						
3970A101-291	Advanced Clean 100 SpaLet bowl	48.5 lbs (22 kg)	1.90	291 Alabaster White	955		
8017A60GRC-291	Advanced Clean 100 SpaLet seat	26.5 lbs	3.02	291 Alabaster White			

SpaLet

American Standard

SpaLet® Seats

SpaLet Seats	DESCRIPTION							
Aquawash® 1.0 Manual SpaLet Seat	 Non-electric bidet feature with adjustable spra Dual self-cleansing nozzles for independent fra Removable nozzle tips for additional cleaning Slow-close seat and lid for user convenience One-push removable seat for easier cleaning of 2-7/16" (62 mm) seat height Seamless telescoping lid design to conceal the Includes mounting hardware, water supply hose Fits most conventional elongated toilets 	ont and back cle of the seat and b e seat ring	0					
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price			
5900A05GT.XXX	Aquawash 1.0 Manual SpaLet SeatElongated seat and slow-close cover	4.4 lbs (2 kg)	0.35	020 White	128			
	Separate Component:			1				
⊳ 760242-200.0070A	Mounting kit with bracket	0.22 lbs (0.10 kg)		N/A	27			
quawash 2.0 Ianual SpaLet Seat	 Instant heating for continuous warm water with Adjustable heated seat with 2 temperature set Soft night light guides you at night Removable nozzle tips for additional cleaning Slow-close seat and lid for user convenience One-push removable seat for easier cleaning of Ultra low 3-3/4" (95 mm) seat height Seamless telescoping lid design to conceal the 	 Removable nozzle tips for additional cleaning Slow-close seat and lid for user convenience One-push removable seat for easier cleaning of the seat and bowl Ultra low 3-3/4" (95 mm) seat height Seamless telescoping lid design to conceal the seat ring Includes mounting hardware, water supply hose and seat 						
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price			
8019A60GPC.XXX	Aquawash 2.0 Manual SpaLet SeatElongated seat and slow-close cover	7.2 lbs (3.3 kg)	0.66	020 White	458			
	Separate Component:	1		1				
⊳ 760242-200.0070A	Mounting kit with bracket	0.22 lbs (0.10 kg)		N/A	27			

SpaLet Seats

SpaLet® Seats

Advanced Clean

SpaLet Seats	DESCRIPTION							
Advanced Clean® 1.0 SpaLet Seat	 Dual self-cleansing nozzles for independent front and back cleansing Adjustable heated seat: three pre-set and two additional Adjustable water controls: pressure and temperature have five levels – three pre-set and two customer settings plus a massage and oscillation spray feature Deodorizer with easy to access and clean charcoal filter cartridge (approximately 10 years) Slow-close seat and lid for user convenience One-push removable seat for easier cleaning of the seat and bowl One-touch power save (8 hours) Side panel operation 6-7/8" (173 mm) seat height Includes mounting hardware, water supply hose and seat Fits most conventional elongated toilets 							
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE			
8013A80GPC-XXX	Advanced Clean 1.0 SpaLet SeatElongated seat and slow-close cover	9 lbs (4 kg)	1.05	020 White	509			
	Separate Component:							
⊳ 760241-200.0070A	Mounting kit with bracket	0.47 lbs (0.21 kg)	0.03	N/A	27			
Advanced Clean® 2.0 SpaLet Seat	 Dual self-cleansing nozzles for independent front a Adjustable heated seat of five temperature levels Adjustable water controls: Water pressure of six le Adjustable water temperature of five temperature l Deodorizer with easy to access and clean charcoa Slow-close seat and lid for user convenience One-push removable seat for easier cleaning of the One-touch power save (8 hours) Remote operation 6-7/8" (173 mm) seat height Includes mounting hardware, water supply hose and Fits most conventional elongated toilets 	evels plus a m levels Il filter cartrid e seat and bo	nassage ar ge (approx					
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE			
8012A80GRC-XXX	Advanced Clean 2.0 SpaLet Seat Elongated seat and slow-close cover 	9.7 lbs (4.4 kg)	1.05	020 White	611			
	Separate Component:	I			1			
⊳ 760241-200.0070A	Mounting kit with bracket		0.03	N/A	27			

SpaLet Seats

American Standard

SpaLet® Seats

Advanced Clean

SpaLet Seats	DESCRIPTION					
Advanced Clean® 2.5 SpaLet Seat	 Dual self-cleansing nozzles for independent front and bac Adjustable heated seat of five temperature levels Instant heating for continuous warm water Warm air dryer (3 temperature levels) Adjustable water controls: Water pressure of six levels pl Adjustable water temperature of five temperature levels Deodorizer with easy to access and clean charcoal filter of Soft night light guides you at night Slow-close seat and lid for user convenience One-push removable seat for easier cleaning of the seat of One-touch power save (8 hours) Remote operation Slim 5-1/2" (140 mm) seat height Includes mounting hardware, water supply hose and seat Fits most conventional elongated toilets 	us a massag cartridge (ap and bowl	ge and os		feature	
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST PRICE	
8012A60GRC-XXX	Advanced Clean 2.5 SpaLet SeatElongated seat and slow-close cover	12.1 lbs (5.5 kg)	1.14	020 White	995	
	Separate Component:					
⊳ 760241-200.0070A	Mounting Kit with bracket		0.03	N/A	27	
Advanced Clean® 3.0 SpaLet Seat	 Dual self-cleansing nozzles for independent front and back cleansing Instant heating for continuous warm water Warm air dryer (3 temperature levels) Adjustable heated seat of five temperature levels Adjustable water control settings; pressure (6 levels), temperature (5 levels), massage, oscillation and mild cleansing Air Shield deodorizer with replaceable filter Slow-close seat and lid for user convenience Pre-mist to pre-wash the bowl One-push removable seat for easier cleaning of the seat of One-touch power save (8 hours) Fits most conventional elongated toilets Remote operation Ultra slim 4-3/32" (104 mm) seat height Includes mounting hardware, water supply hose and seat Fits most conventional elongated toilets 	Innov and bowl	20 ecticut Co & Gardens ation by D Awards	s í l	2019 ALLET	
	PRODUCT	NET WEIGHT	PTS	COLORS	LIST Price	
8018A60GRC-XXX	Advanced Clean 3.0 SpaLet Seat • Elongated seat and slow-close cover	11.7 lbs (5.3 kg)	0.88	020 White	1,683	
	Separate Component:	I		I		
⊳ 760287-401.0070A	Mounting Kit with bracket		0.12	N/A	120	

SpaLet Seats



Toilet Seats

Toilet Seats	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Telescoping Toilet Seats With Trivantage™	 Telescoping cover conceals seat when closed Top-mounting transitional styled seat with cover can be installed from top of toilet bowl Slow-close feature for user convenience Seat can be removed from bowl with the push of a button allowing for easy removal and reattachment of seat without tools for quick and easy cleaning Made from Polypropylene Plastic Fits all conventional elongated and round front toilets including Studio® Dual Flush toilets EverClean® Antimicrobial Surface Includes seat stabilizing hinge to prevent seat shift TriVantage = Easy Close, Easy Lift, Easy Clean 				
5025A.65G	 Telescoping – Easy Lift-Off Toilet Seat Elongated seat and cover complete with top-mounting hardware 	5 lbs (2.3 kg)	0.23	020 White 222 Linen	112 138
5025B.65G	 Telescoping – Easy Lift-Off Toilet Seat Round front seat and cover complete with top-mounting hardware 	5 lbs (2.3 kg)	0.18	020 White 222 Linen	102 128
	Separate Component:				_
⊳ 760234-100.XXX0A	Mounting kit, top and bottom mounting hardware and color-matched seat stabilizing hinge	0.33 lbs (0.15 kg)	0.001	020 White 222 Linen	17 17
Traditional Toilet Seats With Trivantage™	 Top-mounting traditional styled seat with cover can be installed from top of toilet bowl Slow-close feature for user convenience Seat can be removed from bowl with the push of a button allowing for easy removal and reattachment of seat without tools for quick and easy cleaning Made from Polypropylene Plastic Fits all conventional elongated and round front toilets including Studio Dual Flush toilets EverClean Antimicrobial Surface Includes seat stabilizing hinge to prevent seat shift TriVantage = Easy Close, Easy Lift, Easy Clean 				
5020A.65G	 Traditional – Easy Lift-Off Toilet Seat Elongated seat and cover complete with top-mounting hardware 	5 lbs (2.3 kg)	0.24	020 White 222 Linen	112 138
5020B.65G	 Traditional – Easy Lift-Off Toilet Seat Round front seat and cover complete with top-mounting hardware 	5 lbs (2.3 kg)	0.18	020 White 222 Linen	102 128
	Separate Component:	1		·	
⊳ 760234-100.XXX0A	Mounting kit, top and bottom mounting hardware and color-matched seat stabilizing hinge	0.33 lbs (0.15 kg)	0.001	020 White 222 Linen	17 17

▷ Parts Program (Non-Premier)

American Standard

Toilet Seats

Toilet Seats

Toilet Seats	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Transitional Toilet Seats With Trivantage™	 Top-mounting transitional styled seat with cover can be installed from top of toilet bowl EverClean® Antimicrobial Surface Slow-close feature for user convenience Seat can be removed from bowl with the push of a button allowing for easy removal and reattachment of seat without tools for quick and easy cleaning Made from Polypropylene Plastic Fits all conventional elongated and round front toilets including Studio® Dual Flush toilets Includes seat stabilizing hinge to prevent seat shift TriVantage = Easy Close, Easy Lift, Easy Clean 				
•			0.04	000 14/1-11-	110
	 D24A.65G Transitional – Easy Lift-Off Toilet Seat Elongated seat with cover complete with top-mounting hardware 	5 lbs (2.3 kg)	0.24	020 White 222 Linen	112 138
slow-Close 5024B.6	 D24B.65G Transitional – Easy Lift-Off Toilet Seat Round front seat and cover complete with top-mounting hardware 	5 lbs (2.3 kg)	0.18	020 White 222 Linen	102 128
	Separate Component:				
⊳ 760234-10 Ø	DO.XXX0A Mounting kit, top and bottom mounting hardware an color-matched seat stabilizing hinge	nd 0.33 lbs (0.15 kg)	0.001	020 White 222 Linen	17 17

 \triangleright Parts Program (Non-Premier)

Toilet Seats

Toilet Seats

Toilet Seats

Toilet Seats	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Champion [®] Slow-Close Toilet Seat and Cover	 Slow-close "No Slam" hinge for user's convenience No Tools Needed lift-off hinges for easy cleaning EverClean® Antimicrobial Surface Solid plastic seat with cover Fits most conventional elongated and round front toilets Attractive design coordinates with popular bathroom decor Includes bottom-mounting hardware 				
Slow Close	 Champion - Elongated - Slow-Close Toilet Seat and Cover With EverClean Elongated seat with cover complete with bottom-mounting hardware 	4 lbs (1.7 kg)	0.29	020 White 021 Bone 222 Linen	80 89 89
5320B.65CT	 Champion – Round Front – Slow-Close Toilet Seat and Cover With EverClean Round front seat with cover complete with bottom-mounting hardware 	4 lbs (1.7 kg)	0.23	020 White 021 Bone 222 Linen	67 79 79
	Separate Component:	1			
⊳ 760219-100.0070A	Mounting kit		0.001		4
Cadet [®] 3 – Slow-Close Toilet Seat and Cover	 Solid plastic seat with cover EverClean® Antimicrobial Surface Traditional styling Telescoping lid conceals seat when closed Plastic slow-close hinge Fits all conventional elongated and round front toilets Sanitary seat lift tab 				
Slow-Close 5350.110	Cadet 3 – Slow-Close – Elongated Seat and Cover • EverClean Antimicrobial Surface	6 lbs (2.7 kg)	0.20	020 White 021 Bone 222 Linen	69 79 79
5345.110 Sanitary Lift Tab	Cadet 3 – Slow-Close – Round Font Seat and Cover • EverClean Antimicrobial Surface	6 lbs (2.7 kg)	0.20	020 White 021 Bone 222 Linen	66 75 75
	Separate Component:	1	1	1	
⊳ 760087-0070A	Mounting kit	0.09 lbs (0.04 kg)	0.001	N/A	7

American Standard

Toilet Seats	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Contemporary VorMax® Toilet Seat With Trivantage™	 Ever-Tite[™] bumpers for CleanCurve[®] rim EverClean[®] Antimicrobial Surface Slow-close hinges to prevent slamming of the seat Two button push lift-off feature for easy removal and attachment without tools Bottom mount installation with pin hinge TriVantage = Easy Close, Easy Lift, Easy Clean 				
5055A.65C	Contemporary VorMax – Slow-Close Elongated Seat With Trivantage • Ever-Tite bumpers for CleanCurve rim	3.7 lbs (1.7 kg)	0.31	020 White 021 Bone 222 Linen	92 102 102
	Separate Component:				
⊳ 760218-101.XXX0A	Seat mounting kit includes bottom-mounting hinge pins and color-matched caps	0.22 lbs (0.09 kg)	0.001	020 White 021 Bone 222 Linen	11 6 6
Contemporary Toilet Seat With Trivantage™	 Flat bumpers for universal fit EverClean Antimicrobial Surface Slow-close hinges to prevent slamming of the seat Two button push lift-off feature for easy removal and attachment without tools Bottom mount installation with pin hinge TriVantage = Easy Close, Easy Lift, Easy Clean 				
5055A.65PT	Contemporary VorMax – Slow-Close Elongated Seat With Trivantage • Flat bumpers for universal fit	3.70 lbs (1.68 kg)	0.31	020 White 021 Bone 222 Linen	77 82 82
5055B.65PT	Contemporary VorMax – Slow-Close Round Front Seat With Trivantage • Flat bumpers for universal fit	3.40 lbs (1.54 kg)	0.25	020 White 021 Bone 222 Linen	71 77 77
	Separate Component:				
⊳ 760218-101.XXX0A	Seat mounting kit includes bottom-mounting hinge pins and color-matched caps	0.22 lbs (0.09 kg)	0.001	020 White 021 Bone 222 Linen	11 6 6
Laurel Toilet Seat	Molded wood seat and cover				
5311.012	 Laurel – Elongated Seat Complete with bolts, nuts and dual-faced adhesive washers 	7 lbs (3.2 kg)	0.21	020 White	42

 \triangleright Parts Program (Non-Premier)

American Standard

Toilet Seats	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Cardiff [™] Slow-Close Toilet Seat	 Solid plastic seat with cover EverClean[®] antimicrobial surface Slow-close hinges Quick connect nut to expedite installation Fits most conventional elongated and round front toilets Installation kit included 				
5257A65MT	Cardiff – Elongated – Slow-Close Seat With Cover • Slow-close hinge	3.31 lbs (1.5 kg)	0.24	020 White 021 Bone 222 Linen	51 56 56
5259B65MT	Cardiff – Round Front – Slow-Close Seat With Cover • Slow-close hinge	2.82 lbs (1.28 kg)	0.24	020 White 021 Bone 222 Linen	46 51 51
	Separate Component:				
⊳ 760219-100.0070A	Mounting Kit	0.09 lbs (0.04 kg)	0.001		4

▷ Parts Program (Non-Premier)



Toilet Seats Value Pack Program	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Easy Lift & Clean Toilet Seat	 Value pack of 5 seats Individually packaged and labeled for easy sell through Solid plastic seat with cover EverClean® Antimicrobial Surface Slow-close hinges include Easy Lift & Clean feature for cleaning with easy removal and reattachment without tools Quick connect nut to expedite installation Fits all conventional elongated and round front toilets Installation kit included 		AUT	IE PRICING IS DMATICALLY TED ON ORDER	
	Value Pack – 5 Seats:				
★5257A.65D5	Easy Lift & Clean – Elongated Seat With Cover • Lift & Clean hinge • Value pack of 5 seats	16.55 lbs (7.5 kg)	1.53	020 White 021 Bone 222 Linen	215 260 260
★5259B.65D5	 Easy Lift & Clean – Round Front Seat With Cover Lift & Clean hinge Value pack of 5 seats 	14.1 lbs (6.4 kg)	1.53	020 White 021 Bone 222 Linen	210 240 240
★5257A.65C5	 Easy Lift & Clean - Elongated Seat With 3Ease™ Slow-close Lift & Clean hinge Value pack of 5 seats 	16.55 lbs (7.5 kg)	1.53	020 White 021 Bone 222 Linen	290 340 340
★5259B.65C5	Easy Lift & Clean – Round Front Seat With 3Ease Slow-close Lift & Clean hinge Value pack of 5 seats 	14.1 lbs (6.4 kg)	1.09	020 White 021 Bone 222 Linen	255 295 295
	Single Seat ONLY:	1			
★5257A.65D	Easy Lift & Clean – Elongated Seat With Cover • Lift & Clean hinge • Single seat only	3.31 lbs (1.5 kg)	0.24	020 White 021 Bone 222 Linen	43 52 52
★5259B.65D	Easy Lift & Clean – Round Front Seat With Cover • Lift & Clean hinge • Single seat only	2.82 lbs (1.28 kg)	0.24	020 White 021 Bone 222 Linen	42 48 48
★5257A.65C	Easy Lift & Clean – Elongated Seat With 3Ease Slow-close Lift & Clean hinge Single seat only 	3.31 lbs (1.5 kg)	0.24	020 White 021 Bone 222 Linen	58 68 68
★5259B.65C	Easy Lift & Clean – Round Front Seat With 3Ease Slow-close Lift & Clean hinge Single seat only 	2.82 lbs (1.28 kg)	0.24	020 White 021 Bone 222 Linen	51 59 59

Toilet Seats

American Standard

Toilet Seats Value Pack Program	DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Prici
∟uxury Slow-Close Foilet Seat With Trivantage™	 Value pack of 5 seats Individually packaged and labeled for easy sell through Bottom mount transitional style solid plastic seat with cover EverClean[®] Antimicrobial Surface 				
	 Slow-close hinges for user convenience Easy Lift Off feature allows the seat to be removed with a push of a button for cleaning – with easy removal and reattachment without tools Fits all conventional elongated and round front toilets Installation kit included 	VALUE PRICING AUTOMATICALL REFLECTED ON OF			t
	Value Pack – 5 Seats:				
★5256A.65C5		17.3 lbs (7.85 kg)	1.53	020 White 021 Bone 222 Linen	400 425 425
★5256B.65C5	Luxury Slow-Close – Round Front Seat With Trivantage • Slow-close Easy Lift Off hinge • Value pack of 5 seats	15.65 lbs (7.1 kg)	1.02	020 White 021 Bone 222 Linen	360 385 385
	Single Seat ONLY:				
★5256A.65C	Luxury Slow-Close – Elongated Seat With Trivantage • Slow-close Easy Lift Off hinge • Single seat only	3.46 lbs (1.57 kg)	0.24	020 White 021 Bone 222 Linen	80 85 85
★5256B.650	Luxury Slow-Close – Round Front Seat With Trivantage • Slow-close Easy Lift Off hinge • Single seat only	3.13 lbs (1.42 kg)	0.22	020 White 021 Bone 222 Linen	72 77 77
ELESCOPING OILET SEAT	Value pack of 5 seats Individually packaged and labeled for easy sell through				
	 Solid plastic seat with telescoping cover EverClean Antimicrobial Surface Slow-close hinges for user convenience Quick connect nut to expedite installation Fits all conventional elongated and round front toilets 		AUTO	E PRICING IS DMATICALLY TED ON ORDER	
	Value Pack – 5 Seats:				1
★5359A.051T5	Telescoping Slow-Close – Elongated Seat With Cover • Slow-close hinge • Value pack of 5 seats	20.4 lbs (9.25 kg)	1.02	020 White 021 Bone 222 Linen	380 405 405
★5359B.051T5	Telescoping Slow-Close Round Front Seat With Cover • Slow-close hinge • Value pack of 5 seats	14.65 lbs (6.65 kg)	1.02	020 White 021 Bone 222 Linen	360 385 385
	Single Seat ONLY:		1		
★5359A.051T	Telescoping Slow-Close – Elongated Seat With Cover • Slow-close hinge • Single seat only	4.08 lbs (1.85 kg)	0.24	020 White 021 Bone 222 Linen	80 85 85
★5359B.051T	Telescoping Slow-Close – Round Front Seat With Cover • Slow-close hinge • Single seat only	2.93 lbs (1.33 kg)	0.24	020 White 021 Bone 222 Linen	72 77 77



Toilet Trip Levers

Trip Levers		DESCRIPTION	COLORS/FINISHES	LIST PRICI
Rectangular Top-of-Tank Push Button Actuator	⊳ 7381203-200.XXX0A	• Dual flush push button, top mount	002 Polished Chrome 243 Matte Black 295 Brushed Nickel	13 115 95
Toilet Trip Lever	⊳ 738903.XXX0A	● Cadet [®] left-hand trip lever	002 Polished Chrome 020 White 222 Linen 243 Matte Black 295 Brushed Nickel	21 34 40 87 30
Toilet Trip Lever	⊳ 7381064.XXX0A	• Boulevard [®] left-hand trip lever	002 Polished Chrome 224 ORB 243 Matte Black 295 Brushed Nickel	41 99 72 58
Champion [®] Pro Metal Trip Levers	⊳7381232-200.XXX0A	 Trip lever for Champion PRO 4225A tank Specify color or finish Polished Chrome supplied 	002 Polished Chrome 013 Polished Nickel 020 White 021 Bone 222 Linen 224 ORB 278 Legacy Bronze 295 Brushed Nickel	35 39 44 55 55 90 67 47
Cadet [®] Pro Metal Trip Levers	⊳7381231-200.XXX0A	 Trip lever for Cadet PRO tanks 4188A and 4188B Specify color or finish Polished Chrome supplied 	002 Polished Chrome 013 Polished Nickel 020 White 099 Polished Brass 224 ORB 278 Legacy Bronze 295 Brushed Nickel	32 39 38 38 58 94 46
Colony [®] Plastic Trip Levers	⊳7381004-XXX0A	 Trip lever for Colony tanks 4192A and 4192B Specify color 	002 Polished Chrome 020 White 021 Bone 222 Linen	21 21 26 26

ORB (Oil Rubbed Bronze)

▷ Parts Program (Non-Premier)

American Standard

Toilet Tanks

Toilet Tanks		DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Optional Champion® PRO Tanks For: 211AA, 211BA And 211CA 12" Rough-In Toilets 1.28 gpf/4.8 Lpf Water Volume	4225A.154	Tank complete with Aquaguard liner	32 lbs (14.5 kg)	0.76	020 White 021 Bone 222 Linen	282 346 346
	4225A.164	Tank complete with tank cover locking device	32 lbs (14.5 kg)	0.76	020 White	251
-4	4225A.174	Tank complete with Aquaguard liner and tank cover locking device	32 lbs (14.5 kg)	0.76	020 White	307
	4225A.105	Tank complete with coupling components, tank trim and trip lever located on right-hand side SR	32 lbs (14.5 kg)	0.76	020 White	225
Optional Champion PRO Tanks For: 211AA, 211BA and 211CA 12" rough-in toilets 1.6 gpf/6.0 Lpf water volume	4225A.064	Tank complete with tank cover locking device	34 lbs (15.4 kg)	0.76	020 White	251
-	4225A.005	 Tank complete with coupling components, tank trim and trip lever located on right-hand side 	34 lbs (15.4 kg)	0.76	020 White	225
		SR				

 \diamond Check your local codes to determine if 1.6 gpf/6.0 Lpf toilets are allowed in your area.



Toilet Tanks

Toilet Tanks		DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST PRICE
Optional Cadet [®] PRO Tanks For: 215AA, 215BA, 215CA, 215DA, 215FC 12" rough-in toilets	4188A.154	Tank complete with Aquaguard liner	28 lbs (12.7 kg)	0.76	020 White 021 Bone 222 Linen	173 215 215
1.28 gpf/4.8 Lpf water volume	4188A.164	Tank complete with tank cover locking device	28 lbs (12.7 kg)	0.76	020 White	150
-0	4188A.174	Tank complete with Aquaguard liner and tank cover locking device	28 lbs (12.7 kg)	0.76	020 White	209
	4188A.105	Tank complete with trip lever on right-hand side	28 lbs (12.7 kg)	0.76	020 White	117
6	4188A.155	Tank complete with Aquaguard liner and trip lever on right-hand side	28 lbs (12.7 kg)	0.76	020 White	205
	4188A.165	Tank complete with Tank cover locking device and trip lever on right-hand side	28 lbs (12.7 kg)	0.76	020 White	155
Optional Cadet PRO Tanks For: 215AA, 215BA, 215CA, 215DA, 215FC 12" rough-in toilets	4188A.054	Tank complete with Aquaguard liner	28 lbs (12.7 kg)	0.76	020 White 021 Bone 222 Linen	173 215 215
1.6 gpf/6.0 Lpf water volume	4188A.064	Tank complete with tank cover locking device	28 lbs (12.7 kg)	0.76	020 White	150
-0	4188A.074	Tank complete with Aquaguard liner and tank cover locking device	28 lbs (12.7 kg)	0.76	020 White	209
	4188A.005	Tank complete with trip lever on right-hand side	28 lbs (12.7 kg)	0.76	020 White	117
~	4188A.065	• Tank complete with Tank cover locking device and trip lever on right-hand side	28 lbs (12.7 kg)	0.76	020 White	155
Optional Cadet PRO Tanks For: 215AB, 215BB, 215FA, 215CB, 215DB 10" rough-in toilets 1.28 gpf/4.8 Lpf water volume	4188B.105	Tank complete with trip lever on right-hand side	28 lbs (12.7 kg)	0.76	020 White	199
Optional Cadet PRO Tanks For: 215AB, 215BB, 215FA, 215CB, 215DB 10" rough-in toilets 1.6 gpf/6.0 Lpf water volume	4188B.005	Tank complete with trip lever on right-hand side	27 lbs (12 kg)	0.76	020 White	199

 \diamond Check your local codes to determine if 1.6 gpf/6.0 Lpf toilets are allowed in your area.

Toilet Tanks

Toilet Tanks

Toilet Tanks		DESCRIPTION	NET WEIGHT	PTS	COLORS	LIST Price
Optional Colony® Tanks For: 221AA, 221CA, 221DA 12" rough-in toilets 1.28 gpf/4.8 Lpf water volume	4192A.154	Tank complete with Aquaguard liner	28 lbs (12.7 kg)	0.76	020 White 021 Bone 222 Linen	134 166 166
	4192A.164	Tank complete with tank cover locking device	28 lbs (12.7 kg)	0.76	020 White	100
	4192A.105	Tank complete with trip lever on right-hand side	28 lbs (12.7 kg)	0.76	020 White	100
The FINAL STREET		Í SR				
Optional Colony Tanks For: 221AA, 221CA, 221DA 12" rough-in toilets	4192A.064	Tank complete with tank cover locking device	28 lbs (12.7 kg)	0.76	020 White	100
1.6 gpf/6.0 Lpf water volume	4192A.005	Tank complete with trip lever on right-hand side	28 lbs (12.7 kg)	0.76	020 White	100
\$		ŚR				
Optional Colony® Tank For: 221AB, 221CB, 221DB 10" rough-in toilets 1.28 gpf/4.8 Lpf water volume	4192B.105	• Tank complete with trip lever on right-hand side	28 lbs (12.7 kg)	0.54	020 White	174
		SR				

 \diamond Check your local codes to determine if 1.6 gpf/6.0 Lpf toilets are allowed in your area.

American Standard

Notes

American Standard

Notes



Faucet Style Meets Substance

American Standard faucets are engineered to look beautiful and function flawlessly. Our exquisite designs offer innovative conveniences like easy-to-upgrade shower styles, peace-of-mind safety features and simpler-than-ever installation and cleaning.

Superior Engineering Inside and Out

Our ceramic disc valves are maintenance-free, and provide a lifetime of smooth handle control, even in extreme temperature or hard water conditions.



Faucet Lifetime Finishes

On the faucet exterior, American Standard offers a myriad of fine finishes all guaranteed to last a lifetime.* Physical Vapor Deposition (PVD) utilizes aerospace technology which actually makes the finish an integral part of the base faucet metal rather than just a coating. The result is a tarnish-, scratch- and corrosion-resistant faucet finish.



Matte Black and Legacy Bronze

The rich patina of these popular finishes make a statement in any setting. Meticulously applied for long wear, the smooth, saturated depth of Matte Black and the subtle luster of Legacy Bronze add focal interest and the perfect finishing touch.



*Extended to the original consumer purchaser. See faucet pages for finishes available for each faucet model. Color samples may vary slightly from the actual colors. Not all finishes are available on all products.

Imerican Standard

Featured NEW Products

NEW

NEW Studio® S Kitchen Faucet Collection



NEW Town Square® S Concealed Trapway One-Piece Toilet



NEW Town Square S Concealed Trapway Two-Piece Toilet



NEW Spectra Versa[™] Retrofit Shower Systems



NEW Town Square S Exposed Trapway Two-Piece Toilet





Residential Faucets

cons	3
Faucets	300-503
Faucet Style Meets Substance/Lifetime Finishes	297
Featured NEW Products	298
Kitchen, Bar and Laundry Faucets	300-327
Beale® MeasureFill® Technology	300
Selectronic [®] Hands-Free Technology	300
SelectFlo [®] Multi-Function Spray Technology	301
Kitchen and Bar Faucets at a Glance	303
Kitchen Accessories	327
Bathroom Faucets	328-503
WaterSense® Certified Faucets and Showers	328
Bathroom Faucets at a Glance	330
Flash [®] Roman Tub Filler Overview	331
Flash Shower Rough-In Valves	332
Bathroom Faucets – Style and Selection	334
Freestanding Tub Fillers	337
Bathroom Faucets, Trim Kits and Accessories	338
Bathroom Accessories	504-515
Bathroom Accessories at a Glance	505
Bathroom Accessories	506
Showering Options	516-545
Spectra Versa [™] Shower System	517
Shower System Step-by-Step Guide	518
Custom Shower System Worksheet	519
Shower System Trim Options at a Glance	520
Spectra® Shower Collection	522
Spectra Versa™ Shower Systems	523
2-in-1 Hand Showers/Fixed Showerheads/Rain Showerheads	524
Body Side Sprays	531
Shower Arms	532
Hand Showers	533
Slide Bar Kits, Shower System Trim Kit, Hand Shower Kits and Slide Bars	536
Shower System Accessories	541
Tub Spouts	542
Drains and P-Traps	545
Parts	546-549
Lavatory Faucets	546
Editatory i adooto	547
Flash Rough-In Valves	
	548
Flash Rough-In Valves	
Flash Rough-In Valves Cartridges and Rough-In Kits	548 550 552

American Standard

Beale[®] – MeasureFill[™] Technology

The Beale MeasureFill Touch kitchen faucet delivers an adjustable set volume of water, on demand, due to its unique MeasureFill technology. Simply set the measuring dial to the desired volume of water (ounces or cups) and activate the water flow via a simple touch on the dial window.

Ease of use

Makes cooking and baking easier and more convenient.

Less clutter

Helps to reduce clutter in the kitchen by eliminating the need for additional tools.

Touch or manual faucet activation

Activation of regular water flow through a simple touch on the faucet dial or manually via the faucet lever.



MeasureFill Detail



Beale MeasureFill Pull-Down Kitchen Faucet



Selectronic® – Hands-Free Technology

Our hands-free, Selectronic technology is now featured on two kitchen faucet collections: Avery[®] and Beale. Both collections feature a touchless model with the unique option of switching to manual operation by simply sliding a movable door to cover the sensor.



Avery Pull-Down Kitchen Touchless Selectronic Faucet

Hygienic

Helps reduce the risk of cross-contamination while handle and spout remain untouched.

Convenient Easily access water when hands are full or dirty.

Long lasting Equipped with 4 AA long-life batteries. AC adaptor available separately.



A movable door changes the faucet from touchless to manual operation in one quick movement. This allows the user to choose when they want to use the touchless option and when they don't.

American Standard

SelectFlo[®] Multi-Function Spray Technology

With geometric styling and impressive functionality, Edgewater® pull-down kitchen faucets feature an intuitive multi-function sprayer that allows the user to efficiently manage common kitchen tasks. The five-function SelectFlo® spray head includes a stream, spray, jet, mist and pause function. Optional scrub brushes are available to attach directly to the spray head with a simple twist for added cleaning convenience.

Increased functionality

- Four spray functions and pause
- Toggle down into spray mode
- Rotate dial to select spray
- Water will always turn on in STREAM mode

Luxury look and feel

Optional brush attachment

- Connects directly to spray head
- Assists with tough cleaning tasks



Edgewater® SelectFlo Pull-Down Kitchen Faucet







Edgewater Semi-Professional Kitchen Faucet

Kitchen and Bar Faucets

American Standard

Kitchen and Bar Faucets

Traditional, contemporary or transitional, there's an American Standard faucet to complement every kitchen. Combining superior functionality and design, each is equipped with ceramic disc valves for drip-free performance and is available in beautiful scratch- and tarnish-resistant finishes.



See pages 4-63 for available kitchen sinks.

American Standard

Kitchen and Bar Faucets at a Glance...



American Standard

Avery

Kitchen and Bar Faucets

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRIC
	Avery Pull-Down Kitchen Selectronic [®] Faucet	CEO	4901380.002 4901380.075	Polished Chrome Stainless Steel	633 772
	 Washerless (35 mm) ceramic disc valve cartridge 1.5 gpm/5.7 L/min maximum flow Metal body, handle and mounting hardware Brass swivel spout Features Re-Trax[®] spray head retraction system Includes Dock-Tite[®] magnetic docking system 	Â			
	 Selectronic hands-free operation turns water flow on and off with a wave of the hand Place faucet into manual mode by closing the sliding door 2-function spray with pause button Comes with 4 AA long-life batteries. AC adapter available separately 				
	 Spout height: 18" (457 mm) Spout clearance: 10-9/16" (269 mm) 			МАР	SR Ø
	Avery Pull-Down Kitchen Faucet – Manual	CEO	4901300.002 4901300.075	Polished Chrome Stainless Steel	441 524
	 Washerless (35 mm) ceramic disc valve cartridge 1.5 gpm/5.7 L/min maximum flow Metal body, handle and mounting hardware Brass swivel spout Features Re-Trax spray head retraction system Includes Dock-Tite magnetic docking system Standard manual operation 2-function spray with pause button Spout height: 18" (457 mm) Spout clearance: 10-9/16" (269 mm) 	(Å)			
. per				MAP	SRI Ø
	Avery Pull-Down Bar Faucet – Manual	CEO	4901410.002 4901410.075	Polished Chrome Stainless Steel	385 441
	 Washerless (35 mm) ceramic disc valve cartridge 1.5 gpm/5.7 L/min maximum flow Metal body, handle and mounting hardware Brass swivel spout Features Re-Trax spray head retraction system Includes Dock-Tite magnetic docking system Single function pull-down spray head Smaller scale to fit bar/prep sink Spout height: 15" (381 mm) Spout clearance: 10-5/16" (262 mm) 	Â			
*				МАР	SR Ø
200	Deck Plate Metal construction Available for use with all Avery kitchen faucets 		1660151.002 1660151.075	Polished Chrome Stainless Steel	34 41
	Includes putty plate			MAP	SR Ø
	 Pac Adapter Optional power source for use with Selectronic[®] faucets Power supply with IP65 connector Plug-in directly to wall socket from faucet 		M950338-0070A		62

American Standard

Beale®

Kitchen and Bar Faucets

DESCRIPTION		SKU #	COLOR/FINISH	LIST PR
 Beale MeasureFill[™] Touch Pull-Down Kitchen Faucet Washerless (35 mm) ceramic disc valve cartridge 1.5 gpm/5.7 L/min maximum flow Metal body, handle and mounting hardware Brass swivel spout Features Re-Trax[®] spray head retraction system 2-function spray with pause button Set MeasureFill dial to desired volume of water and touch to dispense Set MeasureFill dial to Start position and touch on and off Use faucet manually via faucet lever Comes with 4 AA long-life batteries. AC adaptor available separately Spout height: 17-5/8" (244 mm) Spout clearance: 9-5/8" (244 mm) 	CEO A	iF Design Award German Design Award Beautiful Kito 30 Most Innovativ 2018 A	reddot award 2018 winer dd ard 25	661 826
		IDEA Award	Finalist	_
Beale MeasureFill Deck Plate • Metal construction • For use with Beale MeasureFill kitchen faucet 4931360 • Includes putty plate		IDEA Award 4931888.002 4931888.075	Polished Chrome Stainless Steel	33 40
 Deck Plate Metal construction For use with Beale MeasureFill kitchen faucet 4931360 	CEO (A)	4931888.002 4931888.075 4931380.002 4931380.075 2018 German Design Awar 2016 A	Polished Chrome Stainless Steel Polished Chrome Stainless Steel AWARD	33 40 (SR) 633 772

American Standard

Beale®

Kitchen and Bar Faucets

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
	Beale Pull-Down Kitchen Faucet – Manual	CEO	4931300.002 4931300.075	Polished Chrome Stainless Steel	441 524
	 Washerless (35 mm) ceramic disc valve cartridge 1.5 gpm/5.7 L/min maximum flow Metal body, handle and mounting hardware Brass swivel spout Features Re-Trax[®] spray head retraction system Includes Dock-Tite[®] magnetic docking system Standard manual operation 2-function spray Dock-Tite spray head retraction system 	Æ			
	 Spout height: 17-9/16" (446 mm) Spout clearance: 10-1/2" (267 mm) 				
				MAF	SR 🖉
	Beale Pull-Down Bar Faucet	CEO	4931410.002 4931410.075	Polished Chrome Stainless Steel	385 441
	 Washerless (35 mm) ceramic disc valve cartridge 1.5 gpm/5.7 L/min maximum flow Metal body, handle and mounting hardware Brass swivel spout Features Re-Trax spray head retraction system Includes Dock-Tite magnetic docking system Single function pull-down spray head Smaller scale to fit bar/prep sink Dock-Tite spray head retraction system Spout height: 16-1/8" (410 mm) Spout clearance: 11-7/16" (291 mm) 	(Å)			
d 13				MAF	SR 🖉
0	Beale Kitchen and Bar Faucet Deck Plate • Metal construction • Available for use with Beale models 4931.380, 4931.300 and 4931.410 • Includes putty plate		9431888.002 9431888.075	Polished Chrome Stainless Steel	33 40
	Pac Adapter ● Optional power source for use with Selectronic [®] faucets		M950338-0070A		62
	Power supply with IP65 connectorPlug-in directly to wall socket from faucet				

Beale

American Standard

Studio[®] S

Kitchen and Bar Faucets

DESCRIPTION		SKU #	COLOR/FINISH	LIST PRI
 Studio S Semi-Professional Kitchen Faucet Flexible stainless steel coil spring for full reach and wipe-clean care Dual-function spray head offers stream and forceful spray for rinsing Easy-clean, one-piece lever handle eliminates tiny crevices where build-up hides Dock-Tite[®] magnetic docking system secures the spray head in place Swivel spout rotates 360° for optimal reach and range of motion in and around the sink Rubber spray nozzles wipe clean easily with your fingertip Drip-free performance with high quality ceramic disc valve Durable brass and metal construction Pre-installed braided nylon supply lines Limited lifetime warranty 		4803350.002 4803350.075 4803350.243	Polished Chrome Stainless Steel Matte Black	513 615 650
			МАР	SR Ø
Studio S Pull-Out Kitchen Faucet	NEW	4803100.002 4803100.075	Polished Chrome Stainless Steel	320 395
 Dual-function spray head offers stream and forceful sprays for optimal rinsing Profile is designed to accommodate many kitchen configurations Wipe-clean, one-piece lever handle eliminates tiny crevices where build-up hides Dock-Tite magnetic docking system secures the spray head in place Swivel spout for added functionality and convenience rotates 120° Rubber spray nozzles wipe clean easily with your fingertip Dirpi-free performance with high quality ceramic disc valve Durable brass and metal construction Pre-installed braided nylon supply lines Limited lifetime warranty 	(Å)	4803100.243	Matte Black	410
Studio S		4803300.002	Polished Chrome	385
 Pull-Down Dual Spray Kitchen Faucet High 18" (457 mm) design makes it easy to fill large pots and lends a professional look Wipe-clean, one-piece lever handle eliminates tiny crevices where build-up hides Dual-function spray head with pause easily toggles from a powerful spray to a smooth stream with one hand Re-Trax[®] feature ensures smooth retraction of spray head after use Dock-Tite magnetic docking system secures the spray head in place Swivel spout rotates 360° for optimal reach and 		4803300.075 4803300.243	Stainless Steel Matte Black	485 500
 range of motion in and around the sink Rubber spray nozzles wipe clean easily with your fingertip Drip-free performance with high quality ceramic disc valve Durable brass and metal construction Pre-installed braided nylon supply lines Limited lifetime warranty 				

See pages 4-63 for available kitchen sinks.

American Standard

Kitchen and Bar Faucets

DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
 Studio S Bar Faucet With Pull-Down Operation Contemporary profile is the perfect height for prep sinks and smaller kitchens Wipe-clean, one-piece lever handle eliminates tiny crevices where build-up hides Re-Trax[®] feature ensures smooth retraction of spray head after use Dock-Tite[®] magnetic docking system secures the spray head in place Swivel spout rotates 360° for optimal reach and range of motion in and around the sink Rubber spray nozzles wipe clean easily with your fingertip Drip-free performance with high quality ceramic disc valve Durable brass and metal construction Pre-installed braided nylon supply lines Limited lifetime warranty 		4803410.002 4803410.075 4803410.243	Polished Chrome Stainless Steel Matte Black	350 450 480
 Studio S Contemporary Wall-Mount Pot Filler Extends 22" (559 mm) to easily reach pots and pans on front or back burners Drip-free performance with high quality ceramic disc valve Designed for cold water attachment Durable brass and metal construction Pre-installed braided nylon supply lines 4.0 gallons per minute (15.1 L/min) flow rate at 60 psi Limited lifetime warranty 	NEW	4803900.002 4803900.075 4803900.243	Polished Chrome Stainless Steel Matte Black	589 725 815 SR 2
 Studio S Soap Dispenser Top-fill design Dispenses liquid soap or lotion Solid brass spout and escutcheon Accommodates up to 2-3/8" (60 mm) thick countertop 		4503120.002 4503120.075 4503120.243	Polished Chrome Stainless Steel Matte Black	99 121 123
 Studio S 8" Deck Plate Metal construction Available for use with all Studio S faucets Includes putty plate 		1660152.002 1660152.075 1660152.243	Polished Chrome Stainless Steel Matte Black	34 41 41 SR Ø

See pages 4-63 for available kitchen sinks.

Studio S



Delancey®

Kitchen and Bar Faucets

 DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
 Delancey Pull-Down Kitchen Faucet Washerless ceramic disc valve cartridge 1.5 gpm/5.7 L/min maximum flow Brass body and swivel spout Metal lever handle 28-3/4" (730 mm) long braided flexible supply hoses with 3/8" (10 mm) compression connectors Spout height: 16-11/16" (424 mm) Spout clearance: 9-5/16" (237 mm) Features Re-Trax[®] spray head retraction system Includes Dock-Tite[®] magnetic docking system 	CEO (Å)	4279300.002 4279300.013 4279300.075 4279300.278	Polished Chrome Polished Nickel Stainless Steel Legacy Bronze	468 562 562 606
 Delancey Pull-Down Bar Faucet Washerless ceramic disc valve cartridge 1.5 gpm/5.7 L/min maximum flow Brass body and swivel spout Metal lever handle 28-3/4" (730 mm) long braided flexible supply hoses with 3/8" (10 mm) compression connectors Pull-down spray Spout height: 15-1/8" (383 mm) Spout clearance: 10-3/8" (263 mm) Features Re-Trax spray head retraction system Includes Dock-Tite magnetic docking system 	CEO (A)	4279410.002 4279410.013 4279410.075 4279410.278	Polished Chrome Polished Nickel Stainless Steel Legacy Bronze	385 463 463 496
Delancey Two Handle Kitchen Faucet With Side Spray • Washerless ceramic disc valve cartridge • 1.5 gpm/5.7 L/min maximum flow • Brass body and swivel spout • Metal lever handle • 28-3/4" (730 mm) long braided flexible supply hoses with 3/8" (10 mm) compression connectors • Color-matched side spray • Spout height: 13-15/16" (353 mm) • Spout clearance: 8-7/16" (214 mm)	CEO (A)	4279701.002 4279701.013 4279701.075 4279701.278	Polished Chrome Polished Nickel Stainless Steel Legacy Bronze	358 429 429 468
Delancey Two Handle Bar Faucet • Washerless ceramic disc valve cartridge • 1.5 gpm/5.7 L/min maximum flow • Brass body and swivel spout • Metal lever handle • 28-3/4" (730 mm) long braided flexible supply hoses with 3/8" (10 mm) compression connectors • Spout height: 12-5/8" (321 mm) • Spout clearance: 6-1/16" (153 mm)	CEO (A)	4279400.002 4279400.013 4279400.075 4279400.278	Polished Chrome Polished Nickel Stainless Steel Legacy Bronze	276 331 331 358
Delancey Deck Plate • Metal construction • Available for use with all Delancey faucets • Includes putty plate		1660152.002 1660152.013 1660152.075 1660152.278	Polished Chrome Polished Nickel Stainless Steel Legacy Bronze	34 41 41 44 \$\$\$ Ø

American Standard

Pekoe®

Kitchen and Bar Faucets

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
	 Pekoe Semi-Professional Kitchen Faucet Durable brass construction Washerless ceramic disc valve cartridge Pull-down spray with adjustable spray pattern Metal lever handle 28-3/4" (730 mm) long braided flexible supply hoses with 3/8" (10 mm) compression connectors Brass body and swivel spout with swing arm Metal hose with stainless steel protector coil Spout height: 21-1/2" (547 mm) Spout clearance: 5-3/4" (146 mm) 2.2 gpm/8.3 L/min maximum flow 	Â	4332350.002 4332350.075	Polished Chrome Stainless Steel	716 860 SR 2
	Pekoe Semi-Professional Kitchen Faucet • Same as 4332350 • 1.5 gpm/5.7 L/min maximum flow	CEO	* 4332350F15.002 * 4332350F15.075	Polished Chrome Stainless Steel	716 860 SR Ø
	 Pekoe Pull-Down Kitchen Faucet Durable brass construction Washerless ceramic disc valve cartridge Pull-down spray with adjustable spray pattern Metal lever handle 28-3/4" (730 mm) long braided flexible supply hoses with 3/8" (10 mm) compression connectors Brass body and swivel spout Spout height: 15-1/2" (395 mm) Spout clearance: 8-1/4" (208 mm) 2.2 gpm/8.3 L/min maximum flow 	(Å)	4332300.002 4332300.075	Polished Chrome Stainless Steel	656 849
4 ₩	Pekoe Pull-Down Kitchen Faucet • Same as 4332300 • 1.5 gpm/5.7 L/min maximum flow	CEO	* 4332300F15.002 * 4332300F15.075	Polished Chrome Stainless Steel	656 849 SR Ø
	 Pekoe Pull-Down Kitchen Faucet Durable brass construction Washerless ceramic disc valve cartridge Brass body and swivel spout Metal lever handle 28-3/4" (730 mm) long braided flexible supply hoses with 3/8" (10 mm) compression connectors Pull-down spray with adjustable spray pattern Spout height: 14-3/4" (373 mm) Spout clearance: 9-7/8" (250 mm) 2.2 gpm/8.3 L/min maximum flow 	(Å)	* 4332310.002 * 4332310.075	Polished Chrome Stainless Steel	617 798
	Pekoe Pull-Down Kitchen Faucet • Same as 4332310 • 1.5 gpm/5.7 L/min maximum flow	CEO	* 4332310F15.002 * 4332310F15.075	Polished Chrome Stainless Steel	617 798 SR Ø



Kitchen and Bar Faucets

Pekoe®

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PR
 Durable brass Washerless of Brass body at Metal lever h 28-3/4" (730 supply hoses connectors Spout height Spout clearation 	 Kitchen Faucet Durable brass construction Washerless ceramic disc valve cartridge Brass body and swivel spout Metal lever handle 28-3/4" (730 mm) long braided flexible supply hoses with 3/8" (10 mm) compression 	Ą	* 4332001.002 * 4332001.075	Polished Chrome Stainless Steel	527 677
	Pekoe Kitchen Faucet • Same as 4332.001 • 1.5 gpm/5.7 L/min maximum flow	CEO	* 4332001F15.002	Polished Chrome	527
				МАР	SR C
	 Pekoe Pull-Down Bar Faucet Durable brass construction Washerless ceramic disc valve cartridge Brass body and swivel spout Metal lever handle 28-3/4" (730 mm) long braided flexible supply hoses with 3/8" (10 mm) compression connectors Pull-down spray with adjustable spray pattern Spout height: 10-3/4" (276 mm) Spout clearance: 6-5/8" (168 mm) 2.2 gpm/8.3 L/min maximum flow 	(Â)	4332410.002 4332410.075	Polished Chrome Stainless Steel	485 628
	Pekoe Pull-Down Bar Faucet • Same as 4332410 • 1.5 gpm/5.7 L/min maximum flow	CEO	* 4332410F15.002 * 4332410F15.075	Polished Chrome Stainless Steel	485 628
	 Pekoe Bar Faucet Durable brass construction Washerless ceramic disc valve cartridge Brass body and swivel spout Metal lever handle 28-3/4" (730 mm) long braided flexible supply hoses with 3/8" (10 mm) compression connectors Spout height: 10-3/4" (273 mm) Spout clearance: 7" (178 mm) 2.2 gpm/8.3 L/min maximum flow 	Â	4332400.002 4332400.075	Polished Chrome Stainless Steel	419 545
4Th	Pekoe Bar Faucet	CEO	 ★ 4332400F15.002 ★ 4332400F15.075 	Polished Chrome Stainless Steel	419
	 Same as 4332400 1.5 gpm/5.7 L/min maximum flow 			MAP	SR (
c	Pekoe Deck Plate • Metal construction • Available for use with all Pekoe faucets • Includes putty plate		⊳ M961850-0020A ⊳ M961850-0750A	Polished Chrome Stainless Steel	17 25

American Standard

Edgewater®

Kitchen and Bar Faucets

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRIC
	Edgewater Semi-Professional Kitchen Faucet • SelectFlo® spray head: 4-function spray with pause offers stream, spray, mist and jet sprays to perform various kitchen tasks • Ceramic disc valve cartridge assures smooth, precise valve control and a lifetime of drip-free, maintenance-free performance • Metal body and handle • 1.5 gpm/5.7 L/min maximum flow • Features Re-Trax® retraction system • Swivel spout • Spout height: 19" (482 mm) • Spout clearance: 8-11/16" (220 mm) • Edgewater Bull Down Kitchen Faucet	CEO A	2016 Red Dot Design Edgewater	Polished Chrome Stainless Steel	aucet
	 Edgewater Pull-Down Kitchen Faucet SelectFlo spray head: 4-function spray with pause offers stream, spray, mist and jet sprays to perform various kitchen tasks Ceramic disc valve cartridge assures smooth, precise valve control and a lifetime of drip-free, maintenance-free performance Metal body and handle 1.5 gpm/5.7 L/min maximum flow Features Re-Trax retraction system Includes Dock-Tite® magnetic docking system Brass swivel spout Spout height: 17-7/16" (443 mm) Spout clearance: 9" (228 mm) 	CEO (A)	4932300.002 4932300.075	Polished Chrome Stainless Steel	474 606
	Edgewater Pull-Down Bar Faucet Single function pull-down spray head Ceramic disc valve cartridge assures smooth, precise valve control and a lifetime of drip-free, maintenance-free performance Metal body and handle 1.5 gpm/5.7 L/min maximum flow Features Re-Trax retraction system Includes Dock-Tite magnetic docking system Brass swivel spout Spout height: 14-7/16" (336 mm) Spout clearance: 7-5/16" (201 mm)	CEO A	4932410.002 4932410.075	Polished Chrome Stainless Steel	413 496
*	Edgewater Deck Plate • Metal construction • Available for use with all Edgewater kitchen faucets • Includes putty plate		1660151.002 1660151.075	Polished Chrome Stainless Steel	34 41 (SR)
56	 SelectFlo[®] Scrub Brush – Set of 2 Snaps onto faceplate of SelectFlo kitchen faucets Soft, gray bristles for gentle scrubbing Firmer, blue bristles for tough scrubbing 		1660403.007		16

See pages 4-63 for available kitchen sinks.

American Standard

Portsmouth[®]

Kitchen and Bar Faucets

Portsmouth

DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
 Portsmouth Pull-Down Kitchen Faucet Washerless ceramic disc valve cartridge Metal lever handle Can be mounted with or without supplied metal escutcheon Braided flexible supply hoses with 3/8" (10 mm) compression connections Brass swivel spout Pull-down spray Retracts effortlessly 1.8 gpm/6.8 L/min maximum flow Spout height: 15-1/2" (392 mm) Spout clearance: 8-3/4" (222 mm) 	CEO (Â)	4285300.002 4285300.075	Polished Chrome Stainless Steel	419 524
Portsmouth Pull-Down Kitchen Faucet • Same as 4285300 • 1.5 gpm/5.7 L/min maximum flow		* 4285300.F15.002	Polished Chrome	419
 Portsmouth High-Arc Kitchen Faucet With Side Spray Washerless ceramic disc valve cartridge Metal lever handle Can be mounted with or without supplied metal escutcheon Braided flexible supply hoses with 3/8" (10 mm) compression connections Brass swivel spout Color-matched side spray 2.2 gpm/8.3 L/min maximum flow Spout height: 14-1/2" (368 mm) Spout clearance: 8-1/2" (210 mm) 	(Å)	4285051.002 4285051.075	Polished Chrome Stainless Steel	369 468
Portsmouth High-Arc Kitchen Faucet With Side Spray • Same as 4285051 • 1.5 gpm/5.7 L/min maximum flow	CEO	* 4285051F15.002	Polished Chrome	360
 Portsmouth Pull-Out Kitchen Faucet Washerless ceramic disc valve cartridge Metal lever handle Can be mounted with or without supplied metal escutcheon Braided flexible supply hoses with 3/8" (10 mm) compression connections Swivel spout Pull-out spray with adjustable spray pattern 1.8 gpm/6.8 L/min maximum flow Spout clearance: 6-5/16" (160 mm) 	CEO A	4285100.002 4285100.075	Polished Chrome Stainless Steel	358 441
Portsmouth Pull-Out Kitchen Faucet • Same as 4285100 • 1.5 gpm/5.7 L/min maximum flow		* 4285100F15.075 * 4285100F15.224	Stainless Steel Oil Rubbed Bronze	430 457



Portsmouth®

Kitchen and Bar Faucets

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
	 Portsmouth Kitchen Faucet With Side Spray Washerless ceramic disc valve cartridge Metal lever handle Can be mounted with or without supplied metal escutcheon Braided flexible supply hoses with 3/8" (10 mm) compression connections Cast brass swivel spout Color-matched side spray 2.2 gpm/8.3 L/min maximum flow Spout height: 7" (178 mm) 	Â	* 4285001.075	Stainless Steel	425
	Portsmouth Kitchen Faucet With Side Spray • Same as 4285001 • 1.5 gpm/5.7 L/min maximum flow	CEO	* 4285001F15.002	Polished Chrome	328
	 Portsmouth Pull-Down Bar Faucet Washerless ceramic disc valve cartridge Metal lever handle Can be mounted with or without supplied metal escutcheon Braided flexible supply hoses with 3/8" (10 mm) compression connections Brass swivel spout Pull-down spray 2.2 gpm/8.3 L/min maximum flow Spout height: 13-1/4" (337 mm) Spout clearance: 9-1/4" (235 mm) 	(Å)	4285410.002 4285410.075	Polished Chrome Stainless Steel	325 408
÷	Portsmouth Pull-Down Bar Faucet • Same as 4285410 • 1.5 gpm/5.7 L/min maximum flow	CEO	4285410F15.002	Polished Chrome	325

See pages 4-63 for available kitchen sinks.

Portsmouth



Quince®

Kitchen and Bar Faucets

Quince

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
	 Quince Semi-Professional Kitchen Faucet Washerless (40 mm) ceramic disc valve cartridge Braided flexible supply hoses with 3/8" (10 mm) compression connectors Metal lever handle Can be mounted with or without supplied escutcheon Spray head with adjustable spray pattern Spout height: 20" (508 mm) Spout clearance: 5-1/4" (133 mm) 2.2 gpm/8.3 L/min maximum flow 	(Å)	4433350.002 4433350.075	Polished Chrome Stainless Steel	562 678
	Quince Semi-Professional Kitchen Faucet • Same as 4433350 • 1.5 gpm/5.7 L/min maximum flow	CEO	* 4433350F15 .002 * 4433350F15 .075	Polished Chrome Stainless Steel	562 678
	 Quince Pull-Down Kitchen Faucet Washerless (40 mm) ceramic disc valve cartridge Braided flexible supply hoses with 3/8" (10 mm) compression connectors Metal lever handle Can be mounted with or without supplied escutcheon Brass swivel spout Pull-out spray with adjustable spray pattern Re-Trax® spray head technology 2.2 gpm/8.3 L/min maximum flow Spout clearance: 8-3/4" (223 mm) 	Æ	4433300.002 * 4433300.075	Polished Chrome Stainless Steel	331 419
				МАР	
	Quince Pull-Down Kitchen Faucet • Same as 4433300 • 1.5 gpm/5.7 L/min maximum flow	CEO	4433300F15.002 * 4433300F15.075 * 4433300F15.224	Polished Chrome Stainless Steel Oil Rubbed Bronze	331 409 430
	 Quince Pull-Out Kitchen Faucet Washerless (40 mm) ceramic disc valve cartridge Braided flexible supply hoses with 3/8" (10 mm) compression connectors Metal lever handle Can be mounted with or without supplied escutcheon Swivel spout Pull-out spray with adjustable spray pattern 2.2 gpm/8.3 L/min maximum flow Spout height: 8-7/16" (215 mm) 	Æ	4433100.002 4433100.075	Polished Chrome Stainless Steel	303 385
	Quince Pull-Out Kitchen Faucet • Same as 4433100 • 1.5 gpm/5.7 L/min maximum flow	CEO	* 4433100F15.002 * 4433100F15.075 * 4433100F15.224	Polished Chrome Stainless Steel Oil Rubbed Bronze	303 376 398 Sr Ø

American Standard

Quince®

Kitchen and Bar Faucets

DESCRIPTION		SKU #	COLOR/FINISH	LIST PRIC
QuinceSingle Control Kitchen Faucet• Washerless (40 mm) ceramic disc valve cartridge• Braided flexible supply hoses with 3/8" (10 mm) compression connectors• Metal lever handle• Can be mounted with or without supplied escutcheon• Cast brass swivel spout• Color-matched hand spray• 2.2 gpm/8.3 L/min maximum flow• Spout height: 7-5/16" (186 mm)• Spout clearance: 5-1/4" (133 mm)	(Å)	4433001.002 4433001.075	Polished Chrome Stainless Steel	276 358
Quince Single Control Kitchen Faucet • Same as 4433001 • 1.5 gpm/5.7 L/min maximum flow	CEO	* 4433001F15.002 * 4433001F15.075 * 4433001F15.224	Polished Chrome Stainless Steel Oil Rubbed Bronze	276 349 376
Quince Pull-Down Bar Faucet • Washerless (40 mm) ceramic disc valve cartridge • Braided flexible supply hoses with 3/8" (10 mm) compression connectors • Metal lever handle • Can be mounted with or without supplied escutcheon • Brass swivel spout • Pull-down sprayer • 2.2 gpm/8.3 L/min maximum flow • Spout height: 14" (358 mm) • Spout clearance: 9-3/8" (238 mm)	Â	4433410.002 * 4433410.075	Polished Chrome Stainless Steel	276 341
Quince Pull-Down Bar Faucet • Same as 4433410 • 1.5 gpm/5.7 L/min maximum flow	CEO	* 4433410F15.002 * 4433410F15.075 * 4433410F15.224	Polished Chrome Stainless Steel Oil Rubbed Bronze	276 333 355 SR 2



Heritage®

Kitchen and Bar Faucets

Heritage

DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
 Heritage Wall-Mount Sink Faucet All brass construction 1/4 turn washerless ceramic disc valve (Super Europa) cartridges Porcelain lever handles Brass gooseneck swivel spout 2.2 gpm/8.3 L/min maximum flow 	Æ	7293252.002	Polished Chrome	413
Heritage Wall-Mount Sink Faucet • Same as 7293252 • 1.5 gpm/5.7 L/min maximum flow	CEO	* 7293252F15.002	Polished Chrome	403
Heritage Wall-Mount Sink Faucet • All brass construction • 1/4 turn washerless ceramic disc valve (Super Europa) cartridges • Porcelain lever handles • 5-5/8" (143 mm) swivel spout • Soap dish • 2.2 gpm/8.3 L/min maximum flow	Ą	7295252.002	Polished Chrome	424
Heritage Wall-Mount Sink Faucet • Same as 7295252 • 1.5 gpm/5.7 L/min maximum flow	CEO	* 7295252F15.002	Polished Chrome	424
Heritage Wall-Mount Sink Faucet • All brass construction • 1/4 turn washerless ceramic disc valve (Super Europa) cartridges • Porcelain lever handles • 8" (203 mm) swivel spout • 2.2 gpm/8.3 L/min maximum flow	Â	7298252.002	Polished Chrome	385 (SR)
Heritage Wall-Mount Sink Faucet • Same as 7298252 • 1.5 gpm/5.7 L/min maximum flow	CEO	* 7298252F15.002	Polished Chrome	385 Sr Ø

American Standard

Reliant+®

Kitchen and Bar Faucets

DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Reliant+ Pull-Out Kitchen Faucet	ADA	4205104.002 4205104.075	Polished Chrome Stainless Steel	276 358
 Washerless (47 mm) ceramic disc valve cartridge Swivel spout Deluxe pull-out spray with adjustable spray pattern and lock and turn activation button Spray spout length: 9-1/8" (232 mm) Spout clearance: 6" (152 mm) Can be mounted with or without supplied escutcheon Braided flexible supply hoses with 2/8" (10 pm) compression comparatore 				

3/8" (10 mm) compression connectors • 2.2 gpm/8.3 L/min maximum flow



Colony[®] PRO

Kitchen and Bar Faucets

 DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Colony PRO Single Control Kitchen Faucet • Ceramic disc valve cartridge (35 mm) • 1.5 gpm/5.7 L/min maximum flow • Brass swivel spout • Metal lever handle • Spout height: 5-7/8" (150 mm) • Spout reach: 8-1/2" (216 mm) • Spout clearance: 4-7/8" (125 mm) • Integrated braided stainless steel supply lines	CEO (Â)	7074010.002	Polished Chrome	137
Colony PRO Single Control Kitchen Faucet • Ceramic disc valve cartridge (35 mm) • 1.5 gpm/5.7 L/min maximum flow • Brass swivel spout • Metal deck plate and metal lever handle • Spout height: 5-7/8" (150 mm) • Spout reach: 8-1/2" (216 mm) • Spout clearance: 4-7/8" (125 mm) • Integrated braided stainless steel supply lines	CEO (Â)	7074000.002 7074000.075	Polished Chrome Stainless Steel	137 164
Colony PRO Single Control Kitchen Faucet With Side Spray • Ceramic disc valve cartridge (35 mm) • 1.5 gpm/5.7 L/min maximum flow • Brass swivel spout • Metal lever handle • With side spray • Spout height: 5-7/8" (150 mm) • Spout reach: 8-1/2" (216 mm) • Spout relearance: 4-7/8" (125 mm) • Integrated braided stainless steel supply lines • Color-matched side spray	CEO (Â)	* 7074020.002	Polished Chrome	164
Colony PRO Single Control Kitchen Faucet With Side Spray • Ceramic disc valve cartridge (35 mm) • 1.5 gpm/5.7 L/min maximum flow • Brass swivel spout • Metal deck plate and metal lever handle • With side spray • Spout height: 5-7/8" (150 mm) • Spout reach: 8-1/2" (216 mm) • Spout clearance: 4-7/8" (125 mm) • Integrated braided stainless steel supply lines • Color-matched side spray	CEO (Â)	7074040.002 7074040.075	Polished Chrome Stainless Steel	164 197
Colony PRO Single Control With Side Spray Through Deck Kitchen Faucet • Ceramic disc valve cartridge (35 mm) • 1.5 gpm/5.7 L/min maximum flow • Brass swivel spout • Metal deck plate and metal lever handle • With side spray through deck plate • Spout height: 5-7/8" (150 mm) • Spout reach: 8-1/2" (216 mm) • Spout clearance: 4-7/8" (125 mm) • Integrated braided stainless steel supply lines • Color-matched side spray	CEO (Â)	7074030.002 * 7074030.075	Polished Chrome Stainless Steel	164 197

Color-matched side spray

American Standard

Colony[®] PRO

Kitchen and Bar Faucets

DESCRIPTION		SKU #	COLOR/FINISH	LIST PRIC
Colony PRO Pull-Out Kitchen Faucet • Ceramic disc valve cartridge (40 mm) • 1.5 gpm/5.7 L/min maximum flow • Brass swivel spout • Metal deck plate and metal lever handle • Pull-out spray with adjustable spray pattern • Spout height: 7-3/4" (197 mm) • Spout reach: 8-5/8" (220 mm) • Spout clearance: 5-1/2" (139 mm) • Integrated braided stainless steel supply lines	CEO (Å)	7074100.002 7074100.075	Polished Chrome Stainless Steel	248 297
Colony PRO Pull-Down Kitchen Faucet Ceramic disc valve cartridge (35 mm) 1.5 gpm/5.7 L/min maximum flow Brass swivel spout Metal deck plate and metal lever handle Pull-down spray with adjustable spray pattern Spout height: 14-5/8" (372 mm) Spout reach: 8-7/8" (227 mm) Spout clearance: 7-7/8" (201 mm) Integrated braided stainless steel supply lines	CEO A	7074300.002 7074300.075	Polished Chrome Stainless Steel	303 364
Colony PRO Two Handle Kitchen Faucet • Ceramic disc valve cartridges • 1.5 gpm/5.7 L/min maximum flow • Brass swivel spout • Metal deck plate and metal lever handles • Low arc spout • Spout height: 6" (153 mm) • Spout reach: 8-1/2" (216 mm) • Spout clearance: 5" (128 mm)		7074500.002	Polished Chrome	132
Colony PRO Two Handle Kitchen Faucet With Side Spray • Ceramic disc valve cartridges • 1.5 gpm/5.7 L/min maximum flow • Brass swivel spout • Metal deck plate and metal lever handles • Low arc spout • With side spray • Spout height: 6" (153 mm) • Spout reach: 8-1/2" (216 mm) • Spout clearance: 5" (128 mm)	CEO (Å)	7074501.002	Polished Chrome	159
Colony PRO Two Handle Kitchen Faucet • Ceramic disc valve cartridges • 1.5 gpm/5.7 L/min maximum flow • Brass swivel spout • Metal deck plate and metal lever handles • High arc spout • LESS side spray • Spout height: 12-1/2" (318 mm) • Spout reach: 7-5/8" (195 mm) • Spout clearance: 7-1/4" (183 mm)	CEO (Â)	7074550.002	Polished Chrome	159

See pages 4-63 for available kitchen sinks.

Colony PRO

American Standard

Colony[®] PRO

Kitchen and Bar Faucets

DESCRIPTION		SKU #	COLOR/FINISH	LIST PRI
Colony PRO Two Handle Kitchen Faucet • Ceramic disc valve cartridges • 1.5 gpm/5.7 L/min maximum flow • Brass swivel spout • Metal deck plate and metal lever handles • High arc spout • With side spray • Spout height: 12-1/2" (318 mm) • Spout reach: 7-5/8" (195 mm) • Spout clearance: 7-1/4" (183 mm)	CEO (A)	7074551.002	Polished Chrome	187
Colony PRO Two Handle Bar Faucet • Ceramic disc valve cartridges • 1.5 gpm/5.7 L/min maximum flow • Brass swivel spout • Metal deck plate and metal lever handles • High arc spout • Spout height: 10-7/8" (275 mm) • Spout reach: 5-3/4" (146 mm) • Spout clearance: 7-3/8" (186 mm)	CEO (Â)	7074400.002 7074400.075	Polished Chrome Stainless Steel	111 132
Colony PRO Two Handle Bar Faucet • Ceramic disc valve cartridges • 1.5 gpm/5.7 L/min maximum flow • Brass swivel spout • Metal deck plate and metal lever handles • Aerator end • Low arc spout • Spout height: 6-7/8" (174 mm) • Spout reach: 6-1/4" (159 mm) • Spout clearance: 4-5/8" (117 mm)	CEO (A)	7074140.002	Polished Chrome	111
Colony PRO Two Handle Laundry Faucet • Ceramic disc valve cartridges • 1.5 gpm/5.7 L/min maximum flow • Brass swivel spout • Metal deck plate and metal lever handles • Hose end • Low arc spout • Unrestricted flow • Spout height: 6-7/8" (174 mm) • Spout reach: 6-1/4" (159 mm) • Spout clearance: 4-5/8" (117 mm)	CEO (Å)	7074240.002	Polished Chrome	111

American Standard

Colony[®] Choice

Kitchen and Bar Faucets

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICI
	Colony Choice Kitchen Faucet • Ceramic disc valve cartridge (40 mm) • Durable cast brass waterway with 1/2" (13 mm) male inlet shanks • Brass swing spout • Spout height: 6-1/8" (155 mm) • Spout reach: 8-1/2" (218 mm) • Spout clearance: 5-1/8" (129 mm) • Metal deck plate and metal lever handle • Color-matched side spray • 2.2 gpm/8.3 L/min maximum flow	(Å)	4175701.002	Polished Chrome	189
	Colony Choice Kitchen Faucet • Same as 4175701 • 1.5 gpm/5.7 L/min maximum flow	CEO	4175701F15.002	Polished Chrome	189
	Colony Choice Kitchen Faucet • Ceramic disc valve cartridge (40 mm) • Durable cast brass waterway with 1/2" (13 mm) male inlet shanks • Brass swing spout • Spout height: 6-1/8" (155 mm) • Spout reach: 8-1/2" (218 mm) • Spout reach: 8-1/2" (218 mm) • Spout clearance: 5-1/8" (129 mm) • Metal deck plate and metal lever handle • Color-matched spray through escutcheon • 2.2 gpm/8.3 L/min maximum flow	(Å)	* 4175703.002	Polished Chrome	189
	Colony Choice Kitchen Faucet • Same as 4175703 • 1.5 gpm/5.7 L/min maximum flow	CEO	4175703F15.002	Polished Chrome	189
	Colony Choice Kitchen Faucet • Ceramic disc valve cartridge (40 mm) • Durable cast brass waterway with 1/2" (13 mm) male inlet shanks • Brass swing spout • Spout height: 6-1/8" (155 mm) • Spout reach: 8-1/2" (218 mm) • Spout clearance: 5-1/8" (129 mm) • Metal deck plate and metal lever handle • Less spray • 2.2 gpm/8.3 L/min maximum flow	Â	4175700.002	Polished Chrome	160
	Colony Choice Kitchen Faucet • Same as 4175700 • 1.5 gpm/5.7 L/min maximum flow	CEO	* 4175700F15.002	Polished Chrome	160



Colony[®] Soft

Kitchen and Bar Faucets

 DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
 Colony Soft Pull-Out Kitchen Faucet Metal lever handle Can be mounted with or without supplied escutcheon 20" (508 mm) braided flexible supply hoses with 3/8" (10 mm) compression connectors Swivel spout Spout height: 7-3/16" (183 mm) Spout clearance: 3-13/16" (97 mm) Pull-out spray with adjustable spray pattern No visible button or toggles – simply pull down to switch from stream to spray Washerless ceramic disc valve cartridge (47 mm) 2.2 gpm/8.3 L/min maximum flow 	Â	4175100.002 4175100.075	Polished Chrome Stainless Steel	269 349
Colony Soft Pull-Out Kitchen Faucet • Same as 4175100 • 1.5 gpm/5.7 L/min maximum flow	CEO	4175100F15.002 4175100F15.075	Polished Chrome Stainless Steel	269 349
Colony Soft Pull-Down Kitchen Faucet • Metal lever handle • Can be mounted with or without supplied escutcheon • 20" (508 mm) braided flexible supply hoses with 3/8" (10 mm) compression connectors • Brass swivel spout • Spout height: 14-5/8" (371 mm) • Spout clearance: 8" (203 mm) • Pull-down spray with adjustable spray pattern and pause feature • Washerless ceramic disc valve cartridge (40 mm) • 2.2 gpm/8.3 L/min maximum flow	Â	4175300.002 4175300.075	Polished Chrome Stainless Steel	303 385
Colony Soft Pull-Down Kitchen Faucet • Same as 4175300 • 1.5 gpm/5.7 L/min maximum flow	CEO	* 4175300F15.002 * 4175300F15.075	Polished Chrome Stainless Steel	303 385
Colony Soft Kitchen Faucet With Side Spray • Ceramic disc valve cartridges (40 mm) • Durable cast brass waterway with 1/2" (13 mm) male inlet shanks • Cast brass swivel spout • Spout length: 8-1/2" (216 mm) • Spout length: 6-1/8" (155 mm) • Spout height: 6-1/8" (130 mm • Metal deck plate and metal lever handle • Color-matched side spray • 2.2 gpm/8.3 L/min maximum flow	Â	4175501.002	Polished Chrome	247
Colony Soft Kitchen Faucet • Same as 4175501 • 1.5 gpm/5.7 L/min maximum flow	CEO	* 4175501F15.002	Polished Chrome	247

See pages 4-63 for available kitchen sinks.

American Standard

Colony Soft

 DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Colony Soft Kitchen Faucet With Side Spray Through Deck • Ceramic disc valve cartridges (40 mm) • Durable cast brass waterway with 1/2" (13 mm) male inlet shanks • Cast brass swivel spout • Spout height: 6-1/8" (155 mm) • Spout clearance: 5-1/8" (129 mm) • Metal deck plate and metal lever handle • Color-matched spray through escutcheon • 2.2 gpm/8.3 L/min maximum flow	Â	* 4175503.002	Polished Chrome	247
Colony Soft Kitchen Faucet With Side Spray Through Deck Same as 4175503 • 1.5 gpm/5.7 L/min maximum flow	CEO	* 4175503F15.002	Polished Chrome	247
Colony Soft Kitchen Faucet • Ceramic disc valve cartridges (40 mm) • Durable cast brass waterway with 1/2" (13 mm) male inlet shanks • Cast brass swivel spout • Spout height: 6-1/8" (155 mm) • Spout clearance: 5-1/8" (129 mm) • Metal deck plate and metal lever handle • 2.2 gpm/8.3 L/min maximum flow	Â	4175500.002	Polished Chrome	207
Colony Soft Kitchen Faucet • Same as 4175500 • 1.5 gpm/5.7 L/min maximum flow	CEO	4175500F15.002	Polished Chrome	207
 Colony Soft 2-Handle Kitchen Faucet With Side Spray 1/4 turn washerless ceramic disc valve cartridges Durable cast brass waterway with 1/2" (13 mm) male inlet shanks Metal deck plate and metal lever handles Brass gooseneck swivel spout Spout height: 12" (305 mm Spout clearance: 7-1/2" (191 mm) Color-matched side spray 2.2 gpm/8.3 L/min maximum flow 	Â	4275551.002 4275551.075	Polished Chrome Stainless Steel	240 335
Colony Soft 2-Handle Kitchen Faucet With Side Spray • Same as 4275551 • 1.5 gpm/5.7 L/min maximum flow	CEO	* 4275551F15.002 * 4275551F15.075	Polished Chrome Stainless Steel	240 335
 Colony Soft Kitchen Faucet 1/4 turn washerless ceramic disc valve cartridges Durable cast brass waterway with 1/2" (13 mm) male inlet shanks Metal deck plate and metal lever handles Brass gooseneck swivel spout Spout height: 12" (305 mm) Spout clearance: 7-1/2" (191 mm) LESS spray 2.2 gpm/8.3 L/min maximum flow 	Â	4275550.002	Polished Chrome	205
Colony Soft Kitchen Faucet • Same as 4275550 • 1.5 gpm/5.7 L/min maximum flow	CEO	4275550F15.002	Polished Chrome	205



Colony[®] Soft

Kitchen and Bar Faucets

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
	Colony Soft Kitchen Faucet With Side Spray • 1/4 turn washerless ceramic disc valve cartridges • Durable cast brass waterway with 1/2" (13 mm) male inlet shanks • Metal deck plate and metal lever handles • Cast brass swivel spout • Spout length: 8-1/4" (210 mm) • Spout clearance: 5" (127 mm) • Color-matched side spray • 2.2 gpm/8.3 L/min maximum flow	(Å)	4275501.002	Polished Chrome	229
	Colony Soft Kitchen Faucet With Side Spray • Same as 4275501 • 1.5 gpm/5.7 L/min maximum flow	CEO	* 4275501F15.002	Polished Chrome	229
	Colony Soft Kitchen Faucet • 1/4 turn washerless ceramic disc valve cartridges • Durable cast brass waterway with 1/2" (13 mm) male inlet shanks • Metal deck plate and metal lever handles • Cast brass swivel spout • Spout length: 8-1/4" (210 mm) • Spout clearance: 5" (127 mm) • Less spray • 2.2 gpm/8.3 L/min maximum flow	(Å)	4275500.002	Polished Chrome	193
	Colony Soft Kitchen Faucet • Same as 4275500 • 1.5 gpm/5.7 L/min maximum flow	CEO	4275500F15.002	Polished Chrome	193
	Colony Soft Bar Sink Faucet • 1/4 turn washerless ceramic disc valve cartridges • Durable cast brass waterway with 1/2" (13 mm) male inlet shanks • Metal deck plate and metal lever handles • Brass swivel spout • Spout height: 13-1/16" (332 mm) • Spout clearance: 7-1/8" (181 mm) • 2.2 gpm/8.3 L/min maximum flow	(Å)	2475500.002 2475500.075	Polished Chrome Stainless Steel	149 208
TAA	Colony Soft Bar Sink Faucet • Same as 2475500 • 1.5 gpm/5.7 L/min maximum flow	CEO	2475500F15.002 2475500F15.075	Polished Chrome Stainless Steel	149 208
	Colony Soft Bar Sink Faucet • Same as 2475500 • Less spout		* 2475500M1.002	Polished Chrome	138

See pages 4-63 for available kitchen sinks.

American Standard

Colony[®] Soft

Kitchen and Bar Faucets

DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
 Colony Soft Laundry Faucet 1/4 turn washerless ceramic disc valve cartridges Durable cast brass waterway with 1/2" (13 mm) male inlet shanks Metal deck plate and metal lever handles Brass swivel spout Hose end Unrestricted flow Spout height: 4-3/4" (120 mm) Spout clearance: 3" (75 mm) 	(Å)	2475540.002	Polished Chrome	145
Colony Soft Laundry Faucet • 1/4 turn washerless ceramic disc valve cartridges • Durable cast brass waterway with 1/2" (13 mm) male inlet shanks • Metal deck plate and metal lever handles • Brass swivel spout • 2.2 gpm/8.3 L/min maximum flow • Spout height: 4-3/4" (120 mm) • Spout clearance: 3" (75 mm)	(Å)	2475550.002	Polished Chrome	150
Colony Soft Laundry Faucet • Same as 2475550 • 1.5 gpm/5.7 L/min maximum flow	CEO	2475550F15.002	Polished Chrome	150

See pages 4-63 for available kitchen sinks.



Accessories

Kitchen and Bar Faucets

DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
 Liquid Soap Dispenser Brass construction Accommodates up to 2-3/8" (60 mm) thick counter tops Refills from top 	4503120.002 4503120.013 4503120.075 * 4503120.224 4503120.278	Polished Chrome Polished Nickel Stainless Steel Oil Rubbed Bronze Legacy Bronze	99 121 121 129 132
 Extension Kit Extends shank 2-1/4" (57 mm) For use on: 4" centersets with 1/2" (13 mm) male inlet shanks Top mount kitchens with 1/2" (13 mm) male inlet shanks 	⊳ M960131-0070A		35

 \triangleright Parts Program (Non-Premier)

American Standard

WaterSense® Certified Faucets

All American Standard bathroom faucets are WaterSense certified for high performance and water efficiency. Flowing at **1.2 gpm/4.5 L/min**, more efficient than the Environmental Protection Agency's (EPA) strict WaterSense maximum flow rate requirement of **1.5 gpm/5.7 L/min**, all American Standard residential lavatory faucets incorporate pressure-compensating aerators that provide 45% water savings over standard models without sacrificing performance.











This WaterSense label is your confirmation that the product has met the U.S. Environmental Protection Agency (EPA) criteria for exceptional performance while reducing water use by 20% or more.

WaterSense is a voluntary partnership program launched by the U.S. Environmental Protection Agency to designate product and services that conserve water and perform as intended. WaterSense is a registered trade/service mark of the EPA.

American Standard

WaterSense® Certified Showers

American Standard offers a variety of WaterSense and CEC certified showering options for high performance and water efficiency. Meeting the Environmental Protection Agency's (EPA) strict maximum flow rate of **2.0 gpm/7.8 L/min,** American Standard's residential showering options provide over 20% water savings versus standard models without sacrificing performance.





This WaterSense label is your confirmation that the product has met the U.S. Environmental Protection Agency (EPA) criteria for exceptional performance while reducing water use by 20% or more.

WaterSense is a voluntary partnership program launched by the U.S. Environmental Protection Agency to designate product and services that conserve water and perform as intended. WaterSense is a registered trade/service mark of the EPA.



Bathroom Faucets at a Glance...

Our faucets feature:

- Drip Free Ceramic Disc Valves on 100% of our product offering
- Water Efficient Options WaterSense® certified lavatory faucets and showers (page 328)
- Lead Free Lavatory Faucets
- Freestanding Tub Fillers (page 337)
- Bathroom Accessories (pages 504-515)
- Showering Options (pages 516-545)




American Standard



Flash® Roman Tub Filler Overview

- Valve and trim packaged separately
- Install valve prior to trim selection no trim damage during construction
- Integrated hand shower diverter

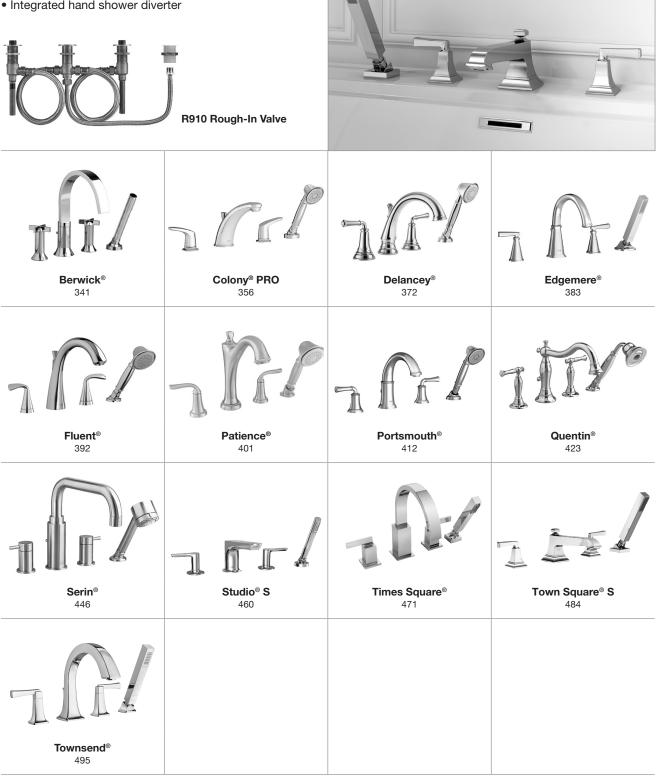


American Standard

Designed for Faster Installation

Flat Back Allows the valve to be mounted flush with the cross brace

Cast Brass Body..... Offers strong, durable construction



Provides fast and easy installation without adaptors, reducing leak points

Allows flushing and testing of valve prior to installing cartridge

Stainless Steel Retaining Ring with Flats Secures test cap/cartridge in place and eliminates need for screws

Straight Screwdriver Stops Ensures easy servicing at the valve (on applicable models)

Key Features



Flat Back

- Intuitive flat back feature means you'll achieve a secure and solid mount every time using a 2 x 4 cross brace
- Designed to work in tight spaces



Test Cap

- The test cap makes sweat-in and flush-testing simple and fast
- No cartridge to remove



Stainless Steel Retaining Ring with Flats

- Secures test cap and cartridge in place
- Flats make installation and servicing even more convenient
- No screws, no hassles


More Connections to Choose From

Universal Connection	CPVC Connection	PEX Crimp Connection	Cold Expansion PEX Connection	PEX Crimp Elbow Connection	Cold Expansion Elbow PEX Connection	Stub-Out Connection
(Female Sweat/ Male Thread NPT)		(ASTM F1807)	(ASTM F1960)	(ASTM F1807)	(ASTM F1960)	
RU101/RU101SS	RU109/RU109SS	RU107/RU107SS	RU108/RU108SS	RU107E/	RU108E/	RU102/RU102SS
Works with:	Works with:	Works with:	Works with:	RU107ESS	RU108ESS	Works with:
 1/2" Copper Pipe 1/2" Iron Pipe 1/2" CPVC Adaptors 1/2" PEX Adaptors 	 Standard CPVC Piping No additional adaptors needed 	 Type PEX A, B and C (Crimp PEX) No additional adaptors needed 	 Type PEX A (Cold Expansion PEX) No additional adaptors needed 	Works with: • Type PEX A, B and C (Crimp PEX) • No additional adaptors needed	Works with: • Type PEX A (Cold Expansion PEX) • No additional adaptors needed	1/2" Press- connect fittings



332 List Price Guide 2020

One-Piece Pressure Balance Cartridge with Double Ceramic Technology

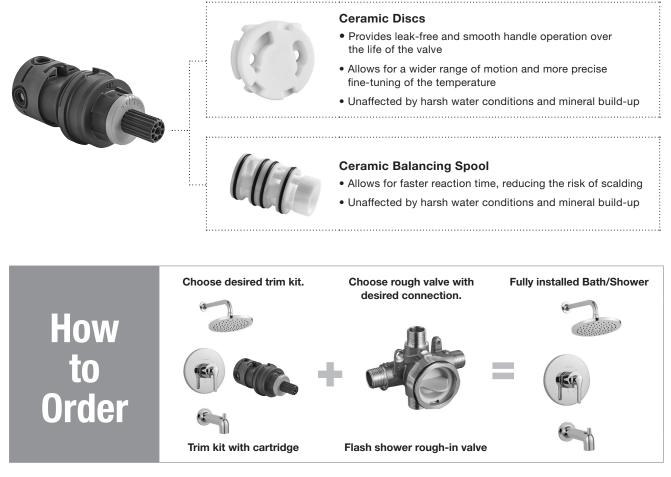

Trim Options

wessel How	S S	6		Z		Ĩ,
Berwick®	Colony® PRO	Delancey®	Edgemere®	Fluent®	Patience®	Portsmouth [®]
Â					2	
	G			*		
© <u>∭</u> Quentin®	Reliant 3®	Serin®	Studio® S	Times Square®	Town Square® S	Townsend®

Bathroom Faucets

American Standard

Style and Selection

	Berwick®	Colony [®] PRO	Delancey®	Edgemere®	Fluent®
Widespread	7.	352	370	382	390
Monoblock	F 340	352	371	382	390
Vessel	340				
2-Handle Centerset		355	371	382	391
Roman Tub Filler	341	2 F c l 356	372	383	392
Freestanding Tub Filler	342	356			
Bath/Shower Trim	343	357	373	384	393
Shower System Trim	345		375		
Accessories	349	359	378	386	396

334 List Price Guide 2020

American Standard

Style and Selection

Patience®	Portsmouth®	Quentin®	Reliant 3®	Serin [®]	
100 HO	410	422			Widespread
400	410	422	434	444	Monoblock
400		422		445	Vessel
	411				2-Handle Centerset
401	412	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		446	Roman Tub Filler
				446	Freestanding Tub Filler
402	413	424	437	447	Bath/Shower Trim
404	415	426		451	Shower System Trim
407	419	430	440	455	Accessories

407 American Standard

Style and Selection

	Studio [®] S	Times Square [®]	Town Square [®] S	Townsend®	
Widespread	1	470	482	1 494	
Monoblock	459	470	482	494	
Vessel	459				
2-Handle Centerset			483		
Roman Tub Filler	460	471	484	495	
Freestanding Tub Filler	461	472	484		
Bath/Shower Trim	462	473	485	496	
Shower System Trim	464	475	487	498	
Accessories	467	479	490	502	

336 List Price Guide 2020

American Standard

Freestanding Tub Fillers

Bathroom Faucets

oootananig				Daunoonni	auccio
	Description		SKU #	Color/Finish	List Price
	Contemporary Round Freestanding Tub Filler With Personal Shower • Brass construction and 1/4 turn washerless ceramic disc valve cartridge • Personal shower features 59" (150 cm) long hose with 1.8 gpm/6.8 L/min maximum flow • Metal lever handle • Overall height: 44-3/4" (1137 mm) • Spout reach: 11-1/4" (286 mm) • Level adjustable rough • Metal hand shower • Shower bracket pivots 60°	CEO	T064951.002 T064951.295 T064951.243	Polished Chrome Brushed Nickel Matte Black	1,076 1,507 1,614
	For use with Flash® freestanding tub filler rough-in	valve		МАР	SR Ø
	Contemporary Square Freestanding Tub Filler With Personal Shower • Brass construction and 1/4 turn washerless ceramic disc valve cartridge • Personal shower features 59" (150 cm) long hose with 1.8 gpm/6.8 L/min maximum flow • Metal lever handle • Overall height: 44-5/8" (1133 mm) • Spout reach: 10-3/8" (264 mm) • Level adjustable rough • Metal hand shower • Shower bracket pivots 60°	CEO	T184951.002 T184951.295	Polished Chrome Brushed Nickel	1,128 1,579
	For use with Flash freestanding tub filler rough-in v	alve		MAP	SR Ø
	 Town Square[®] S Freestanding Tub Filler With Personal Shower Brass construction and 1/4 turn washerless ceramic disc valve cartridge Personal shower features 59" (150 cm) long hose with 1.8 gpm/6.8 L/min maximum flow Metal lever handle Overall height: 43-1/2" (1105 mm) Spout reach: 8-1/2" (218 mm) Metal hand shower Shower bracket pivots 60° 	CEO	T455951.002 T455951.295 T455951.013 T455951.278	Polished Chrome Brushed Nickel Polished Nickel Legacy Bronze	1,230 1,722 1,722 1,845
	For use with Flash freestanding tub filler rough-in v	alve		МАР	SR Ø
	Flash Freestanding Tub Filler Rough-in Valve • Brass construction • 1/2" NPT threaded inlets • Level adjustable rough • Test plugs included • Must order trim separately		R950 R950SS	N/A Screwdriver Stops	204 235
	Cadet [®] Freestanding Tub Filler With Personal Shower • Brass construction and 1/4 turn washerless ceramic disc valve cartridge • Personal shower features 59" (150 cm) long hose with 1.8 gpm/6.8 L/min maximum flow • Metal lever handle • Overall height: 43" (1094 mm) • Spout reach: 8-1/8" (206 mm) • Metal hand shower • Includes installation supply hoses – no additional rough-in required	CEO	2764951.002 2764951.295 2764951.278	Polished Chrome Brushed Nickel Legacy Bronze	816 1,115 1,224

American Standard


Sleek and elegant, the **Berwick Collection** delivers a graceful, ribbon-like water flow from its precisely arched spout. With elegant lever handles, it makes a stunning statement.



American Standard

Bathroom Faucets

Berwick

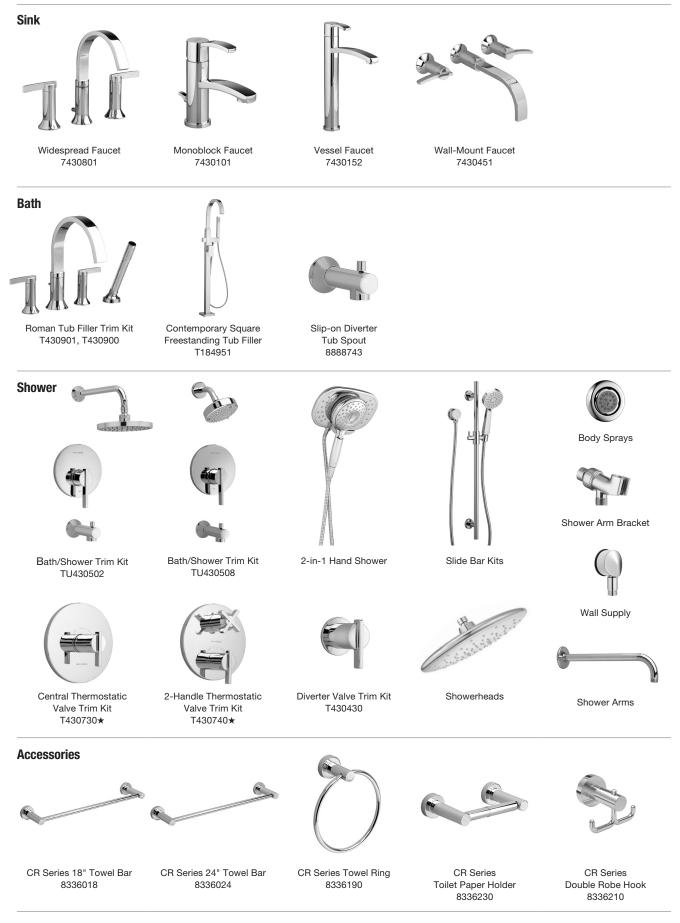

★ DISCONTINUED. Available while supplies last.

Berwick

Sink and Bath Faucets

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRIC
Centred by	Berwick Widespread Faucet	ADA	7430801.002 7430801.295	Polished Chrome Brushed Nickel	497 695
NAMO RAT	 Brass construction Washerless ceramic disc valve cartridges Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Brass spout Metal lever handles Cast brass valve bodies with flexible hose 	CEO			
	connections for 6" – 12" (152 – 305 mm) installations • Metal Speed Connect [®] pop-up drain			MA	P <u>S</u> R 🖉
	Berwick Monoblock Faucet	ÂDĂ	7430101.002 7430101.295	Polished Chrome Brushed Nickel	362 505
Control for the second	 Brass construction Washerless ceramic disc valve cartridge Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Cast brass body Metal lever handle Adjustable Hot Limit Safety Stop Braided flexible hoses with 3/8" (10 mm) compression connectors 	CEO	140101.235		303
	 Includes Red/Blue indicators Metal Speed Connect pop-up drain 			MA	P 🗊 🖉
Confield by	Berwick Single Control Vessel Faucet	ADA	7430152.002 7430152.295	Polished Chrome Brushed Nickel	467 655
Ten oursa	 Brass construction Washerless ceramic disc valve cartridge Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Cast brass body Metal lever handle Adjustable Hot Limit Safety Stop Braided flexible hoses with 3/8" (10 mm) compression connectors Includes Red/Blue indicators Grid drain 	CEO		MA	P (SR) @
	Berwick		7430151.002	Polished Chrome	429
	Single Control Vessel Faucet Same as 7430152 Less drain 	CEO	* 7430151.295	Brushed Nickel	602
				MA	P 🗊 🖉
0	Berwick 2-Handle Wall-Mount Faucet	ADA	7430451.002 7430451.295	Polished Chrome Brushed Nickel	530 741
	 Brass construction Washerless ceramic disc valve cartridges Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Brass spout Metal lever handles 	CEO			
	Cast brass valve bodyGrid drain			MA	P 🕅 🖉
	• For use with 7430101		2064101P.002 2064101P.295	Polished Chrome Brushed Nickel	40 56
				MA	

340 List Price Guide 2020



Sink and Bath Faucets

 DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
 Berwick Roman Tub Filler Trim Kit With Personal Shower Brass construction All personal showers feature 5' (152 cm) long hose Metal lever handles Personal shower with 1.8 gpm/6.8 L/min maximum flow 	CEO	* T430901.002 * T430901.295	Polished Chrome Brushed Nickel	800 1,119
For use with Flash [®] roman tub filler rough-in valve	R910		MA	P <u>SR</u> 🖉
Berwick Roman Tub Filler Trim Kit • Brass construction • Metal lever handles • Less personal shower	Â	* T430900.002 * T430900.295	Polished Chrome Brushed Nickel	634 888
For use with Flash roman tub filler rough-in valve F	900		MA	P SR Ø
 Flash Roman Tub Filler Rough-In Valve With Personal Shower Brass construction and washerless 1/4 turn ceramic disc valve cartridges 1/2" copper inlets Connections to spout can be made via flexible hoses (provided) or 1/2" copper sweat connections 14 gpm/52.9 L/min maximum flow rate at 40 psi 8" – 16" (203 – 406 mm) flexible installation Adjustable rough-in: 2-1/2" (64 mm) maximum deck thickness Includes hand shower rough-in 		R910	N/A	286
 Flash Roman Tub Filler Rough-In Valve Brass construction and washerless 1/4 turn ceramic disc valve cartridges 1/2" copper inlets Connections to spout can be made via flexible hoses (provided) or 1/2" copper sweat connections 14 gpm/52.9 L/min maximum flow rate at 40 psi 8" - 16" (203 - 406 mm) flexible installation Adjustable rough-in: 2-1/2" (64 mm) maximum deck thickness 		R900	N/A	163

Berwick



Sink and Bath Faucets

\sim	
C	
Ð	
\mathbf{m}	

	DI
	C Fi W
	•
	•
	•
	•
	•
\square	•
	_

DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Contemporary Square Freestanding Tub Filler With Personal Shower • Brass construction and 1/4 turn washerless ceramic disc valve cartridge • Personal shower features 59" (150 cm) long hose with 1.8 gpm/6.8 L/min maximum flow • Metal lever handle • Overall height: 44-3/4" (1137 mm) • Spout reach: 11-1/4" (286 mm) • Metal hand shower • Shower bracket pivots 60°	A) CEO	T184951.002 T184951.295	Polished Chrome Brushed Nickel	1,128 1,579
For use with Flash [®] freestanding tub filler rough-ir	n valves		MAP) 🗊 🖉
Flash Freestanding Tub Filler Rough-In Valve • Brass construction • 1/2" NPT threaded inlets • Level adjustable • Test plugs included • Must order trim separately		R950 R950SS	N/A Screwdriver Stops	204 235

342 List Price Guide 2020



Bath/Shower Trim Kits and Valves

Berwick

HOW TO ORDER	desir desir desir trim kit with cartridge Flash [®] Sh	rough-in valve with ed connection.	Fully installed Bath/S	
	DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
	 Berwick Bath/Shower Trim Kit Includes Double Ceramic pressure balance cartridge 6-3/4" (173 mm) rain showerhead, 2.5 gpm/9.5 L/min maximum flow 12" (300 mm) brass shower arm Metal wall escutcheon Metal lever handle Metal slip-on diverter tub spout 	TU43050: TU43050:		393 539
	For use with Flash shower rough-in valves		M	
	 Berwick Shower Only Trim Kit Includes Double Ceramic pressure balance cartridge 6-3/4" (171 mm) rain showerhead, 2.5 gpm/9.5 L/min maximum flow 12" (300 mm) brass shower arm Metal wall escutcheon Metal lever handle 	ADA TU43050 TU43050		350 479
	For use with Flash shower rough-in valves		M	IAP SR Ø
	Berwick Valve Only Trim Kit • Includes Double Ceramic pressure balance cartridge • Metal wall escutcheon • Metal lever handle	TU430500		262 358
	For use with Flash shower rough-in valves		M	IAP SR Ø
	 Berwick Bath/Shower Trim Kit Includes Double Ceramic pressure balance cartridge Water-saving 4-3/4" (120 mm) 3-function showerhead, 1.75 gpm/6.6 L/min maximum fl Shower arm and flange Metal wall escutcheon Metal lever handle Metal slip-on diverter tub spout 	* TU430504 CEO * TU430504		393 539
	For use with Flash shower rough-in valves			
	 balance cartridge Water-saving 4-3/4" (120 mm) 3-function showerhead, 1.75 gpm/6.6 L/min maximum flow Shower arm and flange Metal wall escutcheon 	ADA CEO * TU43050 * TU43050		350 479
1	 Metal lever handle For use with Flash shower rough-in valves 			AP SR Ø

American Standard

Bath/Shower Trim Kits and Valves

	DESCRIPTION	SKU #		LIST PRIC
	Flash [®] Shower Rough-In Valve With Universal Connections • 1/2" Male NPT/Sweat inlets/outlets accept 1/2" copper, 1/2" iron pipe, PEX or CPVC adapters • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim	RU101 RU101SS	Screwdriver Stops	64 91
	For use with TU series pressure balance bath/shower trim kits			
	Flash Shower Rough-In Valve With Stub-out Connections • 1/2" Stub-out inlets/outlets accept 1/2" press-connect fittings • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU102 RU102SS	Screwdriver Stops	64 91
	Flash Shower Rough-In Valve With PEX Crimp Connections • 1/2" PEX crimp inlets/Universal outlets (ASTM F1807) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU107 RU107SS	Screwdriver Stops	64 91
FOT	Flash Shower Rough-In Valve With PEX Crimp Elbow Connections • 1/2" PEX crimp elbow inlets/Universal outlets (ASTM F1807) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim	RU107E RU107ESS	Screwdriver Stops	84 111
	For use with TU series pressure balance bath/shower trim kits			
	Flash Shower Rough-In Valve With PEX Cold Expansion Connections • 1/2" PEX cold expansion inlets/Universal outlets (ASTM F1960) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU108 RU108SS	Screwdriver Stops	64 91
	Flash Shower Rough-In Valve With PEX Cold Expansion Elbow Connections • 1/2" PEX cold expansion elbow inlets/Universal outlets (ASTM F1960) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU108E RU108ESS	Screwdriver Stops	84 111
	Flash Shower Rough-In Valve With CPVC Connections • 1/2" CPVC inlets/Universal outlets • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU109 RU109SS	Screwdriver Stops	84 111

* When combined with Double Ceramic pressure balance cartridge.

American Standard

Bath/Shower Trim Kits and Valves

DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
 Berwick 2-Handle Thermostatic Valve Trim Kit Metal wall escutcheon Metal handles Less valve (must be purchased separately) 	(Å)	* T430740.002 * T430740.295	Polished Chrome Brushed Nickel	249 349
For use with rough-in valves R520, R522, R522S, R	523 and	d R523S		У БК 🖉
 2-Handle Thermostatic Rough-In Valve With On/Off and Volume Control 1/2" (13 mm) NPT inlets/outlets 5.9 gpm/22.3 L/min at 40 psi Top handle controls On/Off and Volume 1 Function All Ceratherm[™] valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature changes Adjustable temperature selections Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T Requires separate diverter valve when used with more than one outlet 		* R520	N/A	358 SR 20
 2-Handle Thermostatic Rough-In Valve With Built-In 2-Way Diverter 1/2" (13 mm) NPT inlets/outlets 6.5 gpm/24.6 L/min at 40 psi Top handle controls On/Off, Volume and Diverter functions Diverts to 2 discrete functions All Ceratherm valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature changes Adjustable temperature selections Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T Requires twin ell for use with diverter tub spout 	CEO	* R522	N/A	325 SR Ø
Same as Above Diverts to 2 Discrete/1 Shared Function 		* R522S	N/A	325 (SR) Ø
 2-Handle Thermostatic Rough-In Valve With Built-In 3-Way Diverter 1/2" (13 mm) NPT inlets/outlets 6.5 gpm/24.6 L/min at 40 psi Top handle controls On/Off, Volume and Diverter functions Diverts to 3 discrete functions All Ceratherm[™] valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature selections Adjustable temperature selections Hot Limit Safety Stop is set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T Requires twin ell for use with diverter tub spout 	CEO	* R523	N/A	352 SR 20
Same as Above • Diverts to 3 Discrete/2 Shared Functions		* R523S	N/A	352 Sr 2

American Standard

Berwick®

Bath/Shower Trim Kits and Valves

DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Berwick Central Thermostatic Valve Trim Kit • Metal wall escutcheon • Metal lever handle • Less valve (must be purchased separately) • Must order with On/Off volume control to complete system	á Dà	T430730.002 T430730.295	Polished Chrome Brushed Nickel	173 243
For use with rough-in valves R510 and R530			MA	₽ <u>(</u> SR) <i>Q</i>
 Central Thermostatic Rough-In Valve 1/2" (13 mm) NPT inlets/outlets 9.5 gpm/35.9 L/min at 40 psi All Ceratherm[™] valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature changes Adjustable temperature selections Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T Must order with On/Off volume control to complete system When used as a bath/shower a separate diverter valve is required (R422, R422S, R433, R433S or diverter tub spout) Requires twin ell for use with diverter tub spout 	*	R510	N/A	381 (SR) 🖉
 Central Thermostatic Rough-In Valve 3/4" (19 mm) NPT inlets/outlets 16 gpm/60.6 L/min at 40 psi All Ceratherm valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature changes Adjustable temperature selections Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T Must order with On/Off volume control to complete system When used as a bath/shower a separate diverter valve is required (R422, R422S, R433, R433S or diverter tub spout) Requires twin ell for use with diverter tub spout 	*	R530	N/A	436

Berwick

American Standard


Bath/Shower Trim Kits and Valves


Berwick

Berwick[®]

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
	 Berwick On/Off Volume Control Valve Trim Kit Metal lever handle Less valve (must be purchased separately) 	(Å)	T430700.002 T430700.295	Polished Chrome Brushed Nickel	83 116
	For use with rough-in valves R701 and R711			MAI	SR) Ø
	 1/2" (13 mm) On/Off Volume Control Rough-In Valve 1/2" (13 mm) inlet/outlet 		R701	N/A	69
	 3/4" (19 mm) On/Off Volume Control Rough-In Valve 3/4" (19 mm) inlet/outlet 		R711	N/A	105
					SR Ø
	Berwick Diverter Valve Trim Kit • Metal lever handle • Less valve • Valve must be purchased separately	Â	T430430.002 T430430.295	Polished Chrome Brushed Nickel	109 153
	For use with rough-in valves R422, R422S, R43	3 and R433S		MAI	SR 0
	 2-Way In-Wall Diverter Rough-In Valve Controls water flow between 2 outlets (shower or sprays) 2 Discrete functions 	CEO	R422	N/A	205
					SR Ø
	Same as Above Diverts to 2 Discrete/1 Shared function 		R422S	NA	205 Sr 🖉
	 3-Way In-Wall Diverter Rough-In Valve Controls water flow between 3 outlets (shower or sprays) 3 Discrete functions 	CEO	R433	NA	232
and a					2

American Standard

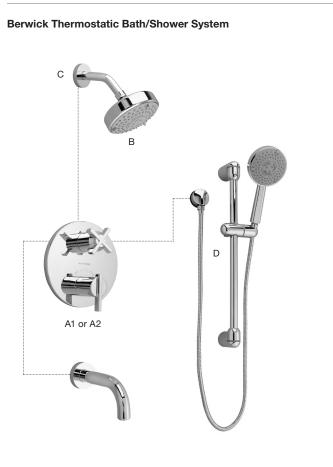

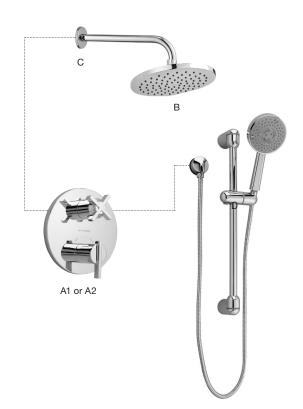

Berwick Thermostatic Shower System

Berwick Thermostatic Bath/Shower System

				LIST PRICE	FOR SYSTEM
	DESCRIPTION	QTY	SKU #	002	295
А	Berwick 2-Handle Thermostatic Valve Trim Kit	1	T430740	249	349
в	3-Function Rain Showerhead	1	1660650	100	151
С	Modern Shower Arm	1	1660241	26	36
D	3-Function Rain Slide Bar Kit	1	1662551	325	487
Е	Serin [®] Tub Spout	1	8888421	118	165
equir	red Components (not shown) 2-Handle Thermostatic Rough-In Valve With Built-In 3-Way Diverter – Non-Shared Function	1	R523	3	52
OR	(Choose R523 or R523S)		HOLO		02
2	2-Handle Thermostatic Rough-In Valve With Built-In 3-Way Diverter - Shared Function	1	R523S	3	52
	Bath/S	hower 9	System Total	1,170	1,540
erwi	ck Thermostatic Shower System		,		
				LIST PRICE	FOR SYSTEM
	DESCRIPTION	ΟΤΥ	SKII #	002	205

				LIST FRICE	
	DESCRIPTION	QTY	SKU #	002	295
Α	Berwick 2-Handle Thermostatic Valve Trim Kit	1	T430740	249	349
В	Studio® S 8" Rain Showerhead	1	1660527	97	135
С	12" Wall-Mount Right Angle Shower Arm	1	1660194	89	134
D	3-Function Rain Slide Bar Kit	1	1662551	325	487
Requi	red Components (not shown)				
1	2-Handle Thermostatic Rough-In Valve With Built-In 2-Way Diverter - Non-Shared Function	1	R522	32	25

0	R (Choose R522 or R522S)				
2	2 2-Handle Thermostatic Rough-In Valve With Built-In 2-Way Diverter - Shared Fu	unction	1	R522S	

Shower System Total

American Standard

1,085

325

1,430

Accessories

Berwick

DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
CR Series 18" Towel Bar • Brass bar • All metal construction • Concealed mounting	8336018.002 8336018.295	Polished Chrome Brushed Nickel	58 82
CR Series 24" Towel Bar • Brass bar • All metal construction • Concealed mounting	8336024.002 8336024.295	Polished Chrome Brushed Nickel	62 86
CR Series Towel Ring • 7" (178 mm) diameter ring • All metal construction • Concealed mounting	8336190.002 8336190.295	Polished Chrome Brushed Nickel	36 50
CR Series Double Robe Hook • All metal construction • Concealed mounting	8336210.002 8334210.295	Polished Chrome Brushed Nickel	27 38
CR Series Toilet Paper Holder • All metal construction • Concealed mounting	8336230.002 8334230.295	Polished Chrome Brushed Nickel	47 67

American Standard

The **Colony PRO Collection** is designed to complement any bathroom. Gently curved spout and lever handles add to its universal appeal and dependability.



American Standard

Sink



Widespread Faucet 7075800



Monoblock Faucet 7075100



Centerset Faucet 7075000



Centerset Faucet 7075200

Colony PRO



Shower

Bath



Cadet[®] Freestanding Roman Tub Filler Trim Kit T075920, T075921 Tub Filler



Tub Spout



Slide Bar Kits

Shower Arm Bracket



Wall Supply



Shower Arms

Accessories



Bath/Shower Trim Kit

TU075508

Showerheads



2-Handle Shower Trim Kit

TU075508

Hand Showers



2-in-1 Hand Shower





C Series 24" Towel Bar 8337024

C Series Towel Ring 8337190

Toilet Paper Holder 8337230

C Series

Double Robe Hook



	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Control by WHEN RET	 Colony PRO Widespread Faucet 1/4 turn washerless ceramic disc valve cartridges Valve bodies with flexible hose connections for 6" – 12" (152 – 305 mm) installations Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Metal spout Braided flexible supply hose with 3/8" (10 mm) compression connectors Red/Blue index buttons Metal lever handles Brass pop-up drain 	(Å) CEO	7075800.002 7075800.295 7075800.278	Polished Chrome Brushed Nickel Legacy Bronze	291 408 437
	 Colony PRO Widespread Faucet 1/4 turn washerless ceramic disc valve cartridges Valve bodies with flexible hose connections for 6" – 12" (152 – 305 mm) installations Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Metal spout Braided flexible supply hose with 3/8" (10 mm) compression connectors Red/Blue index button Metal lever handles 50/50 pop-up drain 	ADA CEO	7075802.002 7075802.295 7075802.278	Polished Chrome Brushed Nickel Legacy Bronze	282 395 423
Centre of the other	Colony PRO Monoblock Faucet • 35 mm ceramic disc valve cartridge with an adjustable Hot Limit Safety Stop • Braided flexible supply hoses with 3/8" (10 mm) compression connectors • All metal construction • Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator • Red/Blue index button • Metal lever handle • Brass pop-up drain	Â) Ceo	7075100.002 7075100.295 7075100.278	Polished Chrome Brushed Nickel Legacy Bronze	187 261 280
Cetting by Level BST	Colony PRO Monoblock Faucet • 35 mm ceramic disc valve cartridge with an adjustable Hot Limit Safety Stop • Braided flexible supply hoses with 3/8" (10 mm) compression connectors • All metal construction • Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator • Red/Blue index button • Metal lever handle • 50/50 pop-up drain	CEO	7075102.002 7075102.295 7075102.278	Polished Chrome Brushed Nickel Legacy Bronze	177 248 267
Certine by United by United by State	Colony PRO Monoblock Faucet • 35 mm ceramic disc valve cartridge with an adjustable Hot Limit Safety Stop • Braided flexible supply hoses with 3/8" (10 mm) compression connectors • All metal construction • Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator • Metal lever handle • Less pop-up hole and rod • Less drain	ADA CEO	7075104.002 * 7075104.295 7075104.278	Polished Chrome Brushed Nickel Legacy Bronze	168 236 253



	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
0	Escutcheon PlateFor use with 7075100 series		2000102P.002 2000102P.295 2000102P.278	Polished Chrome Brushed Nickel Legacy Bronze	44 62 67 SR Ø
	 Colony PRO Single Control Centerset Faucet 35 mm ceramic disc valve cartridge with an adjustable Hot Limit Safety Stop Braided flexible supply hoses with 3/8" (10 mm) compression connectors Metal body with color-matched underbody Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Red/Blue index button Metal lever handle Brass pop-up drain 	ADA CEO	7075000.002 7075000.295 7075000.278	Polished Chrome Brushed Nickel Legacy Bronze	153 215 231
	 Colony PRO Single Control Centerset Faucet 35 mm ceramic disc valve cartridge with an adjustable Hot Limit Safety Stop Braided flexible supply hoses with 3/8" (10 mm) compression connectors Metal body with color-matched underbody Water-conserving 1.2 gpm4.5 L/min pressure-compensating aerator Metal lever handle 50/50 pop-up drain 	(A) CEO	7075002.002 7075002.295 7075002.278	Polished Chrome Brushed Nickel Legacy Bronze	145 202 217
	 Colony PRO Single Control Centerset Faucet 35 mm ceramic disc valve cartridge with an adjustable Hot Limit Safety Stop Braided flexible supply hoses with 3/8" (10 mm) compression connectors Metal body with color-matched underbody Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Red/Blue index button Metal lever handle Less pop-up hole and rod Grid drain 	CEO	7075006.002 * 7075006.295 * 7075006.278	Polished Chrome Brushed Nickel Legacy Bronze	147 205 220
	 Colony PRO Single Control Centerset Faucet 35 mm ceramic disc valve cartridge with an adjustable Hot Limit Safety Stop Braided flexible supply hoses with 3/8" (10 mm) compression connectors Metal body with color-matched underbody Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Red/Blue index button Metal lever handle With pop-up hole and rod Less drain 	Â) CEO	7075005.002 7075005.295 7075005.278	Polished Chrome Brushed Nickel Legacy Bronze	135 190 204



	DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
Error Renor	 Colony PRO Single Control Centerset Faucet 35 mm ceramic disc valve cartridge with an adjustable Hot Limit Safety Stop Braided flexible supply hoses with 3/8" (10 mm) compression connectors Metal body with color-matched underbody Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Red/Blue index button Metal lever handle Less pop-up hole and rod Less drain 	ADA 7075004.002 7075004.295 7075004.278 CEO * 7075004.278	Polished Chrome Brushed Nickel Legacy Bronze	135 190 204
	Colony PRO Single Control Centerset Faucet • 35 mm ceramic disc valve cartridge with an adjustable Hot Limit Safety Stop • Braided flexible supply hoses with 3/8" (10 mm) compression connectors • Metal body with color-matched underbody • Water-conserving 0.5 gpm/1.9 L/min vandal-resistant pressure-compensating spray • Red/Blue index button • Metal lever handle • Brass pop-up drain	2075050.002 CEO	Polished Chrome	159
	Colony PRO Single Control Centerset Faucet 35 mm ceramic disc valve cartridge with an adjustable Hot Limit Safety Stop Braided flexible supply hoses with 3/8" (10 mm) compression connectors Metal body with color-matched underbody Water-conserving 0.5 gpm/1.9 L/min vandal-resistant pressure-compensating spray Red/Blue index button Metal lever handle Grid drain	2075056.002 CEO	Polished Chrome	152
	Colony PRO Single Control Centerset Faucet 35 mm ceramic disc valve cartridge with an adjustable Hot Limit Safety Stop • Braided flexible supply hoses with 3/8" (10 mm) compression connectors • Metal body with color-matched underbody • Water-conserving 0.5 gpm/1.9 L/min vandal-resistant pressure-compensating spray • Red/Blue index button • Metal lever handle • With pop-up hole and rod • Less drain	ADA CEO	Polished Chrome	141
	Colony PRO Single Control Centerset Faucet • 35 mm ceramic disc valve cartridge with an adjustable Hot Limit Safety Stop • Braided flexible supply hoses with 3/8" (10 mm) compression connectors • Metal body with color-matched underbody • Water-conserving 0.5 gpm/1.9 L/min vandal-resistant pressure-compensating spray • Red/Blue index button • Metal lever handle • Less pop-up hole and rod • Less drain	7075054.002	Polished Chrome	141



	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Contraction of the second seco	Colony PRO 2-Handle Centerset Faucet 40 mm ceramic disc valve cartridges 1/2" (13 mm) male inlet shanks Metal body with color-matched underbody Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Red/Blue index buttons Metal lever handles Brass pop-up drain	(Å) CEO	7075200.002 7075200.295 7075200.278	Polished Chrome Brushed Nickel Legacy Bronze	128 178 192
Central Definition	Colony PRO 2-Handle Centerset Faucet • 40 mm ceramic disc valve cartridges • 1/2" (13 mm) male inlet shanks • Metal body with color-matched underbody • Water-conserving 1.0 gpm/3.8 L/min pressure-compensating aerator • Red/Blue index buttons • Metal lever handles • With metal drain	ADA CEO	7075200F10.002	Polished Chrome	124
Com Point Refine	 Colony PRO 2-Handle Centerset Faucet Same as 7075200F10 Water-conserving 0.5 gpm/1.9 L/min pressure-compensating aerator 	ADA CEO	7075F05200.002	Polished Chrome	119
Centration of the second	Colony PRO 2-Handle Centerset Faucet • 40 mm ceramic disc valve cartridges • 1/2" (13 mm) male inlet shanks • Metal body with color-matched underbody • Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator • Red/Blue index buttons • Metal lever handles • 50/50 pop-up drain	CEO	7075202.002 7075202.295 7075202.278	Polished Chrome Brushed Nickel Legacy Bronze	119 166 178
Contraction of the second seco	Colony PRO 2-Handle Centerset Faucet • 40 mm ceramic disc valve cartridges • 1/2" (13 mm) male inlet shanks • Metal body with color-matched underbody • Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator • Red/Blue index buttons • Metal lever handles • With pop-up hole and rod • Less drain	(Å) CEO	7075205.002 7075205.295 7075205.278	Polished Chrome Brushed Nickel Legacy Bronze	111 155 165
Centration of the second	Colony PRO Two-Handle Centerset Faucet • 40 mm ceramic disc valve cartridges • 1/2" (13 mm) male inlet shanks • Metal body with color-matched underbody • Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator • Red/Blue index buttons • Metal lever handles • Less pop-up hole and rod	ADA CEO	7075206.002 7075206.295 7075206.278	Polished Chrome Brushed Nickel Legacy Bronze	108 151 161

- Metal lever handles
 Less pop-up hole and rod
 Less drain

American Standard

DESCRIPTION		SKU #	COLOR/FINISH	LIST PRI
Colony PRO Roman Tub Filler Trim Kit With Personal Shower • Brass construction • Personal shower features 5' (152 cm) long hose, 1.8 gpm/6.8 L/min maximum flow • Metal lever handles	ADA CEO	T075921.002 T075921.295 T075921.278	Polished Chrome Brushed Nickel Legacy Bronze	524 733 786
For use with Flash [®] roman tub filler rough-in valve F Colony PRO Roman Tub Filler Trim Kit • Brass construction • Metal lever handles • Less personal shower	ADA	T075920.002 T075920.295 T075920.278	Polished Chrome Brushed Nickel Legacy Bronze	359 502 538
For use with Flash roman tub filler rough-in valve R	900			
 Flash Roman Tub Filler Rough-In Valve With Personal Shower Brass construction and washerless 1/4 turn ceramic disc valve cartridges 1/2" copper inlets Connections to spout can be made via flexible hoses (provided) or 1/2" copper sweat connections 14 gpm/52.9 L/min maximum flow rate at 40 psi 8" - 16" (203 - 406 mm) flexible installation Adjustable rough-in: 2-1/2" (64 mm) maximum deck thickness Includes hand shower rough-in 		R910	N/A	286
 Flash Roman Tub Filler Rough-In Valve Brass construction and washerless 1/4 turn ceramic disc valve cartridges 1/2" copper inlets Connections to spout can be made via flexible hoses (provided) or 1/2" copper sweat connections 14 gpm/52.9 L/min maximum flow rate at 40 psi 8" - 16" (203 - 406 mm) flexible installation Adjustable rough-in: 2-1/2" (64 mm) maximum deck thickness 		R900	N/A	163
Cadet [®] Freestanding Tub Filler With Personal Shower • Brass construction and 1/4 turn washerless ceramic disc valve cartridge • Personal shower features 59" (150 cm) long hose with 1.8 gpm/6.8 L/min maximum flow • Metal lever handle • Overall height: 43" (1094 mm) • Spout reach: 8-1/8" (206 mm) • Metal hand shower • Includes rough-in	CEO	2764951.002 2764951.295 2764951.278	Polished Chrome Brushed Nickel Legacy Bronze	816 1,115 1,224

Bath/Shower Trim Kits and Valves

HOW TO ORDER		rough-in valued connection	n.	Fully installed Bath/Sh	ower
	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
	Colony PRO Bath/Shower Trim Kit Includes Double Ceramic pressure balance cartridge Water-saving 3-3/4" (96 mm) showerhead, 1.75 gpm/6.6 L/min maximum flow Shower arm and flange Wall escutcheon with Red/Blue indicators Metal lever handle Slip-on diverter tub spout	CEO	TU075508.002 TU075508.295 TU075508.278	Polished Chrome Brushed Nickel Legacy Bronze	121 158 168
	For use with Flash shower rough-in valves				
	Colony PRO Shower Only Trim Kit • Includes Double Ceramic pressure balance cartridge • Water-saving 3-3/4" (96 mm) showerhead, 1.75 gpm/6.6 L/min maximum flow • Shower arm and flange • Wall escutcheon with Red/Blue indicators • Metal lever handle	(Å) CEO	TU075507.002 TU075507.295 TU075507.278	Polished Chrome Brushed Nickel Legacy Bronze	96 124 131
01	For use with Flash shower rough-in valves				
	Colony PRO Valve Only Trim Kit • Includes Double Ceramic pressure balance cartridge • Wall escutcheon with Red/Blue indicators • Metal lever handle For use with Flash shower rough-in valves	Â	TU075500.002 TU075500.295 TU075500.278	Polished Chrome Brushed Nickel Legacy Bronze	73 92 96
	Colony PRO Bath/Shower Trim Kit Less Showerhead • Includes Double Ceramic pressure balance cartridge • Shower arm and flange • Wall escutcheon with Red/Blue indicators • Metal lever handle • Slip-on diverter tub spout	I	TU075508XH.002 * TU075508XH.295 TU075508XH.278	Polished Chrome Brushed Nickel Legacy Bronze	119 155 165
	For use with Flash shower rough-in valves				
	Colony PRO Shower Only Trim Kit Less Showerhead • Includes Double Ceramic pressure balance cartridge • Shower arm and flange • Wall escutcheon with Red/Blue indicators • Metal lever handle For use with Flash shower rough-in valves	(Å)	TU075507XH.002 * TU075507XH.295 TU075507XH.278	Polished Chrome Brushed Nickel Legacy Bronze	94 121 128

American Standard

Bath/Shower Trim Kits and Valves

_					
_		DESCRIPTION	SKU #		LIST PRIC
		 Flash[®] Shower Rough-In Valve With Universal Connections 1/2" Male NPT/Sweat inlets/outlets accept 1/2" copper, 1/2" iron pipe, PEX or CPVC adapters Brass valve body Flow rate: 5.1 gpm @ 45 psi* Back-to-back capability Includes test plug with stainless steel ring Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits 	RU101 RU101SS	Screwdriver Stops	64 91
ļ		Flash Shower Rough-In Valve With Stub-out Connections • 1/2" Stub-out inlets/outlets accept 1/2" press-connect fittings • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU102 RU102SS	Screwdriver Stops	64 91
		Flash Shower Rough-In Valve With PEX Crimp Connections • 1/2" PEX crimp inlets/Universal outlets (ASTM F1807) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU107 RU107SS	Screwdriver Stops	64 91
(F	Flash Shower Rough-In Valve With PEX Crimp Elbow Connections • 1/2" PEX crimp elbow inlets/Universal outlets (ASTM F1807) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU107E RU107ESS	Screwdriver Stops	84 111
_		Flash Shower Rough-In Valve With PEX Cold Expansion Connections • 1/2" PEX cold expansion inlets/Universal outlets (ASTM F1960) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU108 RU108SS	Screwdriver Stops	64 91
		Flash Shower Rough-In Valve With PEX Cold Expansion Elbow Connections • 1/2" PEX cold expansion elbow inlets/Universal outlets (ASTM F1960) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU108E RU108ESS	Screwdriver Stops	84 111
1		Flash Shower Rough-In Valve With CPVC Connections • 1/2" CPVC inlets/Universal outlets • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU109 RU109SS	Screwdriver Stops	84 111

*When combined with Double Ceramic pressure balance cartridge.

American Standard

Colony[®] PRO

Accessories

	DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
	C Series 18" Towel Bar • Brass bar • All metal construction • Concealed mounting	8337018.002 8337018.013 8337018.295 8337018.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	58 82 82 88
				SR U
A	C Series 24" Towel Bar • Brass bar • All metal construction • Concealed mounting	8337024.002 8337024.013 8337024.295 8337024.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	62 86 86 92
•			MAI) îr 🖉
	C Series Towel Ring • 7" (178 mm) diameter ring • All metal construction • Concealed mounting	8337190.002 8337190.013 8337190.295 8337190.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	36 50 50 54
			MAI	P (SR) Ø
	C Series Double Robe Hook • All metal construction • Concealed mounting	8337210.002 8337210.013 8337210.295 8337210.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	27 38 38 38 8 8
	C Series Toilet Paper Holder • All metal construction • Concealed mounting	8337230.002 8337230.013 8337230.295 8337230.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	47 67 67 72

American Standard

The **Colony Soft Collection** is defined by subtle contours and a low profile. This practical design promises superior performance and years of enduring style.



Colony Soft

360 List Price Guide 2020

American Standard

Sink







Widespread Faucet 3875501

Centerset Faucet 2275500

Centerset Faucet 2175500

Bidet



Fixture-Mounted Bidet Fitting 3475501

Shower





Two- and Three-Handle Bath/Shower Trim Kits

Accessories





C Series 18" Towel Bar 8337018 C Series 24" Towel Bar 8337024 \bigcirc

C Series Towel Ring 8337190 C Series Toilet Paper Holder 8337230 5

C Series Double Robe Hook 8337210



	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Defined by Reno Ret	Colony Soft Widespread Faucet • 1/4 turn washerless ceramic disc valve cartridges • Cast brass valve bodies with reinforced flexible hose connections for 6" – 12" (152-305 mm) installations • 1/2" male pipe inlets • Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator • Cast brass spout • Metal lever handles • 50/50 pop-up drain	(Â) Ceo	3875501.002 * 3875501.295	Polished Chrome Brushed Nickel	320 447
Celler Vitro Ra Vitro Ra Vitro Ra Vitro Ra Vitro Ra Vitro Ra Vitro Ra Vitro Ra	 Colony Soft Widespread Faucet 1/4 turn washerless ceramic disc valve cartridges Cast brass valve bodies with reinforced flexible hose connections for 6" – 12" (152-305 mm) installations 1/2" male pipe inlets Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Cast brass spout Metal lever handles Metal Speed Connect[®] pop-up drain 	(Â) Ceo	3875509.002 * 3875509.295	Polished Chrome Brushed Nickel	342 480
Centre by MAN BAT	Colony Soft Centerset Faucet • 1/4 turn washerless ceramic disc valve cartridges • Durable cast brass 1/2" (13 mm) male inlet shanks • Metal body with color-matched underbody • Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator • Metal lever handles • 50/50 pop-up drain	(Â) CEO	2275500.002 2275500.295	Polished Chrome Brushed Nickel	134 189
Cellent by Revo Bat	 Colony Soft Centerset Faucet 1/4 turn washerless ceramic disc valve cartridges Durable cast brass 1/2" (13 mm) male inlet shanks Metal body with color-matched underbody Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Metal lever handles Metal Speed Connect pop-up drain 	(Â) CEO	2275509.002 2275509.295	Polished Chrome Brushed Nickel	151 211
Centred by Marko Rat	Colony Soft Centerset Faucet • 1/4 turn washerless ceramic disc valve cartridges • Durable cast brass 1/2" (13 mm) male inlet shanks • Metal body with color-matched underbody • Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator • Lever handles • Speed Connect pop-up drain	Â) CEO	2275503.002	Polished Chrome	116

American Standard

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Certified by APMO R&T	Colony Soft Centerset Faucet • 1/4 turn washerless ceramic disc valve cartridges	ÂDA CEO	2275505.002	Polished Chrome	121
	 Durable cast brass 1/2" (13 mm) male inlet shanks Metal body with color-matched underbody Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Metal lever handles With plug button With pop-up hole and rod Less drain 				
Carified by	Colony Soft Centerset Faucet	ÂDĂ	2175500.002 2175500.295	Polished Chrome Brushed Nickel	167 235
Catified by IAPMO R&T	 40 mm ceramic disc valve cartridge with an adjustable Hot Limit Safety Stop Durable cast brass 1/2" (13 mm) male inlet shanks Metal body with color-matched underbody Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Metal lever handle Red/Blue index button 50/50 pop-up drain 	CEO			
Centified by APMO R&T	 Colony Soft Centerset Faucet 40 mm ceramic disc valve cartridge with an adjustable Hot Limit Safety Stop Durable cast brass 1/2" (13 mm) male inlet shanks Metal body with color-matched underbody Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Metal lever handle Red/Blue index button Metal Speed Connect[®] pop-up drain 	(Å)	2175502.002 * 2175502.295	Polished Chrome Brushed Nickel	180 253
Certified by	Colony Soft Centerset Faucet	ÂDĂ	2175503.002	Polished Chrome	157
Garmo est	 40 mm ceramic disc valve cartridge with an adjustable Hot Limit Safety Stop Durable cast brass 1/2" (13 mm) male inlet shanks Metal body with color-matched underbody Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Metal lever handle Red/Blue index button Speed Connect pop-up drain 	CEO			
Carified by	Colony Soft Centerset Faucet	ÂDĂ	2175506.002	Polished Chrome	157
Centified by IAPMO R&T	 40 mm ceramic disc valve cartridge with an adjustable Hot Limit Safety Stop Durable cast brass 1/2" (13 mm) male inlet shanks Metal body with color-matched underbody Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Metal lever handle Red/Blue index button Less pop-up hole Grid drain 	CEO			



	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Certified by IMPINO R8T	 Colony Soft Centerset Faucet 40 mm ceramic disc valve cartridge with an adjustable Hot Limit Safety Stop Durable cast brass 1/2" (13 mm) male inlet shanks Metal body with color-matched underbody Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Metal lever handle Red/Blue index button With plug button With pop-up hole and rod Less drain 	(A) CEO	2175505.002	Polished Chrome	157
Certified by APMO R8T	Colony Soft Centerset Faucet • 40 mm ceramic disc valve cartridge with an adjustable Hot Limit Safety Stop • Durable cast brass 1/2" (13 mm) male inlet shanks • Metal body with color-matched underbody • Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator • Metal lever handle • Red/Blue index button • Less pop-up hole and rod • Less drain	CEO	★ 2175504.002	Polished Chrome	157



Bath/Shower Trim Kits and Valves

 DESCRIPTION		SKU #	COLOR/FINISH	LIST PRIC
 Colony 2-Handle Bath/Shower Valve and Trim Kit 1/4 turn washerless ceramic disc valve cartridges Cast brass valve bodies 1/2" (13 mm) NPT male threaded 1/2" (13 mm) sweat inlets, 1/2" (13 mm) NPT outlets "Easy Clean" showerhead with 2.5 gpm/9.5 L/min maximum flow Metal lever handles Slip-on diverter tub spout 	Â)	3275502.002	Polished Chrome	226
 Colony 2-Handle Shower Only Valve and Trim Kit 1/4 turn washerless ceramic disc valve cartridges Cast brass valve bodies 1/2" (13 mm) NPT male threaded 1/2" (13 mm) sweat inlets, 1/2" (13 mm) NPT outlets "Easy Clean" showerhead with 2.5 gpm/9.5 L/min maximum flow Metal lever handles 	Â	3275501.002	Polished Chrome	191
Colony Tub Filler Valve and Trim Kit • 1/4 turn washerless ceramic disc valve cartridges • Cast brass valve bodies • 1/2" (13 mm) NPT male threaded 1/2" (13 mm) sweat inlets, 1/2" (13 mm) NPT outlets • Metal lever handles • Wall-mount slip-on tub spout	Â	3275505.002	Polished Chrome	178
 Colony 3-Handle Bath/Shower Valve and Trim Kit 1/4 turn washerless ceramic disc valve cartridges Cast brass valve bodies 1/2" (13 mm) NPT male threaded 1/2" (13 mm) sweat inlets, 1/2" (13 mm) NPT outlets "Easy Clean" showerhead with 2.5 gpm/9.5 L/min maximum flow Metal lever handle Slip-on diverter tub spout 	Â)	3375502.002	Polished Chrome	268
Colony Soft/Colony Bidet Fitting • Cast brass valve bodies • 1/4 turn washerless ceramic disc valve cartridges • Vacuum breaker • Metal lever handle • Metal Speed Connect® pop-up drain	Â	3475501.002	Polished Chrome	760



Accessories

	DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
	C Series 18" Towel Bar • Brass bar • All metal construction • Concealed mounting	8337018.002 8337018.013 8337018.295 8337018.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	58 82 82 88
·			MAI	SR 🖉
A	C Series 24" Towel Bar • Brass bar • All metal construction • Concealed mounting	8337024.002 8337024.013 8337024.295 8337024.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	62 86 86 92
•			MAI) îr 🖉
	C Series Towel Ring • 7" (178 mm) diameter ring • All metal construction • Concealed mounting	8337190.002 8337190.013 8337190.295 8337190.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	36 50 50 54
	C Series Double Robe Hook • All metal construction • Concealed mounting	8337210.002 8337210.013 8337210.295 8337210.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	27 38 38 38 38
	C Series Toilet Paper Holder • All metal construction • Concealed mounting	8337230.002 8337230.013 8337230.295 8337230.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	47 67 67 72

366 List Price Guide 2019

American Standard





Inspired by the finer points of classic architecture, the **Delancey Collection** from American Standard transforms today's bathroom with its timeless character and enduring elegance. Worthy of the master retreat, impressive in the guest bath, this graceful style is engineered to last a lifetime.



American Standard

Bathroom Faucets

Sink



Widespread Faucet

7052807



Widespread Faucet

7052827







Monoblock Faucet 7052121




Centerset Faucet 7052207

Bath





- Roman Tub Filler Trim Kit T052901, T052900
- Tub Spouts

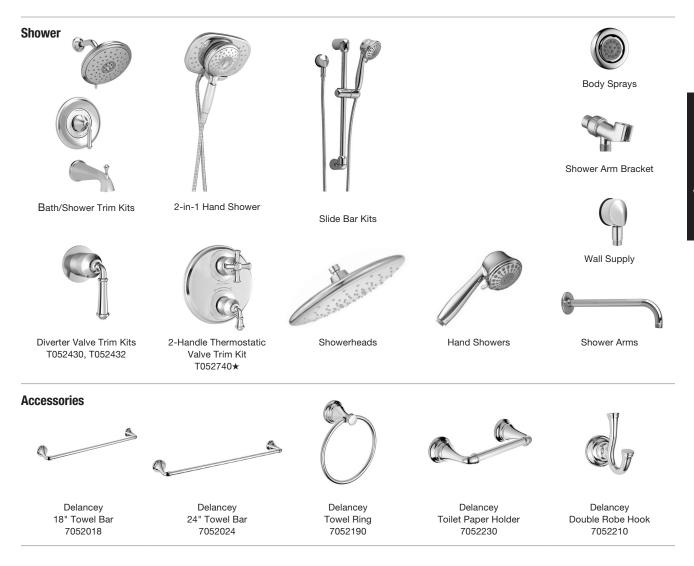



	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Contraction of the second seco	 Delancey Widespread Faucet Brass construction Washerless ceramic disc valve cartridges Valve bodies with integrated flexible hose connections for 6" - 12" (152 - 305 mm) installation Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Cast brass spout Metal lever handles Brass push pop-up drain 	ADA CEO	7052807.002 7052807.013 7052807.295 7052807.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	338 474 474 507
Contraction of the second seco	Delancey Widespread Faucet • Same as 7052807 • With Red/Blue temperature indicator markings • Less drain	CEO	7052814.002	Polished Chrome	303
				(
Control of the second s	 Delancey Widespread Faucet Brass construction Washerless ceramic disc valve cartridges Valve bodies with integrated flexible hose connections for 6" – 12" (152 – 305 mm) installation Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Cast brass spout Metal cross handles Brass push pop-up drain 	ADA CEO	7052827.002 7052827.013 7052827.295 7052827.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	338 474 474 507
Deficie by RPAD NAT	Delancey Monoblock Faucet • Brass construction • Washerless ceramic disc valve cartridges • Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator • Cast brass spout • Metal lever handle • Braided flexible hoses with 3/8" compression connectors • Brass push pop-up drain	CEO	7052107.002 7052107.013 7052107.295 7052107.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	256 359 359 384
Derive Resources	Delancey Monoblock Faucet • Same as 7052107 • With Red/Blue temperature indicator markings • Less drain	ADA CEO	7052114.002	Polished Chrome	236

American Standard

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Definite by Brind by	Delancey Monoblock Faucet • Brass construction • Washerless ceramic disc valve cartridges • Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator • Cast brass spout • Metal lever handle • Braided flexible hoses with 3/8" compression connectors • Brass push pop-up drain	(Â) CEO	7052121.002 7052121.013 7052121.295 7052121.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	292 409 409 439
Cetting by BAS	Delancey Monoblock Faucet • Same as 7052121 • With Red/Blue temperature indicator markings • Less drain	(Å) CEO	7052124.002	Polished Chrome	272
1.1				MAF	SR Ø
0	Escutcheon Plate • For use with 7052107, 7052114, 7052121 and 7052124		2000102P.002 2000102P.013 2000102P.295 2000102P.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	44 62 62 67
Certified by BAND RST	Delancey Centerset Faucet • Brass construction • Washerless ceramic disc valve cartridges • Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator • Cast brass spout • Metal lever handles • Brass push pop-up drain	(Å) CEO	7052207.002 7052207.013 7052207.295 7052207.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	231 323 323 346
				MAF	SRÌ 🖉
Centred by BHO BST	Delancey Centerset Faucet • Same as 7052207 • With Red/Blue temperature indicator markings • Less drain	CEO	7052214.002	Polished Chrome	210
				MAF	SR Ø



DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Delancey Roman Tub Filler Trim Kit With Personal Shower • Brass construction • All personal showers feature 5' (152 cm) long hose • Metal lever handles • With personal shower	CEO	T052901.002 T052901.013 T052901.295 T052901.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	431 603 603 646
For use with Flash [®] roman tub filler rough-in valve f	R910		MAI	SR 🖉
Delancey Roman Tub Filler Trim Kit • Brass construction • Metal lever handles • Less personal shower	(DA)	T052900.002 T052900.013 T052900.295 T052900.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	308 431 431 461
For use with Flash roman tub filler rough-in valve R	900		MA	SR 🖉
 Flash Roman Tub Filler Rough-In Valve With Personal Shower Brass construction and washerless 1/4 turn ceramic disc valve cartridges 1/2" copper inlets Connections to spout can be made via flexible hoses (provided) or 1/2" copper sweat connections 14 gpm/52.9 L/min maximum flow rate at 40 psi 8" - 16" (203 - 406 mm) flexible installation Adjustable rough-in: 2-1/2" (64 mm) maximum deck thickness Includes hand shower rough-in 		R910	N/A	286
Flash Roman Tub Filler Rough-In Valve • Brass construction and washerless 1/4 turn ceramic disc valve cartridges • 1/2" copper inlets • Connections to spout can be made via flexible hoses (provided) or 1/2" copper sweat connections • 14 gpm/52.9 L/min maximum flow rate at 40 psi • 8" – 16" (203 – 406 mm) flexible installation • Adjustable rough-in: 2-1/2" (64 mm) maximum deck thickness		R900	N/A	163

American Standard

Bath/Shower Trim Kits and Valves

HOW TO ORDER	Choose desired trim kit.	Choose rough-in valve w desired connection.	=	Fully installed Bath/Sho	wer
	DESCRIPTION	Sk	KU #	COLOR/FINISH	LIST PRICE
	Delancey Bath/Shower Trim Kit • Showerhead with 2.5 gpm/9.4 L maximum flow • Water-saving 3-function shower • Shower arm and flange • Wall escutcheon • Metal lever handle • Metal slip-on diverter tub spout	/min Ti /min Ti	U052502.002 U052502.013 U052502.295 U052502.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	256 359 359 384
	For use with Flash shower rough-in	n valves		MAP	SR Ø
	Delancey Shower Only Trim Kit • Showerhead with 2.5 gpm/9.4 L maximum flow • Water-saving 3-function shower • Shower arm and flange • Wall escutcheon • Metal lever handle	ADA TI /min Ti Ti	U052501.002 U052501.013 U052501.295 U052501.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	220 309 309 331
	For use with Flash shower rough-in	n valves		MAP	SR Ø
	Delancey Valve Only Trim Kit • Wall escutcheon • Metal lever handle		U052500.002 U052500.013 U052500.295 U052500.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	179 251 251 270
	For use with Flash shower rough-in	n valves		MAP	SR Ø
	Delancey Bath/Shower Trim Kit • Showerhead with 1.8 gpm/6.8 L maximum flow • Water-saving 3-function shower • Shower arm and flange • Wall escutcheon • Metal lever handle • Metal slip-on diverter tub spout	CEO TI /min TI TI	U052508.002 U052508.013 U052508.295 U052508.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	256 359 359 384
	For use with Flash shower rough-in	n valves		MAP	SR Ø
	Delancey Shower Only Trim Kit • Showerhead with 1.8 gpm/6.8 L maximum flow • Water-saving 3-function shower • Shower arm and flange • Wall escutcheon • Metal lever handle	/min (ADA) TI	U052507.002 U052507.013 U052507.295 U052507.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	220 309 309 331
(G)	For use with Flash shower rough-in	n valves		MAP	SR Ø

American Standard

Bath/Shower Trim Kits and Valves

 DESCRIPTION	SKU #		LIST PRIC
 Flash[®] Shower Rough-In Valve With Universal Connections 1/2" Male NPT/Sweat inlets/outlets accept 1/2" copper, 1/2" iron pipe, PEX or CPVC adapters Brass valve body Flow rate: 5.1 gpm @ 45 psi* Back-to-back capability Includes test plug with stainless steel ring Cartridge ships with trim 	RU101 RU101SS	Screwdriver Stops	64 91
 For use with TU series pressure balance bath/shower trim kits			
Flash Shower Rough-In Valve With Stub-out Connections • 1/2" Stub-out inlets/outlets accept 1/2" press-connect fittings • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU102 RU102SS	Screwdriver Stops	64 91
Flash Shower Rough-In Valve With PEX Crimp Connections 1/2" PEX crimp inlets/Universal outlets (ASTM F1807) Brass valve body Flow rate: 5.1 gpm @ 45 psi* Back-to-back capability Includes test plug with stainless steel ring Cartridge ships with trim	RU107 RU107SS	Screwdriver Stops	64 91
 For use with TU series pressure balance bath/shower trim kits			
Flash Shower Rough-In Valve With PEX Crimp Elbow Connections • 1/2" PEX crimp elbow inlets/Universal outlets (ASTM F1807) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim	RU107E RU107ESS	Screwdriver Stops	84 111
For use with TU series pressure balance bath/shower trim kits			
Flash Shower Rough-In Valve With PEX Cold Expansion Connections • 1/2" PEX cold expansion inlets/Universal outlets (ASTM F1960) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU108 RU108SS	Screwdriver Stops	64 91
Flash Shower Rough-In Valve With PEX Cold Expansion Elbow Connections • 1/2" PEX cold expansion elbow inlets/Universal outlets (ASTM F1960) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU108E RU108ESS	Screwdriver Stops	84 111
Flash Shower Rough-In Valve With CPVC Connections • 1/2" CPVC inlets/Universal outlets • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim	RU109 RU109SS	Screwdriver Stops	84 111

* When combined with Double Ceramic pressure balance cartridge.

American Standard

Bath/Shower Trim Kits and Valves

DESCRIPTION		SKU #	COLOR/FINISH	LIST PRIC
Delancey 2-Handle Thermostatic Valve Trim Kit • Metal wall escutcheon • Metal handles • Less valve (must be purchased separately)	(Å)	* T052740.002 * T052740.013 * T052740.295 * T052740.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	231 323 323 346
For use with rough-in valves R520, R522, R522S, F	3523 and	R523S	MA	P (SR 🕖
 2-Handle Thermostatic Rough Valve With On/Off and Volume Control 1/2" (13 mm) NPT inlets/outlets 5.9 gpm/22.3 L/min at 40 psi Top handle controls On/Off and Volume 1 Function All Ceratherm[™] valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature changes Adjustable temperature selections Hot Limit Safety Stop set to a maximum of 112"F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T Requires separate diverter valve when used with more than one outlet 		* R520	N/A	358 SR
 2-Handle Thermostatic Rough Valve With Built-In 2-Way Diverter 1/2" (13 mm) NPT inlets/outlets 6.5 gpm/24.6 L/min at 40 psi Top handle controls On/Off, Volume and Diverter functions Diverts to 2 discrete functions All Ceratherm valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature changes Adjustable temperature selections Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T Requires twin ell for use with diverter tub spout 	CEO	* R522	N/A	325 [SR]
Same as Above • Diverts to 2 Discrete/1 Shared Function		* R522S	N/A	325
 2-Handle Thermostatic Rough Valve With Built-In 3-Way Diverter 1/2" (13 mm) NPT inlets/outlets 6.5 gpm/24.6 L/min at 40 psi Top handle controls On/Off, Volume and Diverter functions Diverts to 3 discrete functions All Ceratherm valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature changes Adjustable temperature selections Hot Limit Safety Stop is set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T Requires twin ell for use with diverter tub spout 	CEO	* R523	N/A	5n 2 352
Same as Above		* R523S	N/A	352

American Standard

Bath/Shower Trim Kits and Valves


	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
C.G	Delancey Diverter Valve Trim Kit With Lever Handle • Metal lever handle • Less valve (must be purchased separately)	(Å	T052430.002 T052430.013 T052430.295 T052430.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	103 144 144 154
Į.	For use with rough-in valves R422, R422S, R433 an	d R433S		MAP	SR Ø
	Delancey Diverter Valve Trim Kit With Cross Handle • Metal cross handle • Less valve (must be purchased separately)	(Å	T052432.002 T052432.013 T052432.295 T052432.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	103 144 144 154
	For use with rough-in valves R422, R422S, R433 an	d R433S		MAP	
	 2-Way In-Wall Diverter Rough-In Valve Controls water flow between 2 outlets (shower or sprays) 2 Discrete functions 	CEO	R422	N/A	205 Sr Ø
	Same as Above • Diverts to 2 Discrete/1 Shared function		R422S	NA	205 Sr Ø
	 3-Way In-Wall Diverter Rough-In Valve Controls water flow between 3 outlets (shower or sprays) 3 Discrete functions 	CEO	R433	NA	232
	Same as Above • Diverts to 3 Discrete/3 Shared functions		R433S	NA	232 Sr 🖉




Shower Systems

Delancey Thermostatic Bath/Shower System

Delancey Thermostatic Shower System

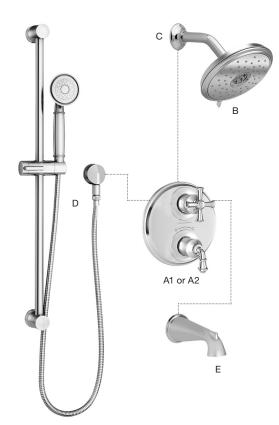

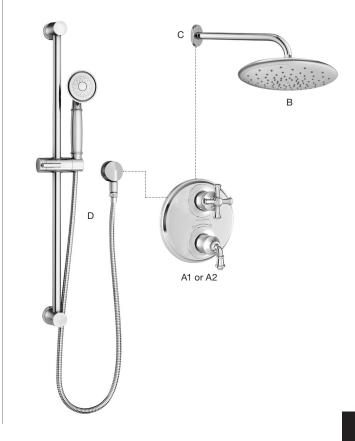

Delancey Thermostatic Bath/Shower System

				LIST PRICE	FOR SYSTEM
	DESCRIPTION	QTY	SKU #	002	295
Α	Delancey 2-Handle Thermostatic Valve Trim Kit	1	T052740	231	323
В	Spectra Fixed® Traditional Showerhead	1	9135073	98	121
С	Standard Shower Arm	1	1660240	25	33
D	Traditional Slide Bar Kit	1	1662607	384	538
Е	Delancey Tub Spout	1	8888107	87	122
equir	ed Components – Rough-In Valves (not shown)				
1	2-Handle Thermostatic Rough-In Valve With Built-In 3-Way Diverter - Non-Shared Function	1	R523	352	
OR	(Choose R523 or R523S)				

2-Handle Thermostatic Rough-In Valve With Built-In 3-Way Diverter - Shared Function

Delancey Thermostatic Shower System

2

				LIST PRICE	FOR SYSTEM
	DESCRIPTION	QTY	SKU #	002	295
А	Delancey 2-Handle Thermostatic Valve Trim Kit	1	T052740	231	323
В	Spectra Rain® Showerhead	1	9035001	175	219
С	12" Wall-Mount Right Angle Rain Showerhead Arm	1	1660194	89	134
D	Traditional Slide Bar Kit	1	1662607	384	538
Requir	ed Components – Rough-In Valves (not shown)				
1	2-Handle Thermostatic Rough-In Valve With Built-In 2-Way Diverter - Non-Shared Function	1	R522	32	25
OR	(Choose R522 or R522S)				
2	2-Handle Thermostatic Rough-In Valve With Built-In 2-Way Diverter - Shared Function	1	R522S	325	

Shower System Total

1

Bath/Shower System Total

R523S



List Price Guide 2020 377

1,204

352

1,177

1,489

1,539

Accessories

	DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
\$	Delancey 18" Towel Bar • Brass bar • All metal construction • Concealed mounting	7052018.002 7052018.013 7052018.295 7052018.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	67 93 93 100
			MAI	P SR Ø
	Delancey 24" Towel Bar • Brass bar • All metal construction • Concealed mounting	7052024.002 7052024.013 7052024.295 7052024.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	72 100 100 108
			MA	P 🖻 🖉
	Delancey Towel Ring • 7" (178 mm) diameter ring • All metal construction • Concealed mounting	7052190.002 7052190.013 7052190.295 7052190.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	41 57 57 62 (SR)
Cly	Delancey Double Robe Hook • All metal construction • Concealed mounting	7052210.002 7052210.013 7052210.295 7052210.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	31 43 43 46 9 SR Ø
	Delancey Toilet Paper Holder • All metal construction • Concealed mounting	7052230.002 7052230.013 7052230.295 7052230.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	56 79 79 85 9 (SR) Ø

American Standard





Elevate your bathroom with the stately beauty of the **Edgemere Collection**. This striking style enhances traditional, transitional, and contemporary settings beautifully.



American Standard

Bathroom Faucets

Sink





Widespread Faucet 7018801

Monoblock Faucet 7018101




Centerset Faucet 7018201

Bath



Roman Tub Filler T018901, T018900

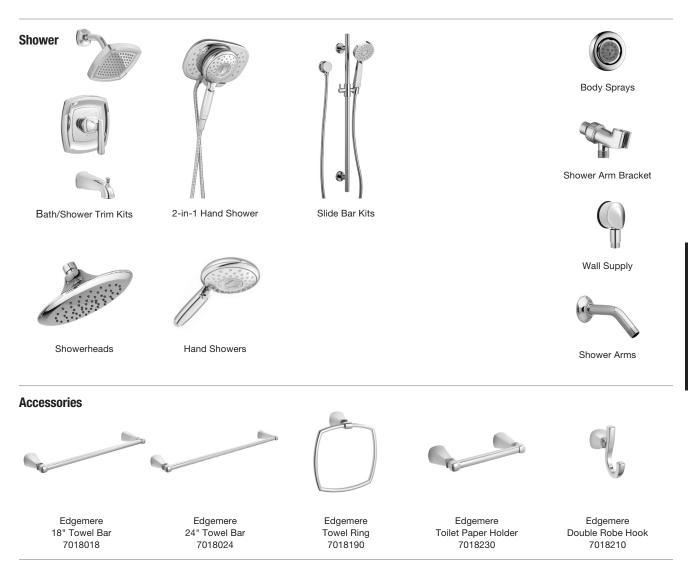



	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
	 Edgemere Widespread Faucet 1/4 turn ceramic disc valve cartridges Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Cast spout Cast brass valve bodies with flexible hose connections for 6" – 12" (152 – 305 mm) installation 24" (610 mm) braided flexible supply hose with 3/8" (10 mm) compression connectors Metal lever handles Metal Speed Connect[®] pop-up drain 	(Å) CEO	7018801.002 7018801.295 7018801.278	Polished Chrome Brushed Nickel Legacy Bronze	331 463 496
Lenie by Brito Ref	 Edgemere Monoblock Faucet All metal construction Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator 24" (610 mm) braided flexible supply hose with 3/8" (10 mm) compression connectors Adjustable Hot Limit Safety Stop Red/Blue and color-matched index buttons included Metal lever handle Metal Speed Connect pop-up drain 	ADA CEO	7018101.002 7018101.295 7018101.278	Polished Chrome Brushed Nickel Legacy Bronze	248 347 372
Centred by Bruco Rest	Edgemere Centerset Faucet • 1/4 turn ceramic disc valve cartridges • Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator • Cast brass body • Metal lever handles • Metal Speed Connect pop-up drain	(DA) CEO	7018201.002 7018201.295 7018201.278	Polished Chrome Brushed Nickel Legacy Bronze	220 309 331
	Escutcheon Plate • For use with 7018101 • Metal deck plate • 5-3/4" (147 mm) • Putty plate included		7018101P.002 7018101P.295 7018101P.278	Polished Chrome Brushed Nickel Legacy Bronze	40 55 59

American Standard

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Ĩ	Edgemere Roman Tub Filler Trim Kit With Personal Shower • Brass construction • All personal showers feature 5' (152 cm) long hose • Metal lever handles • With personal shower	CEO	T018901.002 T018901.295 T018901.278	Polished Chrome Brushed Nickel Legacy Bronze	607 849 909
	For use with Flash [®] roman tub filler rough-in valve F	R910		MAI) (SR) 🖉
	Edgemere Roman Tub Filler Trim Kit • Brass construction • Metal lever handles • Less personal shower	Â	T018900.002 T018900.295 T018900.278	Polished Chrome Brushed Nickel Legacy Bronze	441 617 661
	For use with Flash roman tub filler rough-in valve R	900		MAI	SR Ø
K	 Flash Roman Tub Filler Rough-In Valve With Personal Shower Brass construction and washerless 1/4 turn ceramic disc valve cartridges 1/2" copper inlets Connections to spout can be made via flexible hoses (provided) or 1/2" copper sweat connections 14 gpm/52.9 L/min maximum flow rate at 40 psi 8" – 16" (203 – 406 mm) flexible installation Adjustable rough-in: 2-1/2" (64 mm) maximum deck thickness Includes hand shower rough-in 		R910	N/A	286
ľ	 Flash Roman Tub Filler Rough-In Valve Brass construction and washerless 1/4 turn ceramic disc valve cartridges 1/2" copper inlets Connections to spout can be made via flexible hoses (provided) or 1/2" copper sweat connections 14 gpm/52.9 L/min maximum flow rate at 40 psi 8" – 16" (203 – 406 mm) flexible installation Adjustable rough-in: 2-1/2" (64 mm) maximum deck thickness 		R900	N/A	163



Bath/Shower Trim Kits and Valves

HOW TO Order	noose desired trim kit.		=	Fully installed Bath/S	hower LIST PRICE 230 312 331
	maximum flow • Shower arm and flange • Wall escutcheon • Metal lever handle • Metal slip-on diverter tub spout For use with Flash shower rough-in va	lves		[w	AP SR Ø
	Edgemere Shower Only Trim Kit • Includes Double Ceramic pressure balance cartridge • 5-3/4" (147 mm) showerhead, 2.5 gr maximum flow • Shower arm and flange • Wall escutcheon • Metal lever handle	om/9.5 L/min	TU018501.002 TU018501.295 TU018501.278	Polished Chrome Brushed Nickel Legacy Bronze	207 278 297
	For use with Flash shower rough-in va Edgemere Valve Only Trim Kit • Includes Double Ceramic pressure balance cartridge • Wall escutcheon • Metal lever handle For use with Flash shower rough-in va	ADA e	TU018500.002 TU018500.295 TU018500.278	Polished Chrome Brushed Nickel Legacy Bronze	183 246 261
Control of the second s	Edgemere Bath/Shower Trim Kit • Includes Double Ceramic pressure balance cartridge • Water-saving 5-3/4" (147 mm) show 1.8 gpm/6.8 L/min maximum flow • Shower arm and flange • Wall escutcheon • Metal lever handle • Metal slip-on diverter tub spout		TU018508.002 TU018508.295 TU018508.278	Polished Chrome Brushed Nickel Legacy Bronze	230 312 331
	For use with Flash shower rough-in va	lves		M	IAP SR Ø
Cestind by Kanno rest	Edgemere Shower Only Trim Kit Includes Double Ceramic pressure balance cartridge Water-saving 5-3/4" (147 mm) show 1.8 gpm/6.8 L/min maximum flow Shower arm and flange Wall escutcheon Metal lever handle For use with Flash shower rough-in va	CEO erhead,	TU018507.002 TU018507.295 TU018507.278	Polished Chrome Brushed Nickel Legacy Bronze	207 278 297

Bath/Shower Trim Kits and Valves

DESCRIPTION	SKU #		LIST PRI
Flash® Shower Rough-In Valve With Universal Connections • 1/2" Male NPT/Sweat inlets/outlets accept 1/2" copper, 1/2" iron pipe, PEX or CPVC adapters • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU101 RU101SS	Screwdriver Stops	64 91
Flash Shower Rough-In Valve With Stub-out Connections • 1/2" Stub-out inlets/outlets accept 1/2" press-connect fittings • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU102 RU102SS	Screwdriver Stops	64 91
Flash Shower Rough-In Valve With PEX Crimp Connections • 1/2" PEX crimp inlets/Universal outlets (ASTM F1807) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU107 RU107SS	Screwdriver Stops	64 91
Flash Shower Rough-In Valve With PEX Crimp Elbow Connections • 1/2" PEX crimp elbow inlets/Universal outlets (ASTM F1807) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU107E RU107ESS	Screwdriver Stops	84 111
Flash Shower Rough-In Valve With PEX Cold Expansion Connections • 1/2" PEX cold expansion inlets/Universal outlets (ASTM F1960) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU108 RU108SS	Screwdriver Stops	64 91
Flash Shower Rough-In Valve With PEX Cold Expansion Elbow Connections • 1/2" PEX cold expansion elbow inlets/Universal outlets (ASTM F1960) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU108E RU108ESS	Screwdriver Stops	84 111
Flash Shower Rough-In Valve With CPVC Connections • 1/2" CPVC inlets/Universal outlets • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU109 RU109SS	Screwdriver Stops	84 111

* When combined with Double Ceramic pressure balance cartridge.

American Standard

Accessories

	DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
	Edgemere 18" Towel Bar • Brass bar • All metal construction • Concealed mounting	7018018.002 7018018.295 7018018.278	Polished Chrome Brushed Nickel Legacy Bronze	60 85 91
	Edgemere 24" Towel Bar • Brass bar • All metal construction • Concealed mounting	7018024.002 7018024.295 7018024.278	Polished Chrome Brushed Nickel Legacy Bronze	67 92 99
Ŧ	Edgemere Towel Ring • 7" (178 mm) diameter ring • All metal construction • Concealed mounting	7018190.002 7018190.295 7018190.278	Polished Chrome Brushed Nickel Legacy Bronze	44 62 67
	Edgemere Double Robe Hook • All metal construction • Concealed mounting	7018210.002 7018210.295 7018210.278	Polished Chrome Brushed Nickel Legacy Bronze	33 46 49 Ø
	Edgemere Toilet Paper Holder • Pivoting arm • All metal construction • Concealed mounting	7018230.002 7018230.295 7018230.278	Polished Chrome Brushed Nickel Legacy Bronze	49 70 75

American Standard



American Standard

Inspired by the continuous movement of water, the **Fluent Collection** adds an easy elegance to your bathroom design. It's the perfect way to bring the beauty of nature indoors.



American Standard

Fluent[®]

Sink







Monoblock Faucet 7186101



Centerset Faucet 7186201







Roman Tub Filler Trim Kit T186901, T186900

Tub Spouts





Bath/Shower Trim Kits





Diverter Valve Trim Kit T186430



1660604 Showerhead



Hand Showers

Slide Bar Kits



Body Sprays



Shower Arm Bracket



Wall Supply



Shower Arms

Accessories





C Series 18" Towel Bar 8337018

C Series 24" Towel Bar 8337024

C Series Towel Ring

8337190



C Series Toilet Paper Holder 8337230

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Centre by KHO RT	 Fluent Widespread Faucet 1/4 turn washerless ceramic disc valve cartridges Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Cast brass spout Cast brass valve bodies with flexible hose connections for 6" – 12" (152 – 305 mm) installation Braided flexible supply hose with 3/8" (10 mm) compression connectors Metal lever handles Metal Speed Connect® pop-up drain 	(Â) Ceo	7186801.002 7186801.295 7186801.278	Polished Chrome Brushed Nickel Legacy Bronze	308 431 461
	Fluent Widespread Faucet • 1/4 turn washerless ceramic disc valve cartridges • Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator • Cast brass spout • Cast brass valve bodies with flexible hose connections for 6" – 12" (152 – 305 mm) installation • Braided flexible supply hose with 3/8" (10 mm) compression connectors • Metal lever handles with Red/Blue indicators	ADA CEO	7186811.002 7186811.295 7186811.278	Polished Chrome Brushed Nickel Legacy Bronze	313 439 469
Control of the second sec	 Fluent Monoblock Faucet 1/4 turn washerless ceramic disc valve cartridges Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator All metal construction Braided flexible supply hose with 3/8" (10 mm) compression connectors Adjustable Hot Limit Safety Stop Red/Blue and finish-matched index buttons included Metal lever handle Metal Speed Connect pop-up drain 	CEQ	7186101.002 7186101.295 7186101.278	Polished Chrome Brushed Nickel Legacy Bronze	227 318 340
	Escutcheon Plate • For use with 7186101		2000102P.002 2000102P.295 2000102P.278	Polished Chrome Brushed Nickel Legacy Bronze	44 62 67 \$R Ø
Control of the second sec	Fluent Centerset Faucet • Brass construction • 1/4 turn washerless ceramic disc valve cartridges • Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator • Cast brass spout • Metal lever handles • Metal Speed Connect pop-up drain	A) CEO	7186201.002 7186201.295 7186201.278	Polished Chrome Brushed Nickel Legacy Bronze	195 274 293

American Standard

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Contraction of the second seco	 Fluent Centerset Faucet Brass construction 1/4 turn washerless ceramic disc valve cartridges Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Cast brass spout Metal lever handles with Red/Blue indicators Metal Speed Connect[®] pop-up drain 	(Å) CEO	* 7186211.002 * 7186211.295 * 7186211.278	Polished Chrome Brushed Nickel Legacy Bronze	201 281 301
Centre by RMO RT	Fluent Centerset Faucet • Brass construction • 1/4 turn washerless ceramic disc valve cartridges • Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator • Cast brass spout • Metal lever handles • Non-metallic Speed Connect pop-up drain	ADA CEO	* 7186203.002 * 7186203.295	Polished Chrome Brushed Nickel	167 235

American Standard

DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Fluent Roman Tub Filler Trim Kit With Personal Shower • Brass construction • All personal showers feature 5' (152 cm) long hose • Metal lever handles • Personal shower with 1.8 gpm/6.8 L/min maximum flow	CEO	T186901.002 T186901.295 T186901.278	Polished Chrome Brushed Nickel Legacy Bronze	579 811 869
For use with Flash [®] roman tub filler rough-in valve F	R910		MA	P (SR) Ø
Fluent Roman Tub Filler Trim Kit • Brass construction • Metal lever handles • Less personal shower	Â	* T186900.002 T186900.295 * T186900.278	Polished Chrome Brushed Nickel Legacy Bronze	414 579 621
For use with Flash roman tub filler rough-in valve R	900		MA	P <u>S</u> R 🖉
 Flash Roman Tub Filler Rough-In Valve With Personal Shower Brass construction and washerless 1/4 turn ceramic disc valve cartridges 1/2" copper inlets Connections to spout can be made via flexible hoses (provided) or 1/2" copper sweat connections 14 gpm/52.9 L/min maximum flow rate at 40 psi 8" - 16" (203 - 406 mm) flexible installation Adjustable rough-in: 2-1/2" (64 mm) maximum deck thickness Includes hand shower rough-in 		R910	N/A	286
 Flash Roman Tub Filler Rough-In Valve Brass construction and washerless 1/4 turn ceramic disc valve cartridges 1/2" copper inlets Connections to spout can be made via flexible hoses (provided) or 1/2" copper sweat connections 14 gpm/52.9 L/min maximum flow rate at 40 psi 8" – 16" (203 – 406 mm) flexible installation Adjustable rough-in: 2-1/2" (64 mm) maximum deck thickness 		R900	N/A	163

American Standard

Bath/Shower Trim Kits and Valves

HOW TO ORDER	Choose desired trim kit.	Choose rough-in valve with desired connection.	Fully installed Bath/Shower
	Trim kit with cartridge F	Flash [®] Shower Rough-In Valve	COLOR/FINISH LIST PRIC
	Fluent Bath/Shower Trim Kit Includes Double Ceramic pressur balance cartridge 7" (178 mm) showerhead, 2.5 gpm/s maximum flow Shower arm and flange Brass wall escutcheon Metal lever handle and Metal slip-on diverter tub spout	TU186502 e T1U86502 TU186502 TU186502	2.002 Polished Chrome 238 2.295 Brushed Nickel 321
	For use with Flash shower rough-in va	lves	
	 Fluent Shower Only Trim Kit Includes Double Ceramic pressur balance cartridge 7" (178 mm) showerhead, 2.5 gpm/s maximum flow Shower arm and flange Brass wall escutcheon Metal lever handle 	* TU186501	.295 Brushed Nickel 289
	For use with Flash shower rough-in va	lives	
	Fluent Shower Only Trim Kit Includes Double Ceramic pressurbalance cartridge Shower arm and flange Brass wall escutcheon Metal lever handle 	re ADA * TU186501	XH.002 Polished Chrome 205
	For use with Flash shower rough-in va	lives	
	 Fluent Valve Only Trim Kit Includes Double Ceramic pressur balance cartridge Brass wall escutcheon Metal lever handle 	re ADA TU186500 TU186500 * TU186500	.295 Brushed Nickel 252
	For use with Flash shower rough-in va	lves	
	Fluent Bath/Shower Trim Kit Includes Double Ceramic pressur balance cartridge Water-saving 7" (178 mm) showerher 1.8 gpm/6.8 L/min maximum flow Shower arm and flange Brass wall escutcheon Metal lever handle	* TU186508	3.295 Brushed Nickel 321
	 Metal slip-on diverter tub spout For use with Flash shower rough-in va 	lives	
	Fluent Shower Only Trim Kit Includes Double Ceramic pressur balance cartridge Water-saving 7" (178 mm) showerher 1.8 gpm/6.8 L/min maximum flow Shower arm and flange Brass wall escutcheon	* TU186507	2295 Brushed Nickel 289
	 Metal lever handle 		

American Standard

Fluent

Bath/Shower Trim Kits and Valves

	DESCRIPTION	SKU #	I	LIST PR
	Flash [®] Shower Rough-In Valve	RU101		64
	With Universal Connections	RU101SS	Screwdriver Stops	91
	 1/2" Male NPT/Sweat inlets/outlets accept 1/2" copper, 1/2" iron pipe, PEX or CPVC adapters 			
	Brass valve body			
	• Flow rate: 5.1 gpm @ 45 psi*			
	 Back-to-back capability Includes test plug with stainless steel ring 			
	Cartridge ships with trim			
	For use with TU series pressure balance bath/shower trim kits			
m	Flash Shower Rough-In Valve	RU102		64
	With Stub-out Connections	RU102SS	Screwdriver Stops	91
a la la	 1/2" Stub-out inlets/outlets accept 1/2" press-connect fittings Brass valve body 			
MAG	 Flow rate: 5.1 gpm @ 45 psi* 			
	 Back-to-back capability 			
	 Includes test plug with stainless steel ring Cartridge ships with trim 			
	For use with TU series pressure balance bath/shower trim kits			
	Flash Shower Rough-In Valve	RU107		
	With PEX Crimp Connections	RU107SS	Screwdriver Stops	64 91
B _B	 1/2" PEX crimp inlets/Universal outlets (ASTM F1807) 			51
	Brass valve body			
	 Flow rate: 5.1 gpm @ 45 psi* Back-to-back capability 			
	 Includes test plug with stainless steel ring 			
	Cartridge ships with trim			
	For use with TU series pressure balance bath/shower trim kits			
	Flash Shower Rough-In Valve	RU107E		84
	With PEX Crimp Elbow Connections	RU107ESS	Screwdriver Stops	11
	 1/2" PEX crimp elbow inlets/Universal outlets (ASTM F1807) Brass valve body 			
-	 Flow rate: 5.1 gpm @ 45 psi* 			
	 Back-to-back capability Includes test plug with stainless steel ring 			
-	Cartridge ships with trim			
	For use with TU series pressure balance bath/shower trim kits			
	Flash Shower Rough-In Valve	RU108		64
	With PEX Cold Expansion Connections	RU108SS	Screwdriver Stops	91
	 1/2" PEX cold expansion inlets/Universal outlets (ASTM F1960) 			
	 Brass valve body Flow rate: 5.1 gpm @ 45 psi* 			
26	 Back-to-back capability 			
	 Includes test plug with stainless steel ring 			
	 Includes test plug with stainless steel ring Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits 	RUIOSE		
	 Includes test plug with stainless steel ring Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits Flash Shower Rough-In Valve	RU108E RU108ESS	Screwdriver Stops	
	 Includes test plug with stainless steel ring Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits 		Screwdriver Stops	
	 Includes test plug with stainless steel ring Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits Flash Shower Rough-In Valve With PEX Cold Expansion Elbow Connections 1/2" PEX cold expansion elbow inlets/Universal outlets (ASTM F1960) Brass valve body 		Screwdriver Stops	
	 Includes test plug with stainless steel ring Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits Flash Shower Rough-In Valve With PEX Cold Expansion Elbow Connections 1/2" PEX cold expansion elbow inlets/Universal outlets (ASTM F1960) Brass valve body Flow rate: 5.1 gpm @ 45 psi* 		Screwdriver Stops	
	 Includes test plug with stainless steel ring Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits Flash Shower Rough-In Valve With PEX Cold Expansion Elbow Connections 1/2" PEX cold expansion elbow inlets/Universal outlets (ASTM F1960) Brass valve body Flow rate: 5.1 gpm @ 45 psi* Back-to-back capability Includes test plug with stainless steel ring 		Screwdriver Stops	
	 Includes test plug with stainless steel ring Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits Flash Shower Rough-In Valve With PEX Cold Expansion Elbow Connections 1/2" PEX cold expansion elbow inlets/Universal outlets (ASTM F1960) Brass valve body Flow rate: 5.1 gpm @ 45 psi* Back-to-back capability 		Screwdriver Stops	
	 Includes test plug with stainless steel ring Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits Flash Shower Rough-In Valve With PEX Cold Expansion Elbow Connections 1/2" PEX cold expansion elbow inlets/Universal outlets (ASTM F1960) Brass valve body Flow rate: 5.1 gpm @ 45 psi* Back-to-back capability Includes test plug with stainless steel ring 		Screwdriver Stops	
	 Includes test plug with stainless steel ring Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits Flash Shower Rough-In Valve With PEX Cold Expansion Elbow Connections 1/2" PEX cold expansion elbow inlets/Universal outlets (ASTM F1960) Brass valve body Flow rate: 5.1 gpm @ 45 psi* Back-to-back capability Includes test plug with stainless steel ring Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits Flash Shower Rough-In Valve	RU108ESS RU109	·	84
	 Includes test plug with stainless steel ring Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits Flash Shower Rough-In Valve With PEX Cold Expansion Elbow Connections 1/2" PEX cold expansion elbow inlets/Universal outlets (ASTM F1960) Brass valve body Flow rate: 5.1 gpm @ 45 psi* Back-to-back capability Includes test plug with stainless steel ring Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits Flash Shower Rough-In Valve With CPVC Connections	RU108ESS	Screwdriver Stops	84
	 Includes test plug with stainless steel ring Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits Flash Shower Rough-In Valve With PEX Cold Expansion Elbow Connections 1/2" PEX cold expansion elbow inlets/Universal outlets (ASTM F1960) Brass valve body Flow rate: 5.1 gpm @ 45 psi* Back-to-back capability Includes test plug with stainless steel ring Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits Flash Shower Rough-In Valve With CPVC Connections 1/2" CPVC inlets/Universal outlets 	RU108ESS RU109	·	84
	 Includes test plug with stainless steel ring Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits Flash Shower Rough-In Valve With PEX Cold Expansion Elbow Connections 1/2" PEX cold expansion elbow inlets/Universal outlets (ASTM F1960) Brass valve body Flow rate: 5.1 gpm @ 45 psi* Back-to-back capability Includes test plug with stainless steel ring Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits Flash Shower Rough-In Valve With CPVC Connections 1/2" CPVC inlets/Universal outlets Brass valve body Flow rate: 5.1 gpm @ 45 psi* 	RU108ESS RU109	·	84
	 Includes test plug with stainless steel ring Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits Flash Shower Rough-In Valve With PEX Cold Expansion Elbow Connections 1/2" PEX cold expansion elbow inlets/Universal outlets (ASTM F1960) Brass valve body Flow rate: 5.1 gpm @ 45 psi* Back-to-back capability Includes test plug with stainless steel ring Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits Flash Shower Rough-In Valve With CPVC Connections 1/2" CPVC inlets/Universal outlets Brass valve body Flow rate: 5.1 gpm @ 45 psi* Back-to-back capability Back-to-back capability 	RU108ESS RU109	·	84
	 Includes test plug with stainless steel ring Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits Flash Shower Rough-In Valve With PEX Cold Expansion Elbow Connections 1/2" PEX cold expansion elbow inlets/Universal outlets (ASTM F1960) Brass valve body Flow rate: 5.1 gpm @ 45 psi* Back-to-back capability Includes test plug with stainless steel ring Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits Flash Shower Rough-In Valve With CPVC Connections 1/2" CPVC inlets/Universal outlets Brass valve body Flow rate: 5.1 gpm @ 45 psi* 	RU108ESS RU109	·	84 111 84 111

* When combined with Double Ceramic pressure balance cartridge.

Fluent

American Standard

Fluent®

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
6	Fluent Diverter Valve Trim Kit • Metal lever handle • Less valve (must be purchased separately) • Trim kit for valve bodies R422, R422S, R423 and R423S	Â	T186430.002 T186430.295 * T186430.278	Polished Chrome Brushed Nickel Legacy Bronze	98 137 148
	For use with rough-in valves R422, R422S, R43	3 and R433S	;	MA	P SR Ø
	2-Way In-Wall Diverter Rough-In Valve • Controls water flow between 2 outlets	CEO	R422	N/A	205
	(shower or sprays) 2 Discrete functions 				SR Ø
	Same as Above		R422S	NA	205
	Diverts to 2 Discrete/1 Shared function				. SR 🖉
	3-Way In-Wall Diverter Rough-In Valve	CEQ	R433	NA	232
	 Controls water flow between 3 outlets (shower or sprays) 3 Discrete functions 				SR 🖉
	Same as Above		R433S	NA	232
<u> </u>	Diverts to 3 Discrete/3 Shared functions				SR Ø

American Standard

Fluent®

Accessories

	DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
	C Series 18" Towel Bar • Brass bar	8337018.002 8337018.013 8337018.295	Polished Chrome Polished Nickel Brushed Nickel	58 82 82
	All metal constructionConcealed mounting	8337018.278	Legacy Bronze	88 🖗 🗊 🖉
	C Series 24" Towel Bar	8337024.002 8337024.013	Polished Chrome Polished Nickel	62 86
	Brass barAll metal construction	8337024.295 8337024.278	Brushed Nickel Legacy Bronze	86 92
	Concealed mounting		MA	P <u>SR</u> 🖉
S	C Series Towel Ring	8337190.002 8337190.013 8337190.295	Polished Chrome Polished Nickel Brushed Nickel	36 50 50
	7" (178 mm) diameter ringAll metal constructionConcealed mounting	8337190.278	Legacy Bronze	54
			MA	P <u>S</u> R 🖉
	C Series	8337210.002	Polished Chrome	27
	Double Robe HookAll metal constructionConcealed mounting	8337210.013 8337210.295 8337210.278	Polished Nickel Brushed Nickel Legacy Bronze	38 38 38
			MA	P 🕅 🖉
	C Series	8337230.002	Polished Chrome	47
	Toilet Paper Holder All metal construction Concealed mounting 	8337230.013 8337230.295 8337230.278	Polished Nickel Brushed Nickel Legacy Bronze	67 67 72
			MA	P SR Ø

American Standard



American Standard

The elegant design of the **Patience Collection** is highlighted by vintage-inspired, coin-edge detailing that adds a touch of understated romance to your bathroom.



American Standard

Bathroom Faucets

Sink





Widespread Faucet 7106801 Monoblock Faucet 7106101

Vessel Faucet 7106152

Bath





Roman Tub Filler Trim Kit T106900, T106901 Tub Spouts





A





C Series 18" Towel Bar 8337018 C Series 24" Towel Bar 8337024 C Series Towel Ring 8337190 C Series Toilet Paper Holder 8337230 5,

C Series Double Robe Hook 8337210



Sink and Bath Faucets

		DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
	Certified by	Patience Widespread Faucet	ADA	7106801.002 7106801.013	Polished Chrome Polished Nickel	369 517
	APMO R&T	 Brass construction and washerless ceramic disc valve cartridges Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Valve bodies with integrated flexible hose connections for 6" – 12" (152 – 305 mm) installation Braided flexible supply hoses with 3/8" (10 mm) compression connectors 	CEO	7106801.295 7106801.278	Brushed Nickel Legacy Bronze	517 555
9		 Metal lever handles Metal Speed Connect[®] pop-up drain 			МАР) 🔝 🖉
	ANT CONTRACTOR	Patience	6	7106101.002	Polished Chrome	324
6	Certified by	Monoblock Faucet	ADA	7106101.013	Polished Nickel	454
	NPMO RÉT	 Brass construction and washerless ceramic disc valve cartridges Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Braided flexible hoses with 3/8" (10 mm) compression connectors Metal lever handle 	CEO	7106101.295 7106101.278	Brushed Nickel Legacy Bronze	454 486
		Metal Speed Connect pop-up drain			MAP	SR Ø
C		Patience	ÂDÂ	7106152.002	Polished Chrome	399
	Certified by APMO R&T	Single Control Vessel Faucet Brass construction and washerless ceramic		7106152.013 7106152.295	Polished Nickel Brushed Nickel	559 559
		disc valve cartridges • Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator • Braided flexible hoses with 3/8" (10 mm) compression connectors • Red/Blue index buttons included • Metal lever handle	CEO	7106152.278	Legacy Bronze	599
		Grid drain			MAP	SR Ø
		Escutcheon Plate		2064101P.002	Polished Chrome	40
		• For use with 7106101		2064101P.013	Polished Nickel	56
				2064101P.295	Brushed Nickel	56
				206/1010 279	Legacy Propzo	60
				2064101P.278	Legacy Bronze	60



Sink and Bath Faucets

Patience

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
1 RP	Patience Roman Tub Filler Trim Kit With Personal Shower • Brass construction • All personal showers feature 5' (152 cm) long hose • Metal lever handles • Personal shower with 1.8 gpm/6.8 L/min maximum flow	CEO	T106901.002 T106901.013 T106901.295 T106901.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	661 926 926 992
	For use with Flash [®] roman tub filler rough-in valve	R910		MAI	SRÌ 🖉
	Patience Roman Tub Filler Trim Kit Less Personal Shower • Brass construction • All personal showers feature 5' (152 cm) long hose • Metal lever handles • Personal shower with 1.8 gpm/6.8 L/min maximum flow • Less personal shower	ξÂ)	T106900.002 T106900.013 T106900.295 T106900.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	496 695 695 744
Ð	For use with Flash roman tub filler rough-in valve F	R900		MAI	SR 🖉
	 Flash Roman Tub Filler Rough-in Valve With Personal Shower Brass construction and washerless 1/4 turn ceramic disc valve cartridges 1/2" copper inlets Connections to spout can be made via flexible hoses (provided) or 1/2" copper sweat connections 14 gpm/52.9 L/min maximum flow rate at 40 psi 8" – 16" (203 – 406 mm) flexible installation Adjustable rough-in: 2-1/2" (64 mm) maximum deck thickness Includes hand shower rough-in 	i	R910	N/A	286
	 Flash Roman Tub Filler Rough-In Valve Brass construction and washerless 1/4 turn ceramic disc valve cartridges 1/2" copper inlets Connections to spout can be made via flexible hoses (provided) or 1/2" copper sweat connections 14 gpm/52.9 L/min maximum flow rate at 40 psi 8" – 16" (203 – 406 mm) flexible installation Adjustable rough-in: 2-1/2" (64 mm) maximum deck thickness 	i	R900	N/A	163

Patience[®]

HOW TO Order	Choose desired trim kit.	Choose rough-in valve with desired connection.	Fully installed Bath/Show	wer
	Trim kit with cartridge	Flash [®] Shower Rough-In Valve	Si	
	DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
	 Patience Bath/Shower Trim Kit Includes Double Ceramic pressubalance cartridge 5" (127 mm) 3-function showerhea 2.5 gpm/9.5 L/min maximum flow Shower arm and flange Brass wall escutcheon Metal lever handle Slip-on diverter tub spout 	TU106502.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	344 472 472 503
	For use with Flash shower rough-in v	alves	MAP	SR Ø
	 Patience Shower Only Trim Kit Includes Double Ceramic pressubalance cartridge 5" (127 mm) 3-function showerhea 2.5 gpm/9.5 L/min maximum flow Shower arm and flange Brass wall escutcheon Metal lever handle 	TU106501.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	293 401 401 427
	For use with Flash shower rough-in v	alves	MAP	SR Ø
	Patience Valve Only Trim Kit • Includes Double Ceramic pressu balance cartridge • Brass wall escutcheon • Metal lever handle	ADA TU106500.002 TU106500.013 TU106500.295 TU106500.278	Polished Chrome Polished Nickel Polished Nickel Legacy Bronze	204 275 275 293
	For use with Flash shower rough-in v	alves		
	 Patience Bath/Shower Trim Kit Includes Double Ceramic pressubalance cartridge Water-saving 5" (127 mm) 3-function shower head, 1.75 gpm/6.6 L/min r Shower arm and flange Brass wall escutcheon Metal lever handle Slip-on diverter tub spout 	TU106508.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	344 472 472 503
	For use with Flash shower rough-in v	alves	MAP	SR Ø
	 Patience Shower Only Trim Kit Includes Double Ceramic pressurbalance cartridge Water-saving 5" (127 mm) 3-functionshowerhead, 1.75 gpm/6.6 L/min r Shower arm and flange Metal wall escutcheon Metal lever handle 	CEO TU106507.278	Polished Chrome Polished Nickel Polished Nickel Legacy Bronze	293 401 401 427
	For use with Flash shower rough-in v	alves	MAP	SR Ø



Bath/Shower Trim Kits and Valves

Patience[®]

attorioo				- aire
	DESCRIPTION	SKU #		LIST PRIC
	Flash [®] Shower Rough-In Valve With Universal Connections • 1/2" Male NPT/Sweat inlets/outlets accept 1/2" copper, 1/2" iron pipe, PEX or CPVC adapters • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU101 RU101SS	S Screwdriver Stops	64 91
	Flash Shower Rough-In Valve With Stub-out Connections • 1/2" Stub-out inlets/outlets accept 1/2" press-connect fittings • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU102 RU102SS	S Screwdriver Stops	64 91
	Flash Shower Rough-In Valve With PEX Crimp Connections • 1/2" PEX crimp inlets/Universal outlets (ASTM F1807) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU107 RU107S5	S Screwdriver Stops	64 91
	Flash Shower Rough-In Valve With PEX Crimp Elbow Connections • 1/2" PEX crimp elbow inlets/Universal outlets (ASTM F1807) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU107E RU107Es	SS Screwdriver Stops	84 5 111
	Flash Shower Rough-In Valve With PEX Cold Expansion Connections • 1/2" PEX cold expansion inlets/Universal outlets (ASTM F1960) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU108 RU108S5	S Screwdriver Stops	64 91
	Flash Shower Rough-In Valve With PEX Cold Expansion Elbow Connections • 1/2" PEX cold expansion elbow inlets/Universal outlets (ASTM F19 • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU108E RU108ES	SS Screwdriver Stops	84 5 111
a .	Flash Shower Rough-In Valve With CPVC Connections • 1/2" CPVC inlets/Universal outlets	RU109 RU109SS	S Screwdriver Stops	84 5 111

 $\star\,$ When combined with Double Ceramic pressure balance cartridge.

American Standard

Patience[®]

Bath/Shower Trim Kits and Valves

		Datil/ Shower		varvos
DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
 Patience 2-Handle Thermostatic Valve Trim Kit Brass wall escutcheon Metal handles Less valve (must be purchased separately) 	ADA	* T106740.002 * T106740.013 * T106740.295 * T106740.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	238 333 333 357
For use with rough-in valves R520, R522, R522S, R5	523 and	R523S	MAP	SR Ø
 2-Handle Thermostatic Rough-In Valve With On/Off And Volume Control 1/2" (13 mm) NPT inlets/outlets 5.9 gpm/22.3 L/min at 40 psi Top handle controls On/Off and Volume 1 Function All Ceratherm[™] valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature selections Adjustable temperature selections Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T Requires separate diverter valve when used with more than one outlet 		* R520	N/A	358 (SR)
 2-Handle Thermostatic Rough-In Valve With Built-In 2-Way Diverter 1/2" (13 mm) NPT inlets/outlets 6.5 gpm/24.6 L/min at 40 psi Top handle controls On/Off, Volume and Diverter functions Diverts to 2 discrete functions All Ceratherm valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature changes Adjustable temperature selections Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T Requires twin ell for use with diverter tub spout 	CEO	* R522	N/A	325 SR 22
Same as Above • Diverts to 2 Discrete/1 Shared Function		* R522S	N/A	325 Sr 🖉
 2-Handle Thermostatic Rough-In Valve With Built-In 3-Way Diverter 1/2" (13 mm) NPT inlets/outlets 6.5 gpm/24.6 L/min at 40 psi Top handle controls On/Off, Volume and Diverter functions Diverter to 3 discrete functions All Ceratherm valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature changes Adjustable temperature selections Hot Limit Safety Stop is set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T Requires twin ell for use with diverter tub spout 	CEO	* R523	N/A	352 (SR)
Same as Above • Diverts to 3 Discrete/2 Shared Functions		* R523S	N/A	352

Patience




	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
(CA)	Patience Diverter Valve Trim Kit • Metal lever handle • Less valve (must be purchased separately)	ÂDĂ	* T106430.002 * T106430.013 * T106430.295 * T106430.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	105 147 147 158
	 Less valve (must be purchased separately) For use with rough-in valves R422, R422S, R433 	3, and R433			
	2-Way In-Wall Diverter Rough-In Valve		R422	N/A	205
	 Controls water flow between 2 outlets (shower or sprays) 2 Discrete functions 	CEO			SR Ø
	Same as Above Diverts to 2 Discrete/1 Shared function		R422S	NA	205
					SR Ø
	3-Way In-Wall Diverter Rough-In Valve	CEO	R433	NA	232
	 Controls water flow between 3 outlets (shower or sprays) 3 Discrete functions 				
	Same as Above		R433S	NA	232
	Diverts to 3 Discrete/3 Shared functions				SR Ø


American Standard

Patience[®]

Shower Systems

Patience

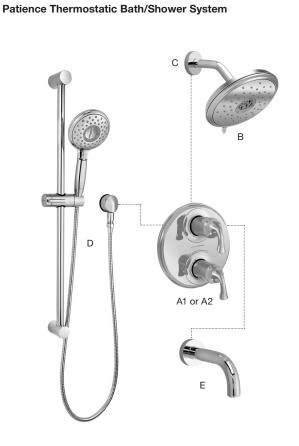

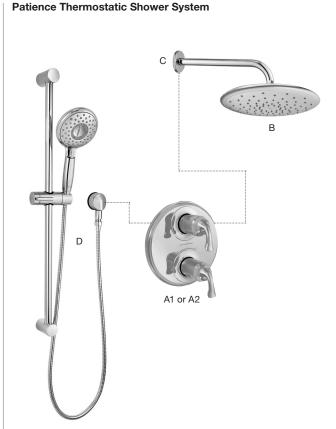

Patience Thermostatic Bath/Shower System

				LIST PRICE	FOR SYSTEN
	DESCRIPTION	QTY	SKU #	002	295
А	Patience 2-Handle Thermostatic Valve Trim Kit	1	T106740	238	333
в	Spectra Fixed® Traditional Showerhead	1	9135073	98	121
С	Modern Shower Arm	1	1660241	26	36
D	Spectra Handheld® Slide Bar Kit	1	1660775	219	296
E	Serin® Tub Spout	1	8888421	118	165
equir	ed Components (not shown)				
1	2-Handle Thermostatic Rough-In Valve With Built-In 3-Way Diverter - Non-Shared Function	1	R523	3	52
OR	(Choose R523 or R523S)				
2	2-Handle Thermostatic Rough-In Valve With Built-In 3-Way Diverter - Shared Function	1	R523S	3	52
	Bath/S	hower 9	System Total	1,051	1,303
atier	ce Thermostatic Shower System				
				LIST PRICE	FOR SYSTEM
	DESCRIPTION	QTY	SKU #	002	295
A	Patience 2-Handle Thermostatic Valve Trim Kit	1	T106740	238	333
в	Spectra Rain [®] Showerhead	1	9035001	175	219
P					

 Required Components (not shown)

 1
 2-Handle Thermostatic Rough-In Valve With Built-In 2-Way Diverter – Non-Shared Function
 1
 R522
 325

 0R
 (Choose R522 or R522S)
 2
 2-Handle Thermostatic Rough-In Valve With Built-In 2-Way Diverter – Shared Function
 1
 R522
 325

Shower System Total

1660775

1

296

219

American Standard

Spectra Handheld Slide Bar Kit

D

^{1,046 1,307}

Accessories

Patience

	DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
	C Series 18" Towel Bar • Brass bar • All metal construction • Concealed mounting	8337018.002 8337018.013 8337018.295 8337018.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	58 82 82 88
			MAP	SR 🖉
	C Series 24" Towel Bar • Brass bar • All metal construction • Concealed mounting	8337024.002 8337024.013 8337024.295 8337024.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	62 86 86 92
V			МАР) 🗊 🖉
	C Series Towel Ring • 7" (178 mm) diameter ring • All metal construction • Concealed mounting	8337190.002 8337190.013 8337190.295 8337190.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	36 50 50 54
			MAP) 🔝 🖉
	C Series Double Robe Hook • All metal construction • Concealed mounting	8337210.002 8337210.013 8337210.295 8337210.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	27 38 38 38
			МАР	SR Ø
	C Series Toilet Paper Holder • All metal construction • Concealed mounting	8337230.002 8337230.013 8337230.295 8337230.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	47 67 67 72

American Standard


Reminiscent of the Colonial era, the **Portsmouth Collection** combines old world charm, superior engineering, and modern functionality for today's traditional bathroom.



American Standard

Portsmouth[®]

Bathroom Faucets

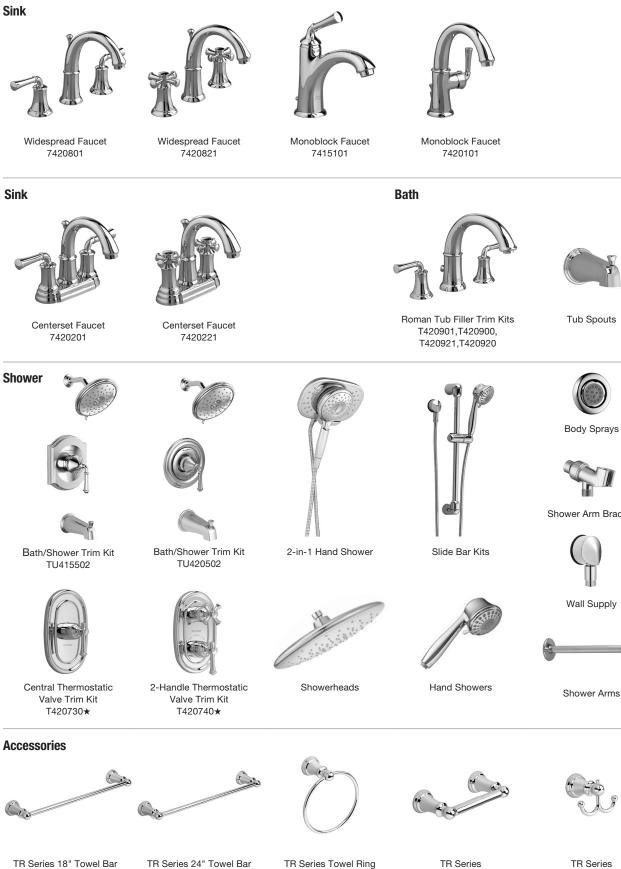



Shower Arm Bracket



8334190

8334024

Toilet Paper Holder 8334230

Double Robe Hook 8334210



8334018

Portsmouth

Sink and Bath Faucets

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
	Portsmouth Widespread Faucet Brass construction Washerless ceramic disc valve cartridges Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Cast brass crescent spout Metal lever handles	Â) Ceo	* 7420801.002 * 7420801.295	Polished Chrome Brushed Nickel	321 449
	 Metal Speed Connect[®] pop-up drain 			MAI	BR Ø
	Portsmouth Widespread Faucet Brass construction Washerless ceramic disc valve cartridges		* 7420821.002 * 7420821.295	Polished Chrome Brushed Nickel	321 449
× IA	 Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Cast brass crescent spout Metal cross handles 				
	Metal Speed Connect pop-up drain			MAI	P∫ (SRÌ ⊉
	Portsmouth Widespread Faucet	ÂDĂ	★ 7415801.002 ★ 7415801.295	Polished Chrome Brushed Nickel	331 463
ATTOR DE CARACTERISTO	Washerless ceramic disc valve cartridges Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Cast brass spout	CEO			
	Metal lever handlesMetal Speed Connect pop-up drain			MAI) (SR) 🖉
	Portsmouth Widespread Faucet	(Å	* 7415821.002 * 7415821.295	Polished Chrome Brushed Nickel	321 449
	 Brass construction Washerless ceramic disc valve cartridges Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Cast brass spout 	CEO			
	Metal cross handlesMetal Speed Connect pop-up drain			MAI	P <u>SR</u> 🖉
	Portsmouth Monoblock Faucet	ADA	★ 7420101.002 ★ 7420101.295	Polished Chrome Brushed Nickel	274 382
Carting Methods	by	CEO			
	Metal Speed Connect pop-up drain			MAI) (SR) 🖉
	Portsmouth Monoblock Faucet	ÂDA	★ 7415101.002 ★ 7415101.295	Polished Chrome Brushed Nickel	236 331
Curring HP100 B	 Brass construction Washerless ceramic disc valve cartridge Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Cast brass spout Braided flexible hoses with 3/8" (10 mm) compression connectors 	CEO			
	Metal lever handleMetal Speed Connect pop-up drain			MAR	



Sink and Bath Faucets

	DESCRIPTION	SI	KU #	COLOR/FINISH	LIST PRICE
	Escutcheon PlateFor use with 7420101 and 7415101		420101P.002 420101P.295	Polished Chrome Brushed Nickel	40 55
	Portsmouth Centerset Faucet	ÁDÀ	420201.002 420201.295	Polished Chrome Brushed Nickel	222 312
	 Brass construction Washerless ceramic disc valve cartridges Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Cast brass crescent spout Metal lever handles Metal lever handles 	CEO			
	 Metal Speed Connect[®] pop-up drain 			A	MAP SR Ø
	Portsmouth Centerset Faucet	ÁDÀ	420221.002 420221.295	Polished Chrome Brushed Nickel	222 312
Certified by IAPMO R8.T	Brass constructionWasherless ceramic disc valve cartridges	CEO			
SEL CROUD	Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator				
and a start	 Cast brass crescent spout Metal cross handles Metal Speed Connect pop-up drain 				
ST.					MAP SR 🖉
	Portsmouth Centerset Faucet		415201.002 415201.295	Polished Chrome Brushed Nickel	216 302
Certified by Brito Ret	 Brass construction Washerless ceramic disc valve cartridges Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Cast brass spout Metal lever handles 	CEO			
	Metal Speed Connect pop-up drain			(1	AAP SR Ø
	Portsmouth Centerset Faucet		415221.002 415221.295	Polished Chrome Brushed Nickel	216 302
Confinite by IAPMO R&T	Brass construction Washerless ceramic disc valve cartridges	CEO	TIVEE 1.200	Brushed Mickel	502
	 Washeriess berafile disc valve califidges Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Cast brass spout Metal cross handles 				
	 Metal Cross handles Metal Speed Connect pop-up drain 			ſ.	
•				(1	<u>SK</u>



Sink and Bath Faucets

DESCRIPTION		SKU #	COLOR/FINISH	LIST PRIC
Portsmouth Roman Tub Filler Trim Kit With Personal Shower • Brass construction • All personal showers feature 5' (152 cm) long hose • Metal lever handles • Personal shower with 1.8 gpm/6.8 L/min	CEO	* T420901.002 * T420901.295	Polished Chrome Brushed Nickel	579 811
maximum flow For use with Flash® roman tub filler rough-in valve F	8910		MA	P 🗊 🖉
Portsmouth Roman Tub Filler Trim Kit	ADA	★ T420900.002 ★ T420900.295	Polished Chrome Brushed Nickel	414 579
Brass constructionMetal lever cross handlesLess personal shower				
For use with Flash roman tub filler rough-in valve R	900		MA	P <u>S</u> R 🖉
Portsmouth Roman Tub Filler Trim Kit With Personal Shower • Brass construction	CEO	★ T420921.002 ★ T420921.295	Polished Chrome Brushed Nickel	579 811
 All personal showers feature 5' (152 cm) long hose Metal lever cross handles Personal shower with 1.8 gpm/6.8 L/min maximum flow 				
For use with Flash roman tub filler rough-in valve R	910		MA	P SR Ø
Portsmouth Roman Tub Filler Trim Kit • Brass construction • Metal lever cross handles • Less personal shower	Â	* T420920.002 * T420920.295	Polished Chrome Brushed Nickel	414 579
For use with Flash roman tub filler rough-in valve R	900		MA	P SR Ø
 Flash Roman Tub Filler Rough-In Valve With Personal Shower Brass construction and washerless 1/4 turn ceramic disc valve cartridges 1/2" copper inlets Connections to spout can be made via flexible hoses (provided) or 1/2" copper sweat connections 14 gpm/52.9 L/min maximum flow rate at 40 psi 8" - 16" (203 - 406 mm) flexible installation Adjustable rough-in: 2-1/2" (64 mm) maximum deck thickness Includes hand shower rough-in 		R910	N/A	286
 Flash Brass construction and washerless 1/4 turn ceramic disc valve cartridges 1/2" copper inlets Connections to spout can be made via flexible hoses (provided) or 1/2" copper sweat connections 14 gpm/52.9 L/min maximum flow rate at 40 psi 8" - 16" (203 - 406 mm) flexible installation Adjustable rough-in: 2-1/2" (64 mm) maximum deck thickness 		R900	N/A	163

412 List Price Guide 2020



HOW TO ORDER		rough-in valve with ed connection.	Fully installed Bath/Shower
	DESCRIPTION	SKU #	COLOR/FINISH LIST P
	 Portsmouth Bath/Shower Trim Kit Includes Double Ceramic pressure balance cartridge Water-saving 7-1/4" (184 mm) Spectra Fixed[®] Traditional showerhead, 1.8 gpm/6.8 L/min Shower arm and flange Wall escutcheon Metal lever handle Metal slip-on diverter tub spout 	* TU415502.002 CEO * TU415502.295	Polished Chrome 19 Brushed Nickel 26
	For use with Flash shower rough-in valves		
	Portsmouth Shower Only Trim Kit Includes Double Ceramic pressure balance cartridge Water-saving 7-1/4" (184 mm) Spectra Fixed Traditional showerhead, 1.8 gpm/6.8 L/min Shower arm and flange Wall escutcheon Metal lever handle 	ADA * TU415501.002 * TU415501.295 CEO	Polished Chrome 18 Brushed Nickel 24
	For use with Flash shower rough-in valves		
	 Portsmouth Valve Only Trim Kit Includes Double Ceramic pressure balance cartridge Wall escutcheon Metal lever handle 	* TU415500.002 ADA * TU415500.295	Polished Chrome 14 Brushed Nickel 19
	For use with Flash shower rough-in valves		
	Portsmouth Bath/Shower Trim Kit Includes Double Ceramic pressure balance cartridge Water-saving 7-1/4" (184 mm) Spectra Fixed Traditional showerhead, 1.8 gpm/6.8 L/min Shower arm and flange Metal wall escutcheon Metal lever handle Metal slip-on diverter tub spout	* TU420502.002 CEO * TU420502.295	Polished Chrome 20 Brushed Nickel 27
	For use with Flash shower rough-in valves		
	Portsmouth Shower Only Trim Kit Includes Double Ceramic pressure balance cartridge Water-saving 7-1/4" (184 mm) Spectra Fixed Traditional showerhead, 1.8 gpm/6.8 L/min Shower arm and flange Matal wall exercises	ADA CEO * TU420501.002 * TU420501.295	Polished Chrome 18 Brushed Nickel 24
	 Metal wall escutcheon Metal lever handle For use with Flash shower rough-in valves 		MAP SR SR
	Portsmouth Valve Only Trim Kit Includes Double Ceramic pressure balance cartridge Metal wall escutcheon Metal lever handle 	* TU420500.002 ADA * TU420500.295	Polished Chrome 14 Brushed Nickel 19
	For use with Flash shower rough-in valves		

Portsmouth

Bath/Shower Trim Kits and Valves

	DESCRIPTION	SKU #		LIST PR
	Flash [®] Shower Rough-In Valve With Universal Connections • 1/2" Male NPT/Sweat inlets/outlets accept 1/2" copper, 1/2" iron pipe, PEX or CPVC adapters • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU101 RU101SS	Screwdriver Stops	64 91
	Flash Shower Rough-In Valve With Stub-out Connections • 1/2" Stub-out inlets/outlets accept 1/2" press-connect fittings • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU102 RU102SS	Screwdriver Stops	64 91
	Flash Shower Rough-In Valve With PEX Crimp Connections • 1/2" PEX crimp inlets/Universal outlets (ASTM F1807) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU107 RU107SS	Screwdriver Stops	64 91
F	Flash Shower Rough-In Valve With PEX Crimp Elbow Connections • 1/2" PEX crimp elbow inlets/Universal outlets (ASTM F1807) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU107E RU107ESS	Screwdriver Stops	84 11 ⁻
	Flash Shower Rough-In Valve With PEX Cold Expansion Connections • 1/2" PEX cold expansion inlets/Universal outlets (ASTM F1960) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU108 RU108SS	Screwdriver Stops	64 91
	Flash Shower Rough-In Valve With PEX Cold Expansion Elbow Connections • 1/2" PEX cold expansion elbow inlets/Universal outlets (ASTM F1960) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU108E RU108ESS	Screwdriver Stops	84 111
	Flash Shower Rough-In Valve With CPVC Connections • 1/2" CPVC inlets/Universal outlets • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU109 RU109SS	Screwdriver Stops	84 111

* When combined with Double Ceramic pressure balance cartridge.

American Standard

2:Handle Thermostatic Valve Trim Kit Part 420740.295 Brushed Nit : Metal were handles : Less valve (must be purchased separately) For use with rough-in valves R520, R522, R523 and R5235 RVA : Vision of the temperature of the purchased separately) For use with rough-in valves R520, R522, R523 and R5235 N/A : Vision of the temperature of the purchased separately) * R520 N/A : Vision of the temperature of temperate of temperature of temperature of temperature of temperature of	SH LIST PRIC	COLOR/FINISH	SKU #		DESCRIPTION	
 		Polished Chror Brushed Nicke		Â	2-Handle Thermostatic Valve Trim Kit Metal wall escutcheon Metal lever handles 	
With On/Off and Volume Control 9:12/(13.mm) NPT intes/outlets 9:39 gpm/22.3 L/min at 40 psi 1:50 phanelic controls On/Off and Volume 1: Caratherm "valves are thermostatically controlled to maintain a constant shower temperature selections 1: All Caratherm "valves are thermostatically controlled to maintain a constant shower temperature selections 1: Hot Limit Safety Stops to a maximum of 112°F (44°C) with interim stops for local conditions 1: Hot Limit Safety Stops Sto and 2010 the Type T 1: Requires separate diverter valve when used with more than one outlet Viria Built-In 2-Wap Diverter CEO 1: Caratherm "valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature along the transmitter of the second with more than one outlet Viria Caratherm valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature charges Algustable temperature selections • Mice Table to adjustable temperature selections • Max Caratherm valves are thermostatically controlled to maintain a constant shower temperature selections • Mice Table to adjustable temperature selections • Mice Tables to a djascrete functions • Mice Table to maintain a constant shower temperature selections • Mice Tables to a djascrete functions • Mice Tables to a djascrete functions • Mice Tables to a	map SR 🖉		nd R523S	R523 and	For use with rough-in valves R520, R522, R522S, F	
With Built-in 2-Way Diverter CEO • 1/2" (13 mm) NPT inlets/outlets 6.5 g gm/24.6 L/min at 40 psi • Top handle controls On/Off, Volume and Diverter functions Diverts to 2 discrete functions • All Ceratherm valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature changes • All Ceratherm valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature selections • Adjustable temperature selections • Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions • Meets ASSE Standard 1016 – Type T • Meets ASSE Standard 1016 – Type T • Requires twin ell for use with diverter tub spout * R522S N/A Same as Above • R522S N/A • Diverts to 2 Discrete/1 Shared Function * R523 N/A • Diverts to 2 Discrete/1 Shared Function * R523 N/A • Diverts to 2 Discrete/1 Shared Function * R523 N/A • Diverts to 2 Discrete/1 Shared Function * R523 N/A • Diverts to 3 Discrete functions • CEO * R523 N/A • Diverts to 3 discrete functions • Diverts to 3 discrete functions • Diverts to 3 discrete functions	358 Sr Ø	N/A	* R520		 With On/Off and Volume Control 1/2" (13 mm) NPT inlets/outlets 5.9 gpm/22.3 L/min at 40 psi Top handle controls On/Off and Volume 1 Function All Ceratherm^{TV} valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature changes Adjustable temperature selections Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T Requires separate diverter valve when used 	
With Built-In 2-Way Diverter CEO • 1/2" (13 mm) NPT inlets/outlets • 6.5 g gm/24.6 L/min at 40 psi • Top handle controls On/Off, Volume and Diverter functions • Diverts to 2 discrete functions • All Ceratherm valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature changes • Adjustable temperature selections • Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions • Meets ASSE Standard 1016 – Type T • Requires twin ell for use with diverter tub spout • R522S N/A Same as Above * R522S N/A • Diverts to 2 Discrete/1 Shared Function * R523 N/A • Diverts to 2 Discrete/1 Shared Function • CEO * R523 N/A • Diverts to 2 Discrete/1 Shared Function • CEO * R523 N/A • Diverts to 2 Discrete/1 Shared Function • CEO * R523 N/A • Diverts to 2 Discrete/1 Shared Function • CEO * R523 N/A • Diverts to 2 Discrete/1 Shared Function • CEO * R523 N/A • Diverts to 3 discrete functions • Top handle controls On/Off, Volume and Diverter functions • Diverts to 3 discrete functions						
Diverts to 2 Discrete/1 Shared Function CEO * R523 N/A Vith Built-In 3-Way Diverter 1/2" (13 mm) NPT inlets/outlets 6.5 gpm/24.6 L/min at 40 psi Top handle controls On/Off, Volume and Diverter functions Diverts to 3 discrete functions	325 Sr Ø	N/A			 With Built-In 2-Way Diverter 1/2" (13 mm) NPT inlets/outlets 6.5 gpm/24.6 L/min at 40 psi Top handle controls On/Off, Volume and Diverter functions Diverts to 2 discrete functions All Ceratherm valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature changes Adjustable temperature selections Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T 	
Diverts to 2 Discrete/1 Shared Function Diverts to 2 Discrete/1 Shared Function 2-Handle Thermostatic Rough-In Valve * R523 N/A With Built-In 3-Way Diverter • 1/2" (13 mm) NPT inlets/outlets • 6.5 gpm/24.6 L/min at 40 psi • Top handle controls On/Off, Volume and Diverter functions • Diverts to 3 discrete functions	325	N/A	* B522S		Same as Above	
With Built-In 3-Way Diverter CEO • 1/2" (13 mm) NPT inlets/outlets • 6.5 gpm/24.6 L/min at 40 psi • Top handle controls On/Off, Volume and Diverter functions • Diverts to 3 discrete functions		N/A				
 All Ceratherm valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature changes Adjustable temperature selections Hot Limit Safety Stop is set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T Requires twin ell for use with diverter tub spout 	352 Sr 🖉	N/A			 With Built-In 3-Way Diverter 1/2" (13 mm) NPT inlets/outlets 6.5 gpm/24.6 L/min at 40 psi Top handle controls On/Off, Volume and Diverter functions Diverts to 3 discrete functions All Ceratherm valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature changes Adjustable temperature selections Hot Limit Safety Stop is set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T 	
	352	N/A	* R523S		Same as Above Diverts to 3 Discrete/2 Shared Functions 	



DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
 Portsmouth Central Thermostatic Valve Trim Kit Metal wall escutcheon Metal lever handle Less valve (must be purchased separately) Must order with On/Off volume control to complete system 	Â	* T420730.002 * T420730.295 * T420730.224	Polished Chrome Brushed Nickel Oil Rubbed Bronze	168 236 247
For use with rough-in valves R510 and R530			мар	SRÌ 🖉
Portsmouth Central Thermostatic Valve Trim Kit • Metal wall escutcheon • Metal cross handle • Less valve (must be purchased separately) • Must order with On/Off volume control to complete system	Â	* T420732.002 * T420732.295 * T420732.224	Polished Chrome Brushed Nickel Oil Rubbed Bronze	168 236 247
For use with rough-in valves R510 and R530			MAP	SR Ø
 Central Thermostatic Rough-In Valve 1/2" (13 mm) NPT inlets/outlets 9.5 gpm/35.9 L/min at 40 psi All Ceratherm[™] valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature changes Adjustable temperature selections Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T Must order with On/Off volume control to complete system When used as a bath/shower a separate diverter valve is required (R422, R422S, R433, R433S or diverter tub spout) Requires twin ell for use with diverter tub spout 		* R510	N/A	381
 Central Thermostatic Rough-In Valve 3/4" (19 mm) NPT inlets/outlets 16 gpm/60.6 L/min at 40 psi All Ceratherm valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature changes Adjustable temperature selections Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T Must order with On/Off volume control to complete system When used as a bath/shower a separate diverter valve is required (R422, R422S, R433, R433S or diverter tub spout) 		* R530	N/A	436
 Requires twin ell for use with diverter tub spout 				



Bath/Shower Trim Kits and Valves

Portsmouth


 DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Portsmouth On/Off Volume Control Valve Trim Kit • Metal lever handle • Less valve (must be purchased separately)	Â	* T420700.002 * T420700.295	Polished Chrome Brushed Nickel	79 112
For use with rough-in valves R701 and R711			MA	SR 🖉
Portsmouth On/Off Volume Control Valve Trim Kit • Metal cross handle • Less valve (must be purchased separately)	Â	* T420702.002 * T420702.295	Polished Chrome Brushed Nickel	79 112
For use with rough-in valves R701 and R711			MA	P (SR) 🖉
 1/2" (13 mm) On/Off Volume Control Rough-In Valve 1/2" (13 mm) inlet/outlet 		R701	N/A	69
				SR 🖉
3/4" (19 mm) On/Off Volume Control Rough-In Valve • 3/4" (19 mm) inlet/outlet		R711	N/A	105
				SR Ø
Portsmouth Diverter Valve Trim Kit • Metal lever handle • Less valve (must be purchased separately)	Â	* T420430.002 * T420430.295	Polished Chrome Brushed Nickel	106 148
For use with rough-in valves R422, R422S, R433	3 and R433	s	MA	SR 🖉
Portsmouth Diverter Valve Trim Kit • Metal cross handle • Less valve • Less valve (must be purchased separately)	(Å)	* T420432.002 * T420432.295	Polished Chrome Brushed Nickel	106 148
For use with rough-in valves R422, R422S, R433	3 and R433	S	MA	P 🗊 🖉
 2-Way In-Wall Diverter Rough-In Valve Controls water flow between 2 outlets (shower or sprays) 	CEO	R422	N/A	205
2 Discrete functions				Ísrì 🖉
Same as Above Diverts to 2 Discrete/1 Shared function 		R422S	NA	205 Sr 🖉
 3-Way In-Wall Diverter Rough-In Valve	CEO	R433	NA	232
 Controls water flow between 3 outlets 				
 Controls water flow between 3 outlets (shower or sprays) 3 Discrete functions 				SR Ø


American Standard

Shower Systems

Portsmouth Thermostatic Bath/Shower System

Portsmouth Thermostatic Shower System

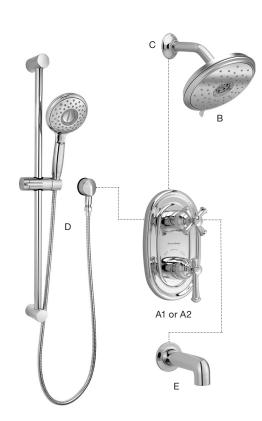

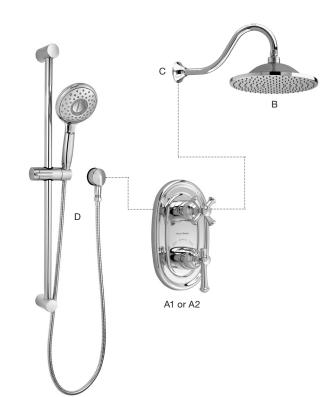

Portsmouth Thermostatic Bath/Shower System

				LIST PRICE	FOR SYSTEM
	DESCRIPTION	QTY	SKU #	002	295
А	Portsmouth 2-Handle Thermostatic Valve Trim Kit	1	T420740	241	338
в	Spectra Fixed® Traditional Showerhead	1	9135073	98	121
С	Standard Shower Arm	1	1660240	25	33
D	Spectra Handheld [®] Slide Bar Kit	1	1660775	219	296
Е	Studio [®] S Tub Spout	1	8888316	83	124
equi	red Components (not shown)				
1	2-Handle Thermostatic Rough-In Valve With Built-In 3-Way Diverter - Non-Shared Function	1	R523	3	52
OR	(Choose R523 or R523S)				
2	2-Handle Thermostatic Rough-In Valve With Built-In 3-Way Diverter - Shared Function	1	R523S	3	52
	Bath/S	hower S	vstem Total	1,018	1,264
orts	Bath/S mouth Thermostatic Shower System	hower S	system Total	1,018	1,264
orts		hower S	system Total	1,018 LIST PRICE	
orts		hower S QTY	system Total		
orts A	mouth Thermostatic Shower System			LIST PRICE	FOR SYSTEM
	mouth Thermostatic Shower System DESCRIPTION	QTY	SKU #	LIST PRICE	FOR SYSTEN
A	mouth Thermostatic Shower System DESCRIPTION Portsmouth 2-Handle Thermostatic Valve Trim Kit	QTY	SKU # T420740	LIST PRICE 002 241	FOR SYSTEM 295 338
A B	DESCRIPTION Portsmouth 2-Handle Thermostatic Valve Trim Kit 10" Traditional Rain Showerhead	QTY 1 1	SKU # T420740 1660610	LIST PRICE 002 241 212	FOR SYSTEM 295 338 300
A B C D	DESCRIPTION Portsmouth 2-Handle Thermostatic Valve Trim Kit 10" Traditional Rain Showerhead 12" Wall-Mount Shepherd's Hook Shower Arm	QTY 1 1 1	SKU # T420740 1660610 1660198	LIST PRICE 002 241 212 91	FOR SYSTEM 295 338 300 136
A B C D	DESCRIPTION Portsmouth 2-Handle Thermostatic Valve Trim Kit 10" Traditional Rain Showerhead 12" Wall-Mount Shepherd's Hook Shower Arm Spectra Handheld Slide Bar Kit	QTY 1 1 1	SKU # T420740 1660610 1660198	LIST PRICE 002 241 212 91 219	FOR SYSTEM 295 338 300 136
A B C D equir	DESCRIPTION Portsmouth 2-Handle Thermostatic Valve Trim Kit 10" Traditional Rain Showerhead 12" Wall-Mount Shepherd's Hook Shower Arm Spectra Handheld Slide Bar Kit red Components (not shown)	QTY 1 1 1 1 1	SKU # T420740 1660610 1660198 1660775	LIST PRICE 002 241 212 91 219	FOR SYSTEM 295 338 300 136 296
A B C D	DESCRIPTION DESCRIPTION Portsmouth 2-Handle Thermostatic Valve Trim Kit 10" Traditional Rain Showerhead 12" Wall-Mount Shepherd's Hook Shower Arm Spectra Handheld Slide Bar Kit red Components (not shown) 2-Handle Thermostatic Rough-In Valve With Built-In 2-Way Diverter – Non-Shared Function	QTY 1 1 1 1 1	SKU # T420740 1660610 1660198 1660775	LIST PRICE 002 241 212 91 219 3	FOR SYSTER 295 338 300 136 296

Shower System Total

American Standard

^{1,088 1,395}

Accessories

	DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
Ciè	TR Series 18" Towel Bar • Brass bar • All metal construction • Concealed mounting	8334018.002 8334018.295	Polished Chrome Brushed Nickel	58 82
			МАР	SR Ø
<u>C.</u>	TR Series 24" Towel Bar • Brass bar • All metal construction • Concealed mounting	8334024.002 8334024.295	Polished Chrome Brushed Nickel	62 86
			MAP	
C	TR Series Towel Ring • 7" (178 mm) diameter ring • All metal construction • Concealed mounting	8334190.002 8334190.295	Polished Chrome Brushed Nickel	36 50
			MAP	SR Ø
	TR Series Double Robe Hook • All metal construction • Concealed mounting	8334210.002 8334210.295	Polished Chrome Brushed Nickel	27 38
			MAP	SR Ø
14 (a) (a)	TR Series Toilet Paper Holder • All metal construction • Concealed mounting	8334230.002 8334230.295	Polished Chrome Brushed Nickel	47 67
			MAP	SR Ø

Portsmouth

Inspired by Victorian perfume bottles, the **Quentin Collection** is a statuesque design distinguished by soft curves and a gently arched spout, perfect in a traditional setting.



420 List Price Guide 2020

American Standard

Bathroom Faucets





★ DISCONTINUED. Available while supplies last.

List Price Guide 2020

421

Sink and Bath Faucets

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Definite by PHON DAT	 Quentin Widespread Faucet Brass construction Washerless ceramic disc valve cartridges Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Brass swivel spout Cast brass valve bodies with flexible hose connections for 6" – 12" (152 – 305 mm) installations Metal lever handles Metal Speed Connect® pop-up drain 	(Å) CEO	7440851.002 7440851.295	Polished Chrome Brushed Nickel	381 533
Certified by Leven Ast	Quentin Widespread Faucet • Brass construction • Washerless ceramic disc valve cartridges • Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator • Brass swivel spout • Cast brass valve bodies with flexible hose connections for 6" – 12" (152 – 305 mm) installations • Metal lever handles • Metal Speed Connect pop-up drain	(Å) CEO	7440801.002 7440801.295	Polished Chrome Brushed Nickel	394 551
General Revision of the Revisi	Quentin Monoblock faucet • Brass swivel spout • Metal lever handle • Braided flexible hoses with 3/8" (10 mm) compression connectors • Metal Speed Connect pop-up drain	ADA CEO	7440101.002 7440101.295	Polished Chrome Brushed Nickel	335 469
	Escutcheon Plate • For use with 7440101		2000102P.002 2000102P.295	Polished Chrome Brushed Nickel	44 62 (SR)
	Quentin Single Control Vessel Lavatory Faucet • Brass swivel spout • Braided flexible hoses with 3/8" (10 mm) compression connectors • Metal lever handle • Grid drain	Â) Ceo	* 7440152.002 * 7440152.295	Polished Chrome Brushed Nickel	412 577
	Quentin Single Control Vessel Lavatory Faucet • Same as 7440152 • Less drain		* 7440151.002 * 7440151.295	Polished Chrome Brushed Nickel	381 533

 \bigstar DISCONTINUED. Available while supplies last.

American Standard

Sink and Bath Faucets

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
	Quentin Roman Tub Filler Trim Kit With Personal Shower • Brass construction • All personal showers feature 5' (152 cm) long hose • Metal lever handles • Personal shower with 1.8 gpm/6.8 L/min maximum flow	CEO	T440901.002 T440901.295	Polished Chrome Brushed Nickel	716 1,003
	For use with Flash® roman tub filler rough-in valve F	910			
	Quentin Roman Tub Filler Trim Kit • Brass construction • Metal lever handles • Less personal shower	(Å	T440900.002 * T440900.295	Polished Chrome Brushed Nickel	551 772
	For use with Flash roman tub filler rough-in valve R	00			
	 Flash Roman Tub Filler Rough-In Valve With Personal Shower Brass construction and washerless 1/4 turn ceramic disc valve cartridges 1/2" copper inlets Connections to spout can be made via flexible hoses (provided) or 1/2" copper sweat connections 14 gpm/52.9 L/min maximum flow rate at 40 psi 8" - 16" (203 - 406 mm) flexible installation Adjustable rough-in: 2-1/2" (64 mm) maximum deck thickness Includes hand shower rough-in 		R910	N/A	286
	 Flash Roman Tub Filler Rough-In Valve Brass construction and washerless 1/4 turn ceramic disc valve cartridges 1/2" copper inlets Connections to spout can be made via flexible hoses (provided) or 1/2" copper sweat connections 14 gpm/52.9 L/min maximum flow rate at 40 psi 8" - 16" (203 - 406 mm) flexible installation Adjustable rough-in: 2-1/2" (64 mm) maximum deck thickness 		R900	N/A	163

Quentin

Bath/Shower Trim Kits and Valves

		oose rough-in val [,] lesired connectio		Fully installed Bath/Sh	ower
HOW TO Order					
	Flash	Shower Rough	-In Valve	Ğ	
	DESCRIPTION	Chower Hough	SKU #	COLOR/FINISH	LIST PRIC
	Quentin Bath/Shower Trim Kit • Includes Double Ceramic pressure balance cartridge • 6" (152 mm) brass rain showerhead, 2.5 gpm/9.5 L/min • 12-1/2" (320 mm) shower arm and flange • Metal wall escutcheon • Metal lever handle • Metal slip-on diverter tub spout		TU440502.002 TU440502.295	Polished Chrome Brushed Nickel	371 508
	For use with Flash shower rough-in valves			MA) îr <i>Q</i>
	Quentin Shower Only Trim Kit • Includes Double Ceramic pressure balance cartridge • 6" (152 mm) brass rain showerhead, 2.5 gpm/9.5 L/min • 12-1/2" (320 mm) shower arm and flange • Metal wall escutcheon • Metal lever handle	Ą	TU440501.002 TU440501.295	Polished Chrome Brushed Nickel	317 433
	For use with Flash shower rough-in valves			MAI	SR 0
	Quentin Valve Only Trim Kit Includes Double Ceramic pressure balance cartridge Metal wall escutcheon Metal lever handle	Â	TU440500.002 TU440500.295	Polished Chrome Brushed Nickel	218 296
	For use with Flash shower rough-in valves			MA) îsr 🖉
	Quentin Bath/Shower Trim Kit Includes Double Ceramic pressure balance cartridge Water-saving 7-1/4" (184 mm) Spectra Fi: Traditional showerhead, 1.8 gpm/6.8 L/m Shower arm and flange Metal wall escutcheon Metal lever handle Metal slip-on diverter tub spout		* TU440508.002 * TU440508.295	Polished Chrome Brushed Nickel	371 508
5	For use with Flash shower rough-in valves			MAI	SR 🖉
	Quentin Shower Only Trim Kit Includes Double Ceramic pressure balance cartridge Water-saving 7-1/4" (184 mm) Spectra Fit Traditional showerhead, 1.8 gpm/6.8 L/m Shower arm and flange Metal wall escutcheon Metal lever handle		* TU440507.002 * TU440507.295	Polished Chrome Brushed Nickel	317 433
				MAI	

Quentin

Bath/Shower Trim Kits and Valves

Quentin[®]

	DESCRIPTION	SKU #		LIST PRIC
	Flash [®] Shower Rough-In Valve With Universal Connections • 1/2" Male NPT/Sweat inlets/outlets accept 1/2" copper, 1/2" iron pipe, PEX or CPVC adapters • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim	RU101 RU101SS	Screwdriver Stops	64 91
	For use with TU series pressure balance bath/shower trim kits			
	 Flash Shower Rough-In Valve With Stub-out Connections 1/2" Stub-out inlets/outlets accept 1/2" press-connect fittings Brass valve body Flow rate: 5.1 gpm @ 45 psi* Back-to-back capability Includes test plug with stainless steel ring Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits 	RU102 RU102SS	Screwdriver Stops	64 91
	Flash Shower Rough-In Valve With PEX Crimp Connections • 1/2" PEX crimp inlets/Universal outlets (ASTM F1807) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim	RU107 RU107SS	Screwdriver Stops	64 91
	For use with TU series pressure balance bath/shower trim kits			
TOT	Flash Shower Rough-In Valve With PEX Crimp Elbow Connections • 1/2" PEX crimp elbow inlets/Universal outlets (ASTM F1807) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim	RU107E RU107ESS	Screwdriver Stops	84 111
	For use with TU series pressure balance bath/shower trim kits			
	Flash Shower Rough-In Valve With PEX Cold Expansion Connections • 1/2" PEX cold expansion inlets/Universal outlets (ASTM F1960) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU108 RU108SS	Screwdriver Stops	64 91
	Flash Shower Rough-In Valve With PEX Cold Expansion Elbow Connections • 1/2" PEX cold expansion elbow inlets/Universal outlets (ASTM F1960) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU108E RU108ESS	Screwdriver Stops	84 111
	Flash Shower Rough-In Valve With CPVC Connections • 1/2" CPVC inlets/Universal outlets • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim	RU109 RU109SS	Screwdriver Stops	84 111

 $\star\,$ When combined with Double Ceramic pressure balance cartridge.

American Standard

Bath/Shower Trim Kits and Valves

DESCRIPTION		SKU #	COLOR/FINISH	LIST PRIC
 Quentin 2-Handle Thermostatic Valve Trim Kit Metal wall escutcheon Metal lever handles Less valve (must be purchased separately) 	(Å)	* T440740.002 * T440740.295 * T440740.224	Polished Chrome Brushed Nickel Oil Rubbed Bronze	246 343 360
For use with rough-in valves R520, R522, R522S, R5	523 and	I R523S	~	
 2-Handle Thermostatic Rough-In Valve With On/Off and Volume Control 1/2" (13 mm) NPT inlets/outlets 5.9 gpm/22.3 L/min at 40 psi Top handle controls On/Off and Volume 1 Function All Ceratherm[™] valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature selections Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T Requires separate diverter valve when used with more than one outlet 		* R520	NA	358 (SR)
 2-Handle Thermostatic Rough-In Valve		* R522	NA	325
 With Built-in 2-Way Diverter 1/2" (13 mm) NPT inlets/outlets 6.5 gpm/24.6 L/min at 40 psi Top handle controls On/Off, Volume and Diverter functions Diverts to 2 discrete functions All Ceratherm valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature selections Adjustable temperature selections Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T Requires twin ell for use with diverter tub spout 	CEO			(SR)
Same as Above Diverts to 2 Discrete/1 Shared Function 		* R522S	NA	325 Sr 0
 2-Handle Thermostatic Rough-In Valve With Built-in 3-Way Diverter 1/2" (13 mm) NPT inlets/outlets 6.5 gpm/24.6 L/min at 40 psi Top handle controls On/Off, Volume and Diverter functions Diverts to 3 discrete functions All Ceratherm valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature changes Adjustable temperature selections Hot Limit Safety Stop is set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T Requires twin ell for use with diverter tub spout 	CEO	* R523	NA	352 (SR)
Same as AboveDiverts to 3 Discrete/2 Shared Function		* R523S	NA	352 Sr 2

426 List Price Guide 2020




DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Quentin Central Thermostatic Valve Trim Kit • Metal wall escutcheon • Metal lever handle • Less valve (must be purchased separately) • Must order with On/Off volume control to complete system	Â	* T440730.002 * T440730.295 * T440730.224	Polished Chrome Brushed Nickel Oil Rubbed Bronze	172 240 252
For use with rough-in valves R510 and R530			МАР	
 Central Thermostatic Rough-In Valve Body 1/2" (13 mm) NPT inlets/outlets 9.5 gpm/35.9 L/min at 40 psi All Ceratherm[™] valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature changes Adjustable temperature selections Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T Must order with On/Off volume control to complete system When used as a bath/shower a separate diverter valve is required (R422, R422S, R433, R433S or diverter tub spout) Requires twin ell for use with diverter tub spout 		* R510	NA	381
 Central Thermostatic Rough-In Valve Body 3/4" (19 mm) NPT inlets/outlets 16 gpm/60.6 L/min at 40 psi All Ceratherm valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature changes; adjustable temperature selections Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T Must order with On/Off volume control to complete system When used as a bath/shower a separate diverter valve is required (R422, R422S, R433, R433S or diverter tub spout) 		* R530	NA	436
diverter tub spout) Requires twin ell for use with diverter tub spout 				

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PR
	Quentin On/Off Volume Control Valve Trim Kit • Metal lever handle • Less valve (must be purchased separately)	(Å)	T440700.002 * T440700.295	Polished Chrome Brushed Nickel	80 113
	For use with rough-in valves R701 and R711			MA	P (SR)
	 1/2" (13 mm) On/Off Volume Control Rough-In Valve 1/2" (13 mm) inlet/outlet 		R701	NA	69
					SR 0
	 3/4" (19 mm) On/Off Volume Control Rough-In Valve 3/4" (19 mm) inlet/outlet 		R711	NA	105
					SR (
	Quentin Diverter Valve Trim Kit • Metal lever handle • Less valve (must be purchased separately)	Â	T440430.002 * T440430.295	Polished Chrome Brushed Nickel	108 151
L	For use with rough-in valves R422, R422S, R433	3 and R4338	8	MA	P SR (
	 2-Way In-Wall Diverter Rough-In Valve Controls water flow between 2 outlets (shower or sprays) 2 Discrete functions 	CEO	R422	NA	205
	Same as Above Diverts to 2 Discrete/1 Shared function 		R422S	NA	205
					SR 0
	 3-Way In-Wall Diverter Rough-In Valve Controls water flow between 3 outlets (shower or sprays) 3 Discrete functions 	CEO	R433	NA	232
	Same as Above Diverts to 3 Discrete/3 Shared functions 		R433S	NA	(SR) (232



Shower Systems



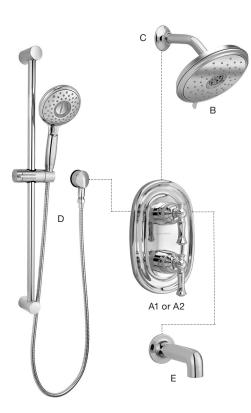



Quentin Thermostatic Bath/Shower System

				LIST PRICE FOR SYSTEM	
	DESCRIPTION	QTY	SKU #	002	295
А	Quentin 2-Handle Thermostatic Valve Trim Kit	1	T440740	246	343
в	Spectra Fixed® Traditional Showerhead	1	9135073	98	121
С	Standard Shower Arm	1	1660240	25	33
D	Spectra Handheld® Slide Bar Kit	1	1660775	219	296
Е	Studio® S Tub Spout	1	8888316	83	116
equi	red Components (not shown)				
1	2-Handle Thermostatic Rough-In Valve With Built-In 3-Way Diverter - Non-Shared Function	1	R523	352	
OR	(Choose R523 or R523S)				
2	2-Handle Thermostatic Rough-In Valve With Built-In 3-Way Diverter – Shared Function	1	R523S	352	
2					

Quentin Thermostatic Shower System

				LIST PRICE FOR SYSTEM	
	DESCRIPTION	QTY	SKU #	002	295
A	Quentin 2-Handle Thermostatic Valve Trim Kit	1	T440740	246	343
в	10" Traditional Rain Showerhead	1	1660610	212	300
С	12" Wall-Mount Shepherd's Hook Shower Arm	1	1660198	91	136
D	Spectra Handheld Slide Bar Kit	1	1660775	219	296
<u> </u>			1000110	210	200
	red Components (not shown) 2-Handle Thermostatic Rough-In Valve With Built-In 2-Way Diverter – Non-Shared Function	1	R522		230
	red Components (not shown)	1			
equir 1	red Components (not shown) 2-Handle Thermostatic Rough-In Valve With Built-In 2-Way Diverter – Non-Shared Function	1		32	

American Standard

List Price Guide 2020

429

Accessories

	DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
Circo Circo	TR Series 18" Towel Bar • Brass bar • All metal construction • Concealed mounting	8334018.002 8334018.295	Polished Chrome Brushed Nickel	58 82
			MA	sr Ø
<u>Ca</u>	TR Series 24" Towel Bar • Brass bar • All metal construction • Concealed mounting	8334024.002 8334024.295	Polished Chrome Brushed Nickel	62 86
			MA	sr Ø
	TR Series Towel Ring • 7" (178 mm) diameter ring • All metal construction • Concealed mounting	8334190.002 8334190.295	Polished Chrome Brushed Nickel	36 50
			MA) îr 🖉
	TR Series Double Robe Hook • All metal construction • Concealed mounting	8334210.002 8334210.295	Polished Chrome Brushed Nickel	27 38
			MAI	P 🔝 🖉
of the second	TR Series Toilet Paper Holder • All metal construction • Concealed mounting	8334230.002 8334230.295	Polished Chrome Brushed Nickel	47 67
			MAI	P <u>SR</u> 🖉

430 List Price Guide 2020

American Standard

Quentin®



Quentin


American Standard

Practical by design, the **Reliant 3 Collection** boasts ergonomic features for enhanced functionality without sacrificing style, and superior engineering for dependable use.



American Standard

Sink

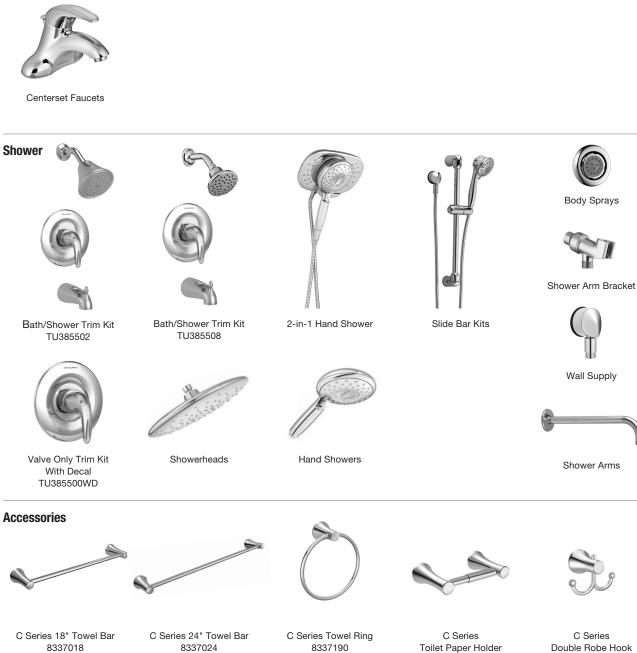

Double Robe Hook 8337210

8337230

Reliant 3

American Standard

Sink and Bath Faucets

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Control of the formation of the formatio	 Reliant 3 Centerset Faucet Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator 47 mm ceramic disc valve cartridge with an adjustable Hot Limit Safety Stop Cast brass waterway Braided flexible supply hoses with 3/8" (10 mm) compression connectors Red/Blue index button included Metal lever handle Metal Speed Connect[®] pop-up drain 	(A) CEO	7385000.002 7385000.295	Polished Chrome Brushed Nickel	174 244
	Reliant 3 Centerset Faucet • Same as 7385000 • Extra long supply hoses	ÂD Ceo	7385LS000.002	Polished Chrome	174
	Reliant 3 Centerset Faucet • Same as 7385000 • Extra long lever handle	ÂDA CEO	7385LH000.002	Polished Chrome	179
Control With the two t	 Reliant 3 Centerset Faucet Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator 47 mm ceramic disc valve cartridge with an adjustable Hot Limit Safety Stop Cast brass waterway Braided flexible supply hoses with 3/8" (10 mm) compression connectors Red/Blue index button included Indexed Red/Blue metal lever handle Metal Speed Connect pop-up drain 	ADA CEO	7385008.002 * 7385008.295	Polished Chrome Brushed Nickel	179 251
	 Reliant 3 Centerset Faucet Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator 47 mm ceramic disc valve cartridge with an adjustable Hot Limit Safety Stop Cast brass waterway Braided flexible supply hoses with 3/8" (10 mm) compression connectors Red/Blue index button included Indexed Red/Blue metal lever handle Grid drain Less pop-up hole 	ADA CEO	7385003.002	Polished Chrome	174
	Reliant 3 Centerset Faucet • Same as 7385003 • 0.5 gpm/1.9 L/min vandal-resistant pressure-compensating aerator • Extra long lever handle	ÂÂ Ceo	7385LHV05003.002	Polished Chrome	174

434 List Price Guide 2020

American Standard

Reliant 3®

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Definition by RPMORET	 Reliant 3 Centerset Faucet Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator 47 mm ceramic disc valve cartridge with an adjustable Hot Limit Safety Stop Cast brass waterway Braided flexible supply hoses with 3/8" (10 mm) compression connectors Red/Blue index button included Indexed Red/Blue metal lever handle Less drain Less pop-up rod With pop-up hole 	AD CEO	7385007.002	Polished Chrome	157
Control of the second s	 Reliant 3 Centerset Faucet Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator 47 mm ceramic disc valve cartridge with an adjustable Hot Limit Safety Stop Cast brass waterway Braided flexible supply hoses with 3/8" (10 mm) compression connectors Red/Blue index button included Indexed Red/Blue metal lever handle Less drain Less pop-up rod Less pop-up hole 	ADA CEO	7385004.002 7385004.295	Polished Chrome Brushed Nickel	157 219
	 Reliant 3 Centerset Faucet Water-conserving 0.5 gpm/1.9 L/min pressure-compensating spray 47 mm ceramic disc valve cartridge with an adjustable Hot Limit Safety Stop All metal construction Vandal-resistant non-aerator spray Cast brass waterway Braided flexible supply hoses with 3/8" (10 mm) compression connectors Red/Blue index button included Indexed Red/Blue metal lever handle Metal Speed Connect[®] pop-up drain 	ADA CEO	7385058.002	Polished Chrome	177
	 Reliant 3 Centerset Faucet Water-conserving 0.5 gpm/1.9 L/min pressure-compensating spray 47 mm ceramic disc valve cartridge with an adjustable Hot Limit Safety Stop All metal construction Vandal-resistant non-aerator spray Cast brass waterway Braided flexible supply hoses with 3/8" (10 mm) compression connectors Red/Blue index button included Indexed Red/Blue metal lever handle Grid drain Less pop-up hole 	Â) Ceo	7385053.002	Polished Chrome	177

American Standard

Reliant 3®

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
	Reliant 3 Centerset Faucet	(Å	7385050.002	Polished Chrome	160
	 Water-conserving 0.5 gpm/1.9 L/min pressure-compensating spray 47 mm ceramic disc valve cartridge with an adjustable Hot Limit Safety Stop All metal construction Vandal-resistant non-aerator spray Cast brass waterway Braided flexible supply hoses with 3/8" (10 mm) compression connectors Indexed Red/Blue metal lever handle Less drain Less pop-up hole 	CEO			
	Reliant 3 Centerset Faucet	ADA	7385045.002	Polished Chrome	209
Certific Levels		CEO			
	Reliant 3 Centerset Faucet	ÁÐ.	7385047.002	Polished Chrome	190
Certific Units	 Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator 47 mm ceramic disc valve cartridge with an adjustable Hot Limit Safety Stop All metal construction Cast brass waterway 3/8" (10 mm) copper supplies with 1/2" (13 mm) male adapters Metal lever handle Red/Blue index button included Less drain Less pop-up hole 	CEO			





HOW TO ORDER		noose rough-in valve with desired connection.	Fully installed Bath/Sho	ower
	DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
	 Reliant 3 Bath/Shower Trim Kit Includes Double Ceramic pressure balance cartridge "Easy Clean" 4-1/2" (115 mm) showerha 2.5 gpm/9.5 L/min maximum flow Shower arm and flange Metal wall escutcheon Metal lever handle Slip-on diverter tub spout For use with Flash shower rough-in valves 			173 232
	Reliant 3 Bath/Shower Trim Kit • Same as TU385502 • Red/Blue indicator ring For use with Flash shower rough-in valves	* TU38550	22WD.002 Polished Chrome	180
	Reliant 3 Shower Only Trim Kit • Includes Double Ceramic pressure balance cartridge • "Easy Clean" 4-1/2" (115 mm) showerhe 2.5 gpm/9.5 L/min maximum flow • Shower arm and flange • Metal wall escutcheon • Metal lever handle For use with Flash shower rough-in valves			138 182
	Reliant 3 Bath/Shower Trim Kit • Same as TU385501 • Less showerhead For use with Flash shower rough-in valves	ÁDA	01XH.295 Brushed Nickel	171
	Reliant 3 Valve Only Trim Kit • Includes Double Ceramic pressure balance cartridge • Metal wall escutcheon • Metal lever handle For use with Flash shower rough-in valves	ADA TU3855		97 126
	Reliant 3 Valve Only Trim Kit • Same as TU385500 • Red/Blue indicator ring For use with Flash shower rough-in valves	ÁDA	500WD.002 Polished Chrome	93



Trim kit with cartridge Flash [®] Show	ver Rough-In Valve	Ś	
DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
 Reliant 3 Bath/Shower Trim Kit Includes Double Ceramic pressure balance cartridge Water-saving 3-3/4" (96 mm) showerhead, 1.75 gpm/6.6 L/min maximum flow Shower arm and flange Metal wall escutcheon Metal lever handle Slip-on diverter tub spout 	TU385508.002 CEO * TU385508.295	Polished Chrome Brushed Nickel	173 232
For use with Flash shower rough-in valves			
 Reliant 3 Shower Only Trim Kit Includes Double Ceramic pressure balance cartridge Water-saving 3-3/4" (96 mm) showerhead, 1.75 gpm/6.6 L/min maximum flow Shower arm and flange Metal wall escutcheon Metal lever handle 	▲DA TU385507.002 ★ TU385507.295 CEO	Polished Chrome Brushed Nickel	138 182
For use with Flash shower rough-in valves			
Reliant 3 Bath/Shower Trim Kit Less Showerhead Includes Double Ceramic pressure balance cartridge Shower arm and flange Metal wall escutcheon Metal lever handle Slip-on diverter tub spout Red/Blue indicator ring	TU385502WDX * TU385502WDX		171 229
For use with Flash shower rough-in valves			
Reliant 3 Shower Only Trim Kit Less Showerhead • Includes Double Ceramic pressure balance cartridge • Shower arm and flange • Metal wall escutcheon • Metal lever handle • Red/Blue indicator ring	* TU385501WDX TU385501WDX		137 181
For use with Flash shower rough-in valves			



Bath/Shower Trim Kits and Valves

	DESCRIPTION	SKU #		LIST PRIC
	Flash® Shower Rough-In Valve With Universal Connections • 1/2" Male NPT/Sweat inlets/outlets accept 1/2" copper, 1/2" iron pipe, PEX or CPVC adapters • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU101 RU101SS	Screwdriver Stops	64 91
	Flash Shower Rough-In Valve With Stub-out Connections • 1/2" Stub-out inlets/outlets accept 1/2" press-connect fittings • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU102 RU102SS	Screwdriver Stops	64 91
	Flash Shower Rough-In Valve With PEX Crimp Connections • 1/2" PEX crimp inlets/Universal outlets (ASTM F1807) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU107 RU107SS	Screwdriver Stops	64 91
P O	Flash Shower Rough-In Valve With PEX Crimp Elbow Connections • 1/2" PEX crimp elbow inlets/Universal outlets (ASTM F1807) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU107E RU107ESS	Screwdriver Stops	84 111
	Flash Shower Rough-In Valve With PEX Cold Expansion Connections • 1/2" PEX cold expansion inlets/Universal outlets (ASTM F1960) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU108 RU108SS	Screwdriver Stops	64 91
	Flash Shower Rough-In Valve With PEX Cold Expansion Elbow Connections • 1/2" PEX cold expansion elbow inlets/Universal outlets (ASTM F1960) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU108E RU108ESS	Screwdriver Stops	84 111
	Flash Shower Rough-In Valve With CPVC Connections • 1/2" CPVC inlets/Universal outlets • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU109 RU109SS	Screwdriver Stops	84 111

 $\star\,$ When combined with Double Ceramic pressure balance cartridge.

American Standard

Reliant 3®

Accessories

	DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
	C Series 18" Towel Bar • Brass bar • All metal construction • Concealed mounting	8337018.002 8337018.013 8337018.295 8337018.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	58 82 82 88
			MAI	SR 🖉
	C Series 24" Towel Bar • Brass bar • All metal construction • Concealed mounting	8337024.002 8337024.013 8337024.295 8337024.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	62 86 86 92
A.			MAI	9 (SR) 🖉
	C Series Towel Ring • 7" (178 mm) diameter ring • All metal construction • Concealed mounting	8337190.002 8337190.013 8337190.295 8337190.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	36 50 50 54
			MAI) îr 🖉
	C Series Double Robe Hook • All metal construction • Concealed mounting	8337210.002 8337210.013 8337210.295 8337210.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	27 38 38 38 38 58 Ø
	C Series Toilet Paper Holder • All metal construction • Concealed mounting	8337230.002 8337230.013 8337230.295 8337230.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	47 67 67 72
			MAI) (SR) 🖉

American Standard





Lending stoic confidence to a modern setting, the **Serin Collection** features an arched faucet and substantial lever handles for a look that is as expressive as it is enduring.



American Standard

Serin[®]

Bathroom Faucets





★ DISCONTINUED. Available while supplies last.

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRIC
Contraction of the second seco	 Serin Widespread Faucet Brass construction Washerless ceramic disc valve cartridges Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Brass spout Cast brass valve bodies with flexible hose connections for 6" - 12" (152 - 305 mm) installations Metal lever handles Metal Speed Connect[®] pop-up drain 	CEO	2064801.002 * 2064801.295	Polished Chrome Brushed Nickel	406 568
Certified by Revolution	Serin Widespread Faucet • Brass construction • Washerless ceramic disc valve cartridges • Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator • Brass spout • Cast brass valve bodies with flexible hose connections for 6" – 12" (152 – 305 mm) installations • Metal lever handles • Metal Speed Connect pop-up drain	Â) Ceo	2064831.002 2064831.295	Polished Chrome Brushed Nickel	406 568
	Serin Widespread Faucet • Same as 2064831 • Less pop-up drain and hole	(DA) CEO	* 2064LDH831.002	Polished Chrome	377
	Serin Monoblock Faucet • Brass construction • Washerless ceramic disc valve cartridges • Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator • Cast brass spout • Braided flexible hoses with 3/8" (10 mm) compression connectors • Adjustable Hot Limit Safety Stop • Red/Blue index buttons included • Metal lever handle • Metal Speed Connect pop-up drain	Â) Ceo	2064101.002 2064101.295	Polished Chrome Brushed Nickel	311 436
	Serin Monoblock Faucet • Same as 2064101 • Less pop-up drain and hole	Â) Ceo	2064LDH101.002	Polished Chrome	289 Map (sr) Ø
	Serin Monoblock Faucet • Same as 2064101 • 1.0 gpm/3.8 L/min maximum flow	ADA CEO	* 2064F10101.002	Polished Chrome	299 Map SR Ø



	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Certified by Reveal to a second secon	Serin Petite Monoblock Faucet • Brass construction • Washerless ceramic disc valve cartridges • Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator • Cast brass spout • Braided flexible hoses with 3/8" (10 mm) compression connectors • Metal lever handle • Metal Speed Connect [®] pop-up drain	(Å) CEO	2064131.002 2064131.295	Polished Chrome Brushed Nickel	234 327
	Escutcheon Plate • For use with 2064101, 2064131		2064101P.002 2064101P.295	Polished Chrome Brushed Nickel	40 56 [SR] Ø
	Serin Single Control Vessel Faucet • Brass construction • Washerless ceramic disc valve cartridges • Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator • Cast brass spout • Braided flexible hoses with 3/8" (10 mm) compression connectors • Red/Blue index buttons included • Metal Speed Connect pop-up drain • Metal lever handle • Grid drain	(Å) CEO	2064152.002 * 2064152.295	Polished Chrome Brushed Nickel	373 524
	Serin Single Control Vessel Faucet • Same as 2064152 • Less drain	ADA CEO	2064151.002 * 2064151.295	Polished Chrome Brushed Nickel	343 482 P SR Ø
Read Bat	Serin 2-Handle Wall-Mount Lavatory Faucet • Brass construction • Washerless ceramic disc valve cartridges • Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator • Brass spout • Cast brass valve body • Metal lever handles • Grid drain	(DA) CEO	2064451.002 * 2064451.295	Polished Chrome Brushed Nickel	406 568
Control of the American Contro	Serin 1-Handle Wall-Mount Lavatory Faucet • Brass construction • Washerless ceramic disc valve cartridge • Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator • Brass spout • Cast brass valve body • Metal lever handles	Â) Ceo	2064461.002 * 2064461.295	Polished Chrome Brushed Nickel	406 568



Sink and Bath Faucets

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
	Serin Roman Tub Filler Trim Kit With Personal Shower • Brass construction • All personal showers feature 5' (152 cm) long hose • Metal lever handles • Personal shower with 1.8 gpm/6.8 L/min maximum flow	CEO	* T064901.002 * T064901.295	Polished Chrome Brushed Nickel	716 1,003
	For use with Flash [®] roman tub filler rough-in valve F	R910		MA	P SR Q
	Serin Roman Tub Filler Trim Kit • Brass construction • Metal lever handles • Less personal shower	Â	* T064900.002 * T064900.295	Polished Chrome Brushed Nickel	551 772
	For use with Flash roman tub filler rough-in valve R	900		MA	P SR 🖉
	 Flash Roman Tub Filler Rough-In Valve With Personal Shower Brass construction and washerless 1/4 turn ceramic disc valve cartridges 1/2" copper inlets Connections to spout can be made via flexible hoses (provided) or 1/2" copper sweat connections 14 gpm/52.9 L/min maximum flow rate at 40 psi 8" - 16" (203 - 406 mm) flexible installation Adjustable rough-in: 2-1/2" (64 mm) maximum deck thickness Includes hand shower rough-in 		R910	N/A	286
	 Flash Roman Tub Filler Rough-In Valve Brass construction and washerless 1/4 turn ceramic disc valve cartridges 1/2" copper inlets Connections to spout can be made via flexible hoses (provided) or 1/2" copper sweat connections 14 gpm/52.9 L/min maximum flow rate at 40 psi 8" - 16" (203 - 406 mm) flexible installation Adjustable rough-in: 2-1/2" (64 mm) maximum deck thickness 		R900	N/A	163
	Contemporary Round Freestanding Tub Filler With Personal Shower • Brass construction and 1/4 turn washerless ceramic disc valve cartridge • Personal shower features 59" (150 cm) long hose with 1.8 gpm/6.8 L/min maximum flow • Metal lever handle • Overall height: 44-3/4" (1137 mm) • Spout reach: 11-1/4" (286 mm) • Metal hand shower • Shower bracket pivots 60°	(Å) CEO	T064951.002 T064951.295	Polished Chrome Brushed Nickel	1,076 1,507
F	For use with Flash freestanding tub filler rough-in va	alves		MAI	P SR Ø
	Flash Freestanding Tub Filler Rough-In Valve • Brass construction • 1/2" NPT threaded inlets • Level adjustable rough • Test plugs included • Must order trim separately		R950 R950SS	N/A Screwdriver Stops	204 235

Serin

★ DISCONTINUED. Available while supplies last.



HOW TO ORDER		hoose rough-in valve with desired connection.	Fully installed Bath/Shower
	DESCRIPTION	SKU #	COLOR/FINISH LIST PRICE
	Serin Bath/Shower Trim Kit • Includes Double Ceramic pressure balance cartridge • Adjustable 3-function showerhead, 2.5 gpm/9.5 L/min maximum flow • Shower arm and flange • Brass wall escutcheon • Metal slip-on diverter tub spout	TU064502.002 TU064502.295	
	For use with Flash shower rough-in valve	s	
	Serin Shower Only Trim Kit • Includes Double Ceramic pressure balance cartridge • Adjustable 3-function showerhead, 2.5 gpm/9.5 L/min maximum flow • Shower arm and flange • Brass wall escutcheon • Metal lever handle	ADA TU064501.002 TU064501.295	
	• Wetan lever handle For use with Flash shower rough-in valves	s	
	Serin Valve Only Trim Kit • Includes Double Ceramic pressure balance cartridge • Brass wall escutcheon • Metal lever handle	TU064500.002 ADA TU064500.295	
	For use with Flash shower rough-in valve	s	MAP SR Ø
	 Serin Bath/Shower Trim Kit Includes Double Ceramic pressure balance cartridge Water-saving 4-3/4" (120 mm) 3-function showerhead, 1.75 gpm/6.6 L/min maximum flow Shower arm and flange Brass wall escutcheon Metal lever handle Metal slip-on diverter tub spout 	TU064508.002 CEO TU064508.295	
	For use with Flash shower rough-in valve	S	
	 Serin Shower Only Trim Kit Includes Double Ceramic pressure balance cartridge Water-saving 4-3/4" (120 mm) 3-function showerhead, 1.75 gpm/6.6 L/min maximum flow Shower arm and flange Brass wall escutcheon Metal lever handle 	ADA TU064507.002 TU064507.295 CEO	
	For use with Flash shower rough-in valves	s	

American Standard

HOW TO ORDER	Choose desired trim kit.	desired connection.		Fully installed Bath/Shower		
	DESCRIPTION		SKU #	C	OLOR/FINISH	LIST PRICI
	Serin Bath/Shower Trim Kit Les • Includes Double Ceramic p balance cartridge • Shower arm and flange • Brass wall escutcheon • Metal lever handle • Metal slip-on diverter tub spo • Red/Blue indicator ring	ressure	TU064502W * TU064502W		Polished Chrome Brushed Nickel	337 462
	For use with Flash shower roug	h-in valves			мар	SR Ø
	Serin Shower Only Trim Kit Less • Includes Double Ceramic p balance cartridge • Shower arm and flange • Brass wall escutcheon • Metal lever handle • Red/Blue indicator ring		TU064501W * TU064501W		Polished Chrome Brushed Nickel	298 406
	For use with Flash shower roug	h-in valves			MAP	



Bath/Shower Trim Kits and Valves

Serin®

DESCRIPTION	SKU #		LIST PRI
Flash [®] Shower Rough-In Valve With Universal Connections • 1/2" Male NPT/Sweat inlets/outlets accept 1/2" copper, 1/2" iron pipe, PEX or CPVC adapters • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU101 RU101SS	Screwdriver Stops	64 91
Flash Shower Rough-In Valve With Stub-out Connections • 1/2" Stub-out inlets/outlets accept 1/2" press-connect fittings • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU102 RU102SS	Screwdriver Stops	64 91
Flash Shower Rough-In Valve With PEX Crimp Connections • 1/2" PEX crimp inlets/Universal outlets (ASTM F1807) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU107 RU107SS	Screwdriver Stops	64 91
Flash Shower Rough-In Valve With PEX Crimp Elbow Connections • 1/2" PEX crimp elbow inlets/Universal outlets (ASTM F1807) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU107E RU107ESS	Screwdriver Stops	84 111
Flash Shower Rough-In Valve With PEX Cold Expansion Connections • 1/2" PEX cold expansion inlets/Universal outlets (ASTM F1960) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU108 RU108SS	Screwdriver Stops	64 91
Flash Shower Rough-In Valve With PEX Cold Expansion Elbow Connections • 1/2" PEX cold expansion elbow inlets/Universal outlets (ASTM F1960) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU108E RU108ESS	Screwdriver Stops	84 111
Flash Shower Rough-In Valve With CPVC Connections • 1/2" CPVC inlets/Universal outlets • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU109 RU109SS	Screwdriver Stops	84 111

 $\star\,$ When combined with Double Ceramic pressure balance cartridge.

American Standard

 DESCRIPTION		SKU #	COLOR/FINISH	LIST PRIC
Serin Pressure Balance Bath/Shower Trim Kit With Built-In Diverter • Adjustable 3-function showerhead, 2.5 gpm/9.5 L/min maximum flow • Shower arm and flange • Brass wall escutcheon with built-in diverter • Metal lever handle • Brass tub spout		T064602.002	Polished Chrome	391
For use with rough-in valve R116SS			MAP	SR Ø
Serin Pressure Balance Bath/Shower Trim Kit With Built-In Diverter Less Showerhead		* T064WDXH602.002	Polished Chrome	366
 Includes Double Ceramic pressure balance cartridge Shower arm and flange Brass wall escutcheon with built-in diverter Metal lever handle Brass tub spout Red/Blue indicator ring 				
For use with rough-in valve R116SS			MAP	SR Ø
 Temperature Control Rough-In Valve With Integral Diverter Pressure balance mixing valve cycles from "Of to "Warm" to "Hot" Integral Hot Limit Safety Stop Female thread I.P.S. inlets/outlets With screwdriver stops 47 mm ceramic disc valve cartridge with back-to-back capability Solid brass valve body with nominal 1/2" (13 mm) inlets/outlets Roughing-in depth: 1-1/2" - 3-1/4" (38 - 83 mm from center of inlet to finished wall surface Plaster guard can be used as thin-wall support 	n) measured	R116SS	NA	163
Serin Fixture-Mounted Bidet Fitting • Cast brass valve bodies • Washerless ceramic disc valve cartridges • Vacuum breaker • Metal lever handles • Metal Speed Connect [®] pop-up drain	AD CEO	2064401.002	Polished Chrome	694
			MAP	
 Serin Monoblock Bidet Fitting Cast brass spout Braided flexible hoses with 3/8" (10 mm) compression connectors Metal lever handle Metal Speed Connect pop-up drain 	(DA) CEO	2064011.002	Polished Chrome	329
			MAP	



DESCRIPTION	SKU	1#	COLOR/FINISH	LIST PRIC
 Serin 2-Handle Thermostatic Valve Trim Kit Metal wall escutcheon Metal lever handles Less valve (must be purchased separately) 		64740.002 64740.295	Polished Chrome Brushed Nickel	241 338
For use with rough-in valves R520, R522, R522S, F	R523 and R523S			AP SR Ø
 2-Handle Thermostatic Rough-In Valve With On/Off and Volume Control 1/2" (13 mm) NPT inlets/outlets 5.9 gpm/22.3 L/min at 40 psi Top handle controls On/Off and Volume 1 Function All Ceratherm[™] valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature selections Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T Requires separate diverter valve when used with more than one outlet 	* R52	20	NA	358 SR 2
 2-Handle Thermostatic Rough-In Valve With Built-In 2-Way Diverter 1/2" (13 mm) NPT inlets/outlets 6.5 gpm/24.6 L/min at 40 psi Top handle controls On/Off, Volume and Diverter functions Diverts to 2 discrete functions All Ceratherm valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature selections Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T Requires twin ell for use with diverter tub spout 	* R52	22	NA	325 SR Ø
Same as Above Diverts to 2 Discrete/1 Shared Function 	* R52	22S	NA	325 Sr Ø
 2-Handle Thermostatic Rough-In Valve With Built-in 3-Way Diverter 1/2" (13 mm) NPT inlets/outlets 6.5 gpm/24.6 L/min at 40 psi Top handle controls On/Off, Volume and Diverter functions Diverts to 3 discrete functions All Ceratherm valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature changes Adjustable temperature selections Hot Limit Safety Stop is set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T Requires twin ell for use with diverter tub spout 	* R52 CEO	23	NA	352 SR 🖉
Same as Above • Diverts to 3 Discrete/2 Shared Function	* R52	23S	NA	352 sr 0



 DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Serin Central Thermostatic Valve Trim Kit • Metal wall escutcheon • Metal lever handle • Less valve • Valve must be purchased separately • Must order with On/Off volume control to complete system	Â	* T064730.002 * T064730.295	Polished Chrome Brushed Nickel	168 236
For use with rough-in valves R510 and R530			MA	SRÌ 🖉
 Central Thermostatic Rough-In Valve 1/2" (13 mm) NPT inlets/outlets 9.5 gpm/35.9 L/min at 40 psi All Ceratherm valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature changes Adjustable temperature selections Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T Must order with On/Off volume control to complete system When used as a bath/shower a separate diverter valve is required (R422, R422S, R433, R433S or diverter tub spout) Requires twin ell for use with diverter tub spout 		* R510	N/A	381
 Central Thermostatic Rough-In Valve 3/4" (19 mm) NPT inlets/outlets 16 gpm/60.6 L/min at 40 psi All Ceratherm valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature changes; adjustable temperature selections Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T Must order with On/Off volume control to complete system When used as a bath/shower a separate diverter valve is required (R422, R422S, R433, R433S or diverter tub spout) Requires twin ell for use with diverter tub spout 		* R530	N/A	436 SR Ø
 control to complete system When used as a bath/shower a separate diverter valve is required (R422, R422S, R433, R433S or diverter tub spout) 				S



Bath/Shower Trim Kits and Valves

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRIC
	Serin On/Off Volume Control Valve Trim Kit • Metal lever handle • Less valve (must be purchased separately)	ADA	T064700.002 T064700.295	Polished Chrome Brushed Nickel	79 112
	For use with rough-in valves R701 and R711			MAI	SR 0
	 1/2" (13 mm) On/Off Volume Control Rough-In Valve 1/2" (13 mm) inlet/outlet 		R701	N/A	69
					SR Ø
	 3/4" (19 mm) On/Off Volume Control Rough-In Valve 3/4" (19 mm) inlet/outlet 		R711	N/A	105
	Serin Diverter Valve Trim Kit • Metal lever handle • Less valve (must be purchased separately)	Â	T064430.002 T064430.295	Polished Chrome Brushed Nickel	106 148
	For use with rough-in valves R422, R422S, R433 a	and R433S		MAI) îr 🖉
	 2-Way In-Wall Diverter Rough-In Valve Controls water flow between 2 outlets (shower or sprays) 2 Discrete functions 	CEO	R422	N/A	205 Sr Ø
	Same as Above Diverts to 2 Discrete/1 Shared function 		R422S	N/A	205 (SR)
	 3-Way In-Wall Diverter Rough-In Valve Controls water flow between 3 outlets (shower or sprays) 3 Discrete functions 	CEO	R433	NA	232


Serin


American Standard

Serin[®]

Serin Thermostatic Bath/Shower System

Serin Thermostatic Shower System

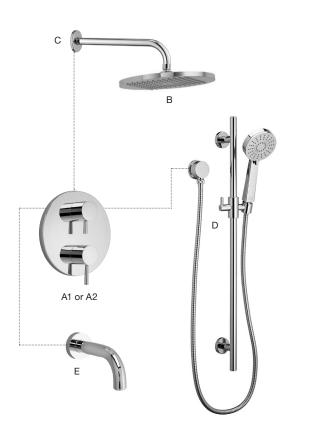

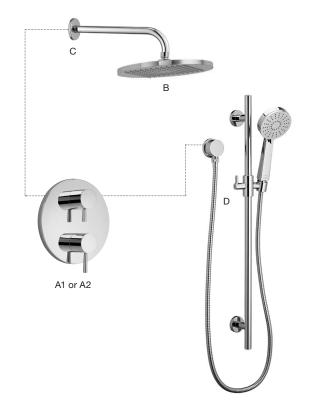

Serin Thermostatic Bath/Shower System

				LIST PRICE FOR SYSTEM
	DESCRIPTION	QTY	SKU #	002
Α	Serin 2-Handle Thermostatic Valve Trim Kit	1	T064740	241
В	10" Modern Rain Showerhead	1	1660683	262
С	12" Wall-Mount Right Angle Shower Arm	1	1660194	89
D	3-Function Modern Slide Bar Kit	1	1662647	277
Е	Serin® Tub Spout	1	8888421	118
equir	ed Components (not shown)			
1	2-Handle Thermostatic Rough-In Valve With Built-In 3-Way Diverter - Non-Shared Function	1	R523	352
OR	(Choose R523 or R523S)			
2	2-Handle Thermostatic Rough-In Valve With Built-In 3-Way Diverter - Shared Function	1	R523S	352
	Bath/S	hower S	System Total	1,339
erin	Thermostatic Shower System		-	
				LIST PRICE FOR SYSTEM
	DESCRIPTION	οτν	CVII #	000

				LIST PRICE FOR SYSTEM
	DESCRIPTION	QTY	SKU #	002
А	Serin 2-Handle Thermostatic Valve Trim Kit	1	T064740	241
в	10" Modern Rain Showerhead	1	1660683	262
С	12" Wall-Mount Right Angle Shower Arm	1	1660194	89
D	3-Function Modern Slide Bar Kit	1	1662647	277
Requi	red Components (not shown)			
1	2-Handle Thermostatic Rough-In Valve With Built-In 2-Way Diverter - Non-Shared Function	1	R522	325
OR	(Choose R522 or R522S)			
0R 2	(Choose R522 or R522S) 2-Handle Thermostatic Rough-In Valve With Built-In 2-Way Diverter – Shared Function	1	R5232	325

Shower System Total

American Standard

Accessories

 DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
CR Series 18" Towel Bar • Brass bar • All metal construction • Concealed mounting	8336018.002 8336018.295	Polished Chrome Brushed Nickel	58 82
CR Series 24" Towel Bar • Brass bar • All metal construction • Concealed mounting	8336024.002 8336024.295	Polished Chrome Brushed Nickel	62 86
CR Series Towel Ring • 7" (178 mm) diameter ring • All metal construction • Concealed mounting	8336190.002 8336190.295	Polished Chrome Brushed Nickel	36 50
CR Series Double Robe Hook • All metal construction • Concealed mounting	8334210.002 8334210.295	Polished Chrome Brushed Nickel	27 38 9 SR Ø
CR Series Toilet Paper Holder • All metal construction • Concealed mounting	8334230.002 8334230.295	Polished Chrome Brushed Nickel	47 67


American Standard

The urban-inspired **Studio S Collection** is defined by soft contours, superior performance, and lasting durability. It's the perfect fusion of style and function for today's modern bathroom.



American Standard

Bathroom Faucets

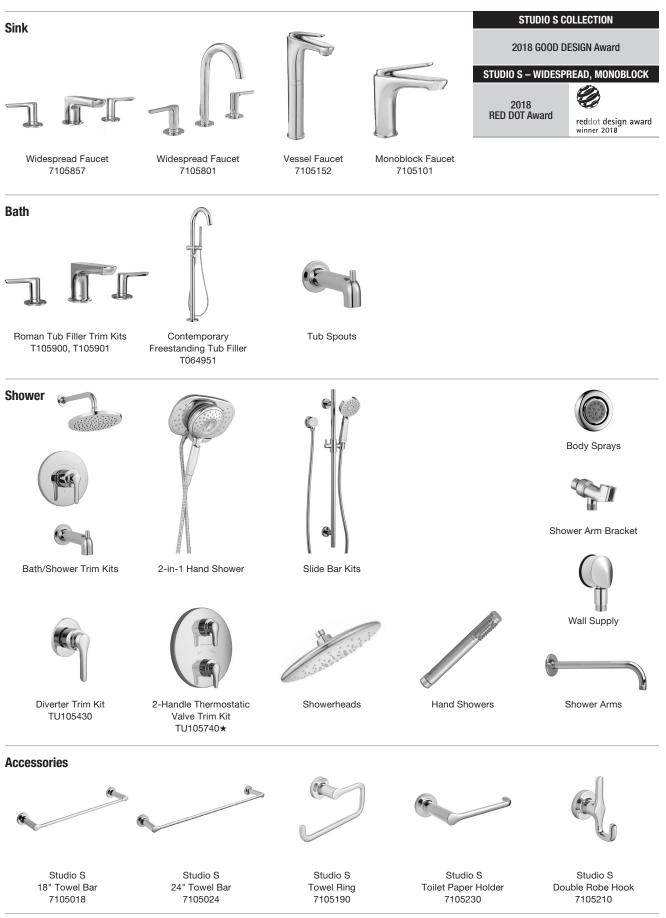



★ DISCONTINUED. Available while supplies last.

		DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
J	Centred by UMPRO RAT	 Studio S Widespread Faucet Brass construction and washerless ceramic disc valve cartridges Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Valve bodies with integrated flexible hose connections for 6" – 12" (152 – 305 mm) installations Metal lever handles Brass push pop-up drain 	ADA CEO		Polished Chrome Brushed Nickel Matte Black O S COLLECTION rds List on page 457.	441 617 661
	Control of the contro	 Studio S Widespread Faucet Brass construction and washerless ceramic disc valve cartridges Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Valve bodies with integrated flexible hose connections for 6" – 12" (152 – 305 mm) installations Metal knob handles Brass push pop-up drain 	CEO	7105877.002 7105877.295 7105877.243	Polished Chrome Brushed Nickel Matte Black	441 617 661
7.	Cettered by Invo Bat	 Studio S Widespread Faucet Brass construction and washerless ceramic disc valve cartridges Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Valve bodies with integrated flexible hose connections for 6" – 12" (152 – 305 mm) installations Metal lever handles Metal Speed Connect[®] pop-up drain 	CEO	7105801.002 7105801.295 7105801.243	Polished Chrome Brushed Nickel Matte Black	441 617 661
	Centred by United States	 Studio S Widespread Faucet Brass construction and washerless ceramic disc valve cartridges Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Valve bodies with integrated flexible hose connections for 6" – 12" (152 – 305 mm) installations Metal knob handles Metal Speed Connect pop-up drain 	CEO	7105821.002 7105821.295 7105821.243	Polished Chrome Brushed Nickel Matte Black	441 617 661

American Standard

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Control of the other	 Studio S Monoblock Faucet Brass construction and washerless ceramic disc valve cartridges Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Braided flexible hoses with 3/8" (10 mm) compression connectors Metal lever handle Metal Speed Connect® pop-up drain 	Â		Polished Chrome Brushed Nickel Matte Black O S COLLECTION ds List on page 457.	306 428 458
	Studio S Single Control Vessel Faucet • Brass construction and washerless ceramic disc valve cartridges • Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator • Adjustable Hot Limit Safety Stop • Braided flexible hoses with 3/8" (10 mm) compression connectors • Red/Blue index buttons included • Metal lever handle • Grid drain	Â	7105152.002 7105152.295 7105152.243	Polished Chrome Brushed Nickel Matte Black	SR Ø 368 516 551
	Escutcheon Plate • For use with 7105101 • Putty plate included		2064101P.002 2064101P.295 2064101P.243	Polished Chrome Brushed Nickel Matte Black	F SR Ø 40 56 60 SR Ø

American Standard

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
1 Fr/	 Studio S Roman Tub Filler Trim Kit With Personal Shower Brass construction All personal showers feature 5' (152 cm) long hose Metal lever handles Personal shower with 1.8 gpm/6.8 L/min maximum flow 	CEO		Polished Chrome Brushed Nickel Matte Black D S COLLECTION ds List on page 457.	551 772 827
	For use with Flash® roman tub filler rough-in valve R	910		MA	P SR Ø
	Studio S Roman Tub Filler Trim Kit • Brass construction • Metal lever handles • Less personal shower	Â	T105900.002 T105900.295 T105900.243	Polished Chrome Brushed Nickel Matte Black	386 540 579
	For use with Flash roman tub filler rough-in valve RS	00		MA	P SR Ø
	 Flash Roman Tub Filler Rough-In Valve With Personal Shower Brass construction and washerless 1/4 turn ceramic disc valve cartridges 1/2" copper inlets Connections to spout can be made via flexible hoses (provided) or 1/2" copper sweat connections 14 gpm/52.9 L/min maximum flow rate at 40 psi 8" - 16" (203 - 406 mm) flexible installation Adjustable rough-in: 2-1/2" (64 mm) maximum deck thickness Includes hand shower rough-in 		R910	N/A	286
	 Flash Roman Tub Filler Rough-In Valve Brass construction and washerless 1/4 turn ceramic disc valve cartridges 1/2" copper inlets Connections to spout can be made via flexible hoses (provided) or 1/2" copper sweat connections 14 gpm/52.9 L/min maximum flow rate at 40 psi 8" – 16" (203 – 406 mm) flexible installation Adjustable rough-in: 2-1/2" (64 mm) maximum deck thickness 		R900	N/A	163

American Standard

Sink and Bath Faucets

Studio[®] S

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
	Contemporary Round Freestanding Tub Filler With Personal Shower • Brass construction and washerless 1/4 turn ceramic disc valve cartridge • Personal shower features 59" (150 cm) long hose with 1.8 gpm/6.8 L/min maximum flow • Metal lever handle • Overall height: 44-3/4" (1137 mm) • Spout reach: 11-1/4" (286 mm) • Metal hand shower • Shower bracket pivots 60°	(Å) CEO	T064951.002 T064951.295 T064951.243	Polished Chrome Brushed Nickel Matte Black	1,076 1,507 1,614
F	For use with Flash® freestanding tub filler rough-ir	n valves		MA	P SR Ø
	Flash		R950	N/A	204



Flash Tub Filler Rough-in Valve	R950 R950SS	N/A Screwdriver Stops	204 235
 Brass construction 1/2" NPT threaded inlets Level adjustable rough Test plugs included Must order trim separately 			

American Standard

Bath/Shower Trim Kits and Valves

HOW TO ORDER	des	se rough-in valu sired connection	n.	Fully installed Bath/Sh	nower
	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
	 Studio S Bath/Shower Trim Kit Includes Double Ceramic pressure balance cartridge 8" (200 mm) rain showerhead, 2.5 gpm/9.5 L/min maximum flow 12" (300 mm) shower arm and flange Brass wall escutcheon Metal lever handle Metal slip-on diverter tub spout 	ce		Polished Chrome Brushed Nickel Matte Black D S COLLECTION ds List on page 457.	342 467 501
	For use with Flash shower rough-in valves			MA	NP SR Ø
	 Studio S Shower Only Trim Kit Includes Double Ceramic pressure balance cartridge 8" (200 mm) rain showerhead, 2.5 gpm/9.5 L/min maximum flow 12" (300 mm) shower arm and flange Brass wall escutcheon Metal lever handle 	ADA ce	TU105501.002 TU105501.295 TU105501.243	Polished Chrome Brushed Nickel Matte Black	304 416 446
Fal	For use with Flash shower rough-in valves			MAR	₽₽ SR Ø
JE 4	 Studio S Valve Only Trim Kit Includes Double Ceramic pressure balance cartridge Brass wall escutcheon Metal lever handle For use with Flash shower rough-in valves 	ADA ce	TU105500.002 TU105500.295 TU105500.243	Polished Chrome Brushed Nickel Matte Black	226 304 325
	 Studio S Bath/Shower Trim Kit Includes Double Ceramic pressure balance cartridge Water-saving 8" (200 mm) rain showerhead, 1.8 gpm/6.8 L/min maximum flow 12" (305 mm) shower arm and flange Brass wall escutcheon Metal lever handle Slip-on diverter tub spout 		TU105508.002 TU105508.295 TU105508.243	Polished Chrome Brushed Nickel Matte Black	342 467 501
CE -	For use with Flash shower rough-in valves			MA	IP SR Ø
	 Studio S Shower Only Trim Kit Includes Double Ceramic pressure balance cartridge Water-saving 8" (200 mm) 3-function rain showerhead, 1.8 gpm/6.8 L/min maximum f 12" (305 mm) shower arm and flange Metal wall escutcheon Metal lever handle 	CEO	TU105507.002 TU105507.295 TU105507.243	Polished Chrome Brushed Nickel Matte Black	304 416 446
P	For use with Flash shower rough-in valves			MAZ	₽ SR Ø

Studio S



Bath/Shower Trim Kits and Valves

Studio	[®] S
--------	----------------

SKU #		
RU101 RU101SS		64 91
RU102 RU102SS		64 91
RU107		64
RU107SS	SS Screwdriver Stops	³ 91
RU107E	Έ	84
RU107ESS	ESS Screwdriver Stops	5 111
RU108		64
RU108SS	SS Screwdriver Stops	
RU108E		84
RU108ESS	ESS Screwdriver Stops	5 111
RU109 RU109SS		84 3 111

* When combined with Double Ceramic pressure balance cartridge.


DESCRIPTION	SKU	# COLOR/FIN	IISH LIST PRICE
 Studio S 2-Handle Thermostatic Valve Trim Kit Brass wall escutcheon Metal handles Less valve (must be purchased separately) 	ADA * T10: * T10:	5740.002 Polished 5740.295 Brushed 5740.243 Matte Bla STUDIO S COLLECTION See Awards List on page	Nickel 333 Ick 359
			Sn 2
 2-Handle Thermostatic Rough-In Valve With On/Off And Volume Control 1 Function Top handle controls On/Off and Volume Bottom handle controls Temperature Ceratherm[®] thermostat maintains constant shower temperature by adjusting to water supply pressure and temperature 1/2" (13 mm) NPT inlets/outlets Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions 5.9 gpm/22.3 L/min at 40 psi 	* R52	0 N/A	358
 Meets ASSE Standard 1016 – Type T 			SR Ø
 2-Handle Thermostatic Rough-In Valve With Built-in 2-Way Diverter Diverts to 2 discrete functions Top handle controls On/Off, Volume and Diverter functions Bottom handle controls Temperature Ceratherm thermostat maintains constant shower temperature by adjusting to water supply pressure and temperature 1/2" (13 mm) NPT inlets/outlets Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions 6.5 gpm/24.6 L/min at 40 psi Meets ASSE Standard 1016 – Type T Requires twin ell for use with diverter tub spout 	* R52 CEO	2 N/A	325 (sr)
Same as Above Diverts to 2 Discrete/1 Shared Function 	* R52	2 S N/A	325 Sr Ø
 2-Handle Thermostatic Rough-In Valve With Built-in 3-Way Diverter Diverts to 3 discrete functions Top handle controls On/Off, Volume and Diverter functions Bottom handle controls Temperature Ceratherm thermostat maintains constant shower temperature by adjusting to water supply pressure and temperature 1/2" (13 mm) NPT inlets/outlets Hot Limit Safety Stop is set to a maximum of 112°F (44°C) with interim stops for local conditions 6.5 gpm/24.6 L/min at 40 psi Meets ASSE Standard 1016 – Type T Requires twin ell for use with diverter tub spout 	* R52 CEO	3 N/A	352 (\$r)
Same as Above	* R52	3S N/A	352
• Diverts to 3 Discrete/2 Shared Functions			




	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
and the second s	Studio S Diverter Valve Trim Kit • Metal lever handle • Less valve • Valve must be purchased separately	Â	T105430.002 T105430.295 T105430.243	Polished Chrome Brushed Nickel Matte Black	105 147 160
Call	• Valve must be purchased separately			NO S COLLECTION	
U U	For use with rough-in valves R422, R422S, R43	3 and R433S		MA	P 🖻 🖉
	 2-Way In-Wall Diverter Rough-In Valve Controls water flow between 2 outlets (shower or sprays) 2 Discrete functions 	CEO	R422	N/A	205 (SR)
	Same as Above Diverts to 2 Discrete/1 Shared function 		R422S	NA	205 (sr)
	 3-Way In-Wall Diverter Rough-In Valve Controls water flow between 3 outlets (shower or sprays) 3 Discrete functions 	CEO	R433	NA	232
	Same as Above Diverts to 3 Discrete/3 Shared functions 		R433S	NA	232 [SR] Ø

American Standard

Studio S Thermostatic Bath/Shower System

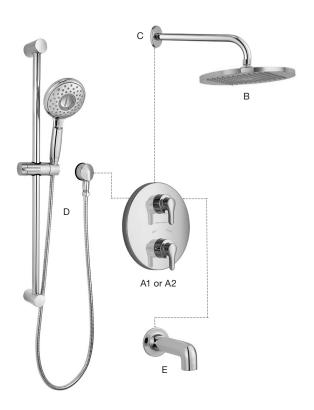

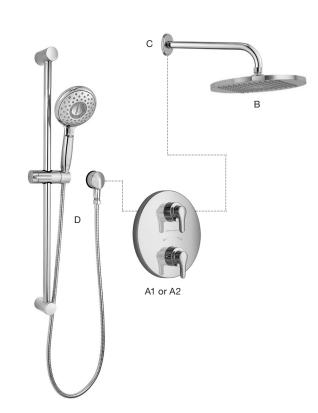

Studio S Thermostatic Shower System

Studio S Thermostatic Bath/Shower System

12" Wall-Mount Right Angle Shower Arm

Spectra Handheld Slide Bar Kit

				LIST PRICE	FOR SYSTEM
	DESCRIPTION	QTY	SKU #	002	295
А	Studio S 2-Handle Thermostatic Valve Trim Kit	1	T105740	238	333
В	10" Modern Rain Showerhead	1	1660683	262	393
С	12" Wall-Mount Right Angle Shower Arm	1	1660194	89	134
D	Spectra Handheld® Slide Bar Kit	1	1660775	219	296
Е	Studio S Tub Spout	1	8888316	83	116
	red Components (not shown)	4	DE00	2	
1 2-Handle Thermostatic Rough-In Valve With Built-In 3-Way Diverter – Non-Shared Function 1 R523 352 0R (Choose R523 or R523S)				52	
2	2-Handle Thermostatic Rough-In Valve With Built-In 3-Way Diverter – Shared Function	1	R523S	352	
	Bath/Si	nower (System Total	1,243	1,624
Studi	o S Thermostatic Shower System				
				LIST PRICE	FOR SYSTEM
	DESCRIPTION	QTY	SKU #	002	295
Α	Studio S 2-Handle Thermostatic Valve Trim Kit	1	T105740	238	333
в	10" Modern Rain Showerhead	1	1660683	262	393

Studio S

С

D

Requi	red Components (not shown)			
1	2-Handle Thermostatic Rough-In Valve With Built-In 2-Way Diverter - Non-Shared Function	1	R522	325
OR	(Choose R522 or R522S)			
2	2-Handle Thermostatic Rough-In Valve With Built-In 2-Way Diverter - Shared Function	1	R522S	325

Shower System Total

1

1

1660194

1660775

89

219

134

296

Studio[®] S

Accessories

	DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
(C)	Studio S 18" Towel Bar • Brass bar • All metal construction • Concealed mounting	7105018.002 7105018.295 7105018.243 STUDI	Polished Chrome Brushed Nickel Matte Black O S COLLECTION	57 80 88
		See Awar	ds List on page 457.) (SR (2)
C C	Studio S 24" Towel Bar • Brass bar • All metal construction • Concealed mounting	7105024.002 7105024.295 7105024.243	Polished Chrome Brushed Nickel Matte Black	60 85 94
	Studio S 24" Double Towel Bar • All metal construction • Concealed mounting	7105224.002 7105224.295 7105224.243	Polished Chrome Brushed Nickel Matte Black	121 170 182
	Studio S	7105190.002	Polished Chrome) (SR) (2) 36
	 Towel Ring All metal construction Concealed mounting 	7105190.295 7105190.243	Brushed Nickel Matte Black	50 55
	Studio S Double Robe Hook • All metal construction • Concealed mounting	7105210.002 7105210.295 7105210.243	Polished Chrome Brushed Nickel Matte Black	27 38 41
			MA) (SR) 🖉
16	Studio S Toilet Paper Holder • All metal construction • Concealed mounting	7105230.002 7105230.295 7105230.243	Polished Chrome Brushed Nickel Matte Black	46 65 72

American Standard


The minimalist lines of the **Times Square Collection** create maximum impact in a modern bathroom. Architecturally inspired in every detail, it is a work of art designed to endure.



American Standard

Times Square[®]

Bathroom Faucets

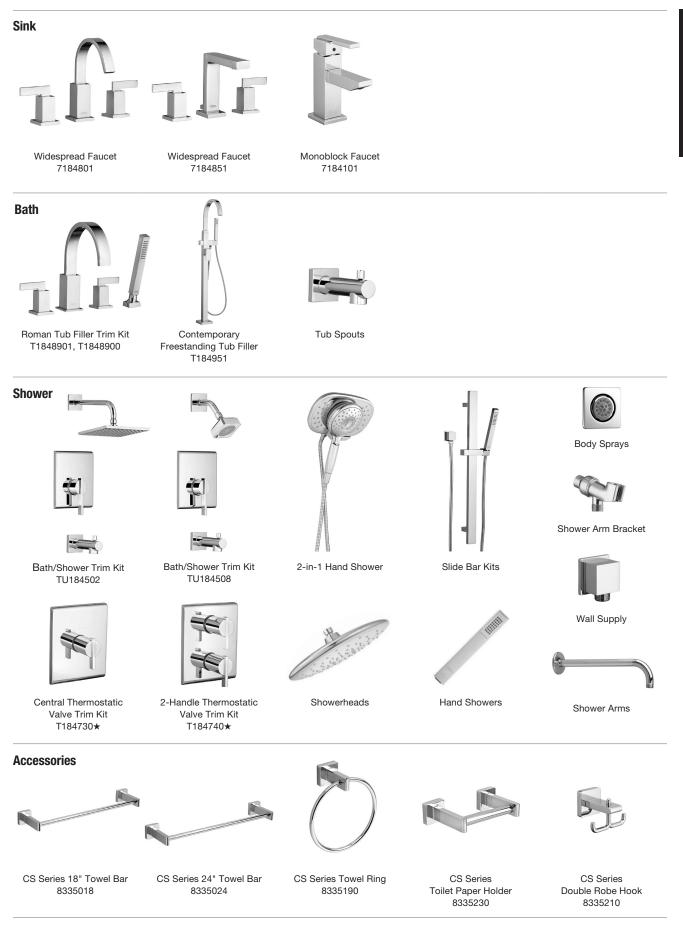

★ DISCONTINUED. Available while supplies last.

Sink and Bath Faucets

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
	 Times Square Widespread Faucet Brass construction and washerless 1/4 turn drip-free ceramic disc valve cartridges Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Valve bodies with integrated flexible hose connections for 6" – 12" (152 – 305 mm) installations Metal Speed Connect® pop-up drain 	(Å) CEO	7184801.002 7184801.295	Polished Chrome Brushed Nickel	447 626
				MAF	y (sr) 🖉
Certified by UMM RST	 Times Square Widespread Faucet Brass construction and washerless 1/4 turn drip-free ceramic disc valve cartridges Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Valve bodies with integrated flexible hose connections for 6" – 12" (152 – 305 mm) installations Metal Speed Connect pop-up drain 	ADA CEO	7184851.002 7184851.295	Polished Chrome Brushed Nickel	447 626
				MAF) îr 🖉
WHO NOT	 Times Square Monoblock Faucet Brass construction and washerless drip-free ceramic disc valve cartridges Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Braided flexible hoses with 3/8" compression connectors Red/Blue index buttons and finish-matched index buttons included Metal Speed Connect pop-up drain 	(A) CEO	7184101.002 7184101.295	Polished Chrome Brushed Nickel	267 373
	Times Square Monoblock Faucet • Same as 7184101 • Less drain • 1.2 gpm/4.5 L/min laminar	ÂDA CEO	* 7184101M1.002	Polished Chrome	243
				MAF	SR Ø
	Escutcheon PlateFor use with 7184101		7184101P.002 7184101P.295	Polished Chrome Brushed Nickel	43 60
				~	



Sink and Bath Faucets

DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Times Square Roman Tub Filler Trim Kit With Personal Shower • Brass construction • All personal showers feature 5' (152 cm) long hose • Metal lever handles • Personal shower with 1.8 gpm/6.8 L/min maximum flow	CEO	T184901.002 T184901.295	Polished Chrome Brushed Nickel	772 1,080
For use with Flash [®] roman tub filler rough-in valve	R910		MAI	SR Ø
Times Square Roman Tub Filler Trim Kit • Brass construction • Metal lever handles • Less personal shower	(Å)	★ T184900.002 ★ T184900.295	Polished Chrome Brushed Nickel	607 849
For use with Flash roman tub filler rough-in valve F	1900		MA	SR Ø
 Flash Roman Tub Filler Rough-in Valve With Personal Shower Brass construction and washerless 1/4 turn ceramic disc valve cartridges 1/2" copper inlets Connections to spout can be made via flexible hoses (provided) or 1/2" copper sweat connections 14 gpm/52.9 L/min maximum flow rate at 40 psi 8" - 16" (203 - 406 mm) flexible installation Adjustable rough-in: 2-1/2" (64 mm) maximum deck thickness Includes hand shower rough-in 		R910	N/A	286
 Flash Brass construction and washerless 1/4 turn ceramic disc valve cartridges 1/2" copper inlets Connections to spout can be made via flexible hoses (provided) or 1/2" copper sweat connections 14 gpm/52.9 L/min maximum flow rate at 40 psi 8" - 16" (203 - 406 mm) flexible installation Adjustable rough-in: 2-1/2" (64 mm) maximum deck thickness 		R900	N/A	163

American Standard

Sink and Bath Faucets

DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
Contemporary Square Freestanding Tub Filler With Personal Shower	T184951.002 T184951.295	Polished Chrome Brushed Nickel	1,128 1,579
 Brass construction 1/4 turn washerless ceramic disc valve cartridge Personal shower features 59" (150 cm) long hose with 1.8 gpm/6.8 L/min maximum flow Metal lever handle Overall height: 44-3/4" (1137 mm) Spout reach: 11-1/4" (286 mm) Level adjustable rough Metal hand shower Shower bracket pivots 60° 			
For use with Flash® freestanding tub filler rough-in valves		MAI	5 🗊 🖉
Flash Freestanding Tub Filler Rough-in Valve • Brass construction • 1/2" NPT threaded inlets • Level adjustable rough • Test plugs included • Must order trim separately	R950 R950SS	N/A Screwdriver Stops	204 235

Test plugs included
Must order trim separately



	Choose desired trim kit.	Choose rough-in va desired connection		Fully installed Bath/Sh	ower
HOW TO ORDER	Trim kit with cartridge	lash® Shower Rough			
	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRIC
	Times Square Bath/Shower Trim Kit Includes Double Ceramic pressure balance cartridge 7-13/16" (199 mm) rain showerhead, 2.5 gpm/9.5 L/min maximum flow 12" (300 mm) brass shower arm Brass wall escutcheon Metal lever handle Metal slip-on diverter tub spout		TU184502.002 * TU184502.295	Polished Chrome Brushed Nickel	405 556
	For use with Flash shower rough-in val	ves		MA	P SR Ø
	Times Square Shower Only Trim Kit • Includes Double Ceramic pressure balance cartridge • 7-13/16" (199 mm) rain showerhead, 2.5 gpm/9.5 L/min maximum flow • 12" (300 mm) brass shower arm • Brass wall escutcheon • Metal lever handle		TU184501.002 TU184501.295	Polished Chrome Brushed Nickel	363 497
	For use with Flash shower rough-in val	ves		MA	P <u>S</u> R 🖉
	Times Square Valve Only Trim Kit • Includes Double Ceramic pressure balance cartridge • Brass wall escutcheon • Metal lever handle For use with Flash shower rough-in value		TU184500.002 TU184500.295	Polished Chrome Brushed Nickel	272 370
	 Times Square Bath/Shower Trim Kit Includes Double Ceramic pressure balance cartridge Water-saving 3-1/4" (80 mm) 2-funct showerhead, 1.75 gpm/6.6 L/min ma Shower arm and flange Brass wall escutcheon Metal lever handle Metal slip-on diverter tub spout 	ion	TU184508.002 * TU184508.295	Polished Chrome Brushed Nickel	405 556
	For use with Flash shower rough-in val	ves		MA	P 🕅 🖉
	 Times Square Shower Only Trim Kit Includes Double Ceramic pressure balance cartridge Water-saving 3-1/4" (80 mm) 2-funct showerhead, 1.75 gpm/6.6 L/min ma Shower arm and flange Brass wall escutcheon Metal lever handle Metal slip-on diverter tub spout 	CEO ion	TU184507.002 * TU184507.295	Polished Chrome Brushed Nickel	363 497
					~ ^ _



Bath/Shower Trim Kits and Valves

	DESCRIPTION	SKU #		LIST PRIC
	Flash [®] Shower Rough-In Valve With Universal Connections • 1/2" Male NPT/Sweat inlets/outlets accept 1/2" copper, 1/2" iron pipe, PEX or CPVC adapters • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim	RU101 RU101SS	Screwdriver Stops	64 91
	For use with TU series pressure balance bath/shower trim kits Flash Shower Rough-In Valve With Stub-out Connections	RU102 RU102SS	Screwdriver Stops	64 91
	Flash Shower Rough-In Valve With PEX Crimp Connections • 1/2" PEX crimp inlets/Universal outlets (ASTM F1807) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU107 RU107SS	Screwdriver Stops	64 91
F	Flash Shower Rough-In Valve With PEX Crimp Elbow Connections • 1/2" PEX crimp elbow inlets/Universal outlets (ASTM F1807) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU107E RU107ESS	Screwdriver Stops	84 111
	Flash Shower Rough-In Valve With PEX Cold Expansion Connections • 1/2" PEX cold expansion inlets/Universal outlets (ASTM F1960) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU108 RU108SS	Screwdriver Stops	64 91
	Flash Shower Rough-In Valve With PEX Cold Expansion Elbow Connections • 1/2" PEX cold expansion elbow inlets/Universal outlets (ASTM F1960) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU108E RU108ESS	Screwdriver Stops	84 111
	Flash Shower Rough-In Valve With CPVC Connections • 1/2" CPVC inlets/Universal outlets • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU109 RU109SS	Screwdriver Stops	84 111

* When combined with Double Ceramic pressure balance cartridge.

American Standard

DESCRIPTION	SKU #	COLOR/FINISH	LIST PRIC
Times Square 2-Handle Thermostatic Valve Trim Kit • Metal wall escutcheon • Metal lever handles • Less valve • Valve must be purchased separately	* T184740.002 * T184740.295	Polished Chrome Brushed Nickel	241 338
For use with rough-in valves R520, R522, R522S, F	1523 and R523S		
 2-Handle Thermostatic Rough-in Valve With On/Off and Volume Control 1 Function Top handle controls On/Off and Volume Bottom handle controls Temperature Ceratherm[®] thermostat maintains constant shower temperature by adjusting to water supply pressure and temperature 1/2" (13 mm) NPT inlets/outlets Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions 5.9 gpm/22.3 L/min at 40 psi 	* R520	N/A	358
Meets ASSE Standard 1016 – Type T			Ísrì 🧕
 2-Handle Thermostatic Rough-in Valve With Built-in 2-Way Diverter Diverts to 2 discrete functions Top handle controls On/Off, Volume and Diverter functions Bottom handle controls Temperature Ceratherm thermostat maintains constant shower temperature by adjusting to water supply pressure and temperature 1/2" (13 mm) NPT inlets/outlets Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions 6.5 gpm/24.6 L/min at 40 psi Meets ASSE Standard 1016 – Type T Requires twin ell for use with diverter tub spout 	* R522 CEO	N/A	325 SR 2
Same as Above • Diverts to 2 Discrete/1 Shared Function	* R522S	N/A	325 Sr 0
 2-Handle Thermostatic Rough-in Valve With Built-in 3-Way Diverter Diverts to 3 discrete functions Top handle controls On/Off, Volume and Diverter functions Bottom handle controls Temperature Ceratherm thermostat maintains constant shower temperature by adjusting to water supply pressure and temperature 1/2" (13 mm) NPT inlets/outlets Hot Limit Safety Stop is set to a maximum of 112°F (44°C) with interim stops for local conditions 6.5 gpm/24.6 L/min at 40 psi Meets ASSE Standard 1016 – Type T Requires twin ell for use with diverter tub spout 	* R523 CEO	N/A	352 (SR)
2	* R523S	N1/A	250
Same as Above	* กอีรออ	N/A	352



DESCRIPTION		SKU #	COLOR/FINISH	LIST PRIC
 Times Square Central Thermostatic Valve Trim Kit Metal lever handle Less valve (must be purchased separately) Must order with On/Off volume control to complete system 	Â	* T184730.002 * T184730.295	Polished Chrome Brushed Nickel	168 236
For use with rough-in valves R510 and R530			МАР	SR Ø
 Central Thermostatic Rough Valve Body 1/2" (13 mm) NPT inlets/outlets 9.5 gpm/35.9 L/min at 40 psi All Ceratherm[®] valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature changes Adjustable temperature selections Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T Must order with On/Off volume control to complete system When used as a bath/shower a separate diverter valve is required (R422, R422S, R433, R433S or diverter tub spout) Requires twin ell for use with diverter tub spout 		* R510	N/A	381 SR 2
 Central Thermostatic Rough Valve Body 3/4" (19 mm) NPT inlets/outlets 16 gpm/60.6 L/min at 40 psi All Ceratherm valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature changes; adjustable temperature selections Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T Must order with On/Off volume control to complete system When used as a bath/shower a separate diverter valve is required (R422, R422S, R433, R433S or diverter tub spout) Requires twin ell for use with diverter tub spout 		* R530	N/A	436



American Standard

Bath/Shower Trim Kits and Valves


Times Square[®]


DESCRIPTION		SKU #	COLOR/FINISH	LIST PRIC
Times Square On/Off Volume Control Valve Trim Kit • Metal lever handle • Less valve • Valve must be purchased separately	(Å)	T184700.002 T184700.295	Polished Chrome Brushed Nickel	78 109
For use with rough-in valves R701 and R711			MA	P SR 0
 1/2" (13 mm) On/Off Volume Control Rough-in Valve 1/2" (13 mm) inlet/outlet 		R701	N/A	69
				SR Ø
 3/4" (19 mm) On/Off Volume Control Rough-in Valve 3/4" (19 mm) inlet/outlet 		R711	N/A	105
				SR 0
Times Square Diverter Valve Trim Kit • Metal lever handle • Less valve • Valve must be purchased separately	Â	T184430.002 T184430.295	Polished Chrome Brushed Nickel	103 144
For use with R422, R422S, R433 and R433S			MA	P SR Ø
 2-Way In-Wall Diverter Valve Controls water flow between 2 outlets (shower or sprays) 2 Discrete functions 	CEO	R422	N/A	205
Same as Above Diverts to 2 Discrete/1 Shared function		R422S	NA	205
				Ísrì 🖉
 3-Way In-Wall Diverter Valve Controls water flow between 3 outlets (shower or sprays) 3 Discrete functions 	CEO	R433	NA	232
Same as Above Diverts to 3 Discrete/3 Shared functions 		R433S	NA	232

Times Square

Shower Systems



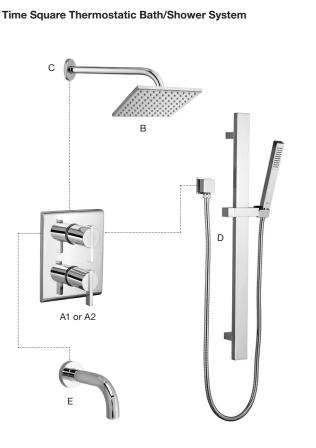

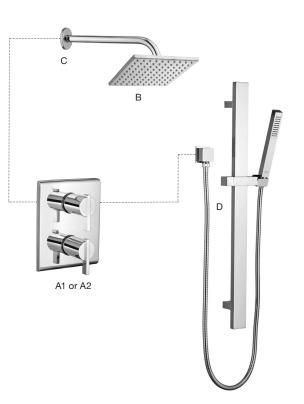

Time Square Thermostatic Shower System

Time Square Thermostatic Bath/Shower System

				LIST PRICE FOR SYSTEM	
	DESCRIPTION	QTY	SKU #	002	295
А	Time Square 2-Handle Thermostatic Valve Trim Kit	1	T184740	241	338
В	8" Square Rain Showerhead	1	1660688	206	288
С	12" Wall-Mount Right Angle Shower Arm	1	1660194	89	134
D	Time Square Slide Bar Kit		1662184	350	489
Е	Serin® Tub Spout	1	8888421	118	165
1 OR	2-Handle Thermostatic Rough-In Valve With Built-In 3-Way Diverter – Non-Shared Function (Choose R523 or R523S)	1	R523	3	52
OR					
2	2-Handle Thermostatic Rough-In Valve With Built-In 3-Way Diverter - Shared Function	1	R523S	352	
	Bath/Si	howers	System Total	1,356	1,766
ime	Square Thermostatic Shower System		-		
				LIST PRICE	FOR SYSTEM
	DESCRIPTION	QTY	SKU #	002	295
A	Time Square 2-Handle Thermostatic Valve Trim Kit	1	T184740	241	338
-					

в 1660688 206 288 8" Square Rain Showerhead 1 С 12" Wall-Mount Right Angle Shower Arm 134 1 1660194 89 D Time Square Slide Bar Kit 1 1662184 350 489 **Required Components (not shown)** 1 2-Handle Thermostatic Rough-In Valve With Built-In 2-Way Diverter - Non-Shared Function 1 R522 325

0R (Choose R522 or R522S)

2 2-Handle Thermostatic Rough-In Valve With Built-In 2-Way Diverter – Shared Function 1 R522S

Shower System Total

American Standard

Accessories

 DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
CS Series – Contemporary Square 18" Towel Bar • Brass bar • All metal construction • Concealed mounting	8335018.002 8335018.295	Polished Chrome Brushed Nickel	58 82
CS Series – Contemporary Square 24" Towel Bar • Brass bar • All metal construction • Concealed mounting	8335024.002 8335024.295	Polished Chrome Brushed Nickel	62 86
CS Series – Contemporary Square Towel Ring • 7" (178 mm) diameter ring • All metal construction • Concealed mounting	8335190.002 8335190.295	Polished Chrome Brushed Nickel	36 50
		МАР	SRÌ Q
CS Series – Contemporary Square Double Robe Hook • All metal construction • Concealed mounting	8335210.002 8335210.295	Polished Chrome Brushed Nickel	27 38
		MAP	SR Ø
CS Series – Contemporary Square Toilet Paper Holder • All metal construction • Concealed mounting	8335230.002 8335230.295	Polished Chrome Brushed Nickel	47 67
		MAP	SR Ø

Times Square

Bathroom Faucets

Add an element of design drama to your bathroom with the **Town Square S Collection**. Rich, architectural lines reflect traditional elegance, superior craftsmanship, and lasting beauty.



American Standard

Sink



Widespread Faucet 7455807801



Monoblock Faucet 7455107



Wall Mount Faucet 7455451

Bath



Roman Tub Fillers

T455900, T455901



T455951



Tub Spouts



Shower





E

Bath/Shower Trim Kits



2-Handle Thermostatic Valve Trim Kit T455740★

2-in-1 Hand Shower



Diverter Valve Trim Kit T455430



Slide Bar Kits

Fixed Showerhead 1660516



Hand Showers



Body Sprays



Shower Arm Bracket



Wall Supply





Shower Arms





Town Square S 18" Towel Bar 7455018



Town Square S Towel Ring 7455190



Town Square S Toilet Paper Holder 7455230



Town Square S Double Robe Hook 7455210

Sink and Bath Faucets

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Confidence Hand Nat	 Town Square S Widespread Faucet Brass construction and washerless ceramic disc valve cartridges Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Valve bodies with integrated flexible hose connections for 6" – 12" (152 – 305 mm) installations Metal lever handles Brass pop-up drain 	(A) CEO	7455801.002 7455801.013 7455801.295 7455801.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	441 617 617 661
Centre by Briton Rat	 Town Square S Widespread Faucet Brass construction and washerless ceramic disc valve cartridges Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Valve bodies with integrated flexible hose connections for 6" – 12" (152 – 305 mm) installations Metal lever handles Red/Blue temperature indicators included Brass pop-up drain 	Â) CEO	7455811.002	Polished Chrome	468
	Town Square S Widespread Faucet • Same as 7455811.002 • Less drain	ADA CEO	7455814.002	Polished Chrome	414
				MAP) 🔝 🖉
Carlind by Urbo Nat	 Town Square S Monoblock Faucet Brass construction and washerless ceramic disc valve cartridge Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Braided flexible hoses with 3/8" compression connections Metal lever handle Brass push pop-up drain 	AA CEO	7455107.002 7455107.013 7455107.295 7455107.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	303 424 424 458
Centre by Revolution	Town Square S Monoblock Faucet • Brass construction and washerless ceramic disc valve cartridge • Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator • Braided flexible hoses with 3/8" compression connections • Metal lever handle • Red/Blue temperature indicators included • Brass pop-up drain	(Â) Ceo	7455117.002	Polished Chrome	315
	Town Square S	~	7455114.002	Polished Chrome	282

482 List Price Guide 2020

American Standard

Sink and Bath Faucets

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Control of the second s	 Town Square S Centerset Faucet Brass construction and washerless ceramic disc valve cartridges Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator 1/2" (13 mm) male pipe inlets Metal lever handles Brass push pop-up drain 	AD CEO	7455207.002 7455207.013 7455207.295 7455207.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	276 386 386 414
Control of the end of	 Town Square S Centerset Faucet Brass construction and washerless ceramic disc valve cartridges Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator 1/2" (13 mm) male pipe inlets Metal lever handles Red/Blue temperature indicators included Brass pop-up drain 	Â) ceo	7455217.002	Polished Chrome	287 287
	Town Square S Centerset Faucet • Same as 7455217.002 • Less drain	ÂÂ CEO	7455214.002	Polished Chrome	259
Control of the end of	Town Square S 2-Handle Wall Mount Faucet • Brass construction and washerless ceramic disc valve cartridges • Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator • Brass valve body • Metal lever handles • Grid drain	Â) CEO	7455451.002 7455451.013 7455451.295 7455451.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	441 617 617 661
	Escutcheon Plate • For use with 7455107, 7455117, 7455114		2555101P.002 2555101P.013 2555101P.295 2555101P.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	42 56 58 60

Town Square® S

Sink and Bath Faucets

DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Town Square S Roman Tub Filler Trim Kit With Personal Shower • Brass construction • All personal showers feature 5' (152 cm) long hose • Metal lever handles • Personal shower with 1.8 gpm/6.8 L/min maximum flow	CEO	T455901.002 T455901.013 T455901.295 T455901.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	772 1,080 1,080 1,157
For use with Flash [®] roman tub filler rough-in valve f	R910		МАР) 🗊 🖉
Town Square S Roman Tub Filler Trim Kit • Brass construction • Metal lever handles • Less personal shower	(Å	T455900.002 T455900.013 T455900.295 T455900.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	551 772 772 827
For use with Flash roman tub filler rough-in valve R	900		МАР	SR Ø
 Flash Roman Tub Filler Rough-in Valve With Personal Shower Brass construction and washerless 1/4 turn ceramic disc valve cartridges 1/2" copper inlets Connections to spout can be made via flexible hoses (provided) or 1/2" copper sweat connections 14 gpm/52.9 L/min maximum flow rate at 40 psi 8" - 16" (203 - 406 mm) flexible installation Adjustable rough-in: 2-1/2" (64 mm) maximum deck thickness Includes hand shower rough-in 		R910	N/A	286
 Flash Roman Tub Filler Rough-in Valve Brass construction and washerless 1/4 turn ceramic disc valve cartridges 1/2" copper inlets Connections to spout can be made via flexible hoses (provided) or 1/2" copper sweat connections 14 gpm/52.9 L/min maximum flow rate at 40 psi 8" - 16" (203 - 406 mm) flexible installation Adjustable rough-in: 2-1/2" (64 mm) maximum deck thickness 		R900	N/A	163
 Town Square S Freestanding Tub Filler With Personal Shower Brass construction and 1/4 turn washerless ceramic disc valve cartridge Personal shower features 59" (150 cm) long hose with 1.8 gpm/6.8 L/min maximum flow Metal lever handle Overall height: 43-1/2" (1105 mm) Spout reach: 8-1/2" (218 mm) Metal hand shower Shower bracket pivots 60° 	(Å) CEO	T455951.002 T455951.013 T455951.295 T455951.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	1,230 1,722 1,722 1,845
For use with Flash freestanding tub filler rough-in v	alve		MAP) 🔝 🖉
Flash Freestanding Tub Filler Rough-in Valve • Brass construction • 1/2" NPT threaded inlets • Level adjustable rough • Test plugs included • Must order trim separately		R950 R950SS	N/A Screwdriver Stops	204 235

American Standard

HOW TO Order	desired Control of the second	ough-in val d connectio	n.	Fully installed Bath/Sh	
	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
	 Town Square S Bath/Shower Trim Kit Includes Double Ceramic pressure balance cartridge 6-1/4" (160 mm) single function showerhead, 2.5 gpm/9.5 L/min maximum flow Brass shower arm Metal wall escutcheon Metal lever handle Metal slip-on diverter tub spout 		TU455502.002 TU455502.013 TU455502.295 TU455502.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	423 582 582 622
	For use with Flash shower rough-in valves			МА	P SR Ø
	 Town Square S Shower Only Trim Kit Includes Double Ceramic pressure balance cartridge 6-1/4" (160 mm) single function showerhead 2.5 gpm/9.5 L/min maximum flow Brass shower arm Metal wall escutcheon Metal lever handle 	(Å)	TU455501.002 TU455501.013 TU455501.295 TU455501.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	341 466 466 498
	For use with Flash shower rough-in valves			MA	P SR Ø
	Town Square S Valve Only Trim Kit • Includes Double Ceramic pressure balance cartridge • Metal wall escutcheon • Metal lever handle	(Å	TU455500.002 TU455500.013 TU455500.295 TU455500.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	237 320 320 341
	For use with Flash shower rough-in valves				
	 Town Square S Bath/Shower Trim Kit Includes Double Ceramic pressure balance cartridge Water-saving 6-1/4" (160 mm) single function showerhead, 1.8 gpm/6.8 L/min maximum flow Brass shower arm Metal wall escutcheon Metal lever handle Metal slip-on diverter tub spout 	CEO	TU455508.002 TU455508.013 TU455508.295 TU455508.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	423 582 582 622
	For use with Flash shower rough-in valves			MA	P SR Ø
	 Town Square S Shower Only Trim Kit Includes Double Ceramic pressure balance cartridge Water-saving 6-1/4" (160 mm) single function showerhead, 1.8 gpm/6.8 L/min maximum flow Brass shower arm Metal wall escutcheon Metal lever handle 	ADA CEO	TU455507.002 TU455507.013 TU455507.295 TU455507.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	341 466 466 498
	For use with Flash shower rough-in valves			MA	P <u>S</u> R 🖉

American Standard

Town Square® S

Bath/Shower Trim Kits and Valves

	DESCRIPTION	SKU #		LIST PRIC
	Flash® Shower Rough-In Valve With Universal Connections • 1/2" Male NPT/Sweat inlets/outlets accept 1/2" copper, 1/2" iron pipe, PEX or CPVC adapters • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU101 RU101SS	Screwdriver Stops	64 91
	Flash Shower Rough-In Valve With Stub-out Connections • 1/2" Stub-out inlets/outlets accept 1/2" press-connect fittings • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU102 RU102SS	Screwdriver Stops	64 91
	Flash Shower Rough-In Valve With PEX Crimp Connections • 1/2" PEX crimp inlets/Universal outlets (ASTM F1807) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU107 RU107SS	Screwdriver Stops	64 91
F	Flash Shower Rough-In Valve With PEX Crimp Elbow Connections • 1/2" PEX crimp elbow inlets/Universal outlets (ASTM F1807) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU107E RU107ESS	Screwdriver Stops	84 111
	Flash Shower Rough-In Valve With PEX Cold Expansion Connections • 1/2" PEX cold expansion inlets/Universal outlets (ASTM F1960) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU108 RU108SS	Screwdriver Stops	64 91
	 Flash Shower Rough-In Valve With PEX Cold Expansion Elbow Connections 1/2" PEX cold expansion elbow inlets/Universal outlets (ASTM F1960) Brass valve body Flow rate: 5.1 gpm @ 45 psi* Back-to-back capability Includes test plug with stainless steel ring Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits 	RU108E RU108ESS	Screwdriver Stops	84 111
	Flash Shower Rough-In Valve With CPVC Connections • 1/2" CPVC inlets/Universal outlets • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU109 RU109SS	Screwdriver Stops	84 111

* When combined with Double Ceramic pressure balance cartridge.

American Standard

Town Square® S

DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICI
Town Square S 2-Handle Thermostatic Valve Trim Kit • Metal wall escutcheon • Metal lever handles • Less valve • Valve must be purchased separately	(Å)	* T455740.002 * T455740.013 * T455740.295 * T455740.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	248 347 347 369
For use with rough-in valves R520, R522, R522S, F	3523 and	I R523	МА	P (SR) 🖉
 2-Handle Thermostatic Rough Valve With On/Off And Volume Control 1 Function Top handle controls On/Off and Volume Bottom handle controls Temperature Ceratherm® thermostat maintains constant shower temperature by adjusting to water supply pressure and temperature 1/2" (13 mm) NPT inlets/outlets Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions 5.9 gpm/22.3 L/min at 40 psi Meets ASSE Standard 1016 – Type T 		* R520	N/A	358 SR Ø
 2-Handle Thermostatic Rough Valve With Built-In 2-Way Diverter Diverts to 2 discrete functions Top handle controls On/Off, Volume and Diverter functions Bottom handle controls Temperature Ceratherm thermostat maintains constant shower temperature by adjusting to water supply pressure and temperature 1/2" (13 mm) NPT inlets/outlets Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions 6.5 gpm/24.6 L/min at 40 psi Meets ASSE Standard 1016 – Type T Requires twin ell for use with diverter tub spout 	CEO	* R522	N/A	325 [SR] 🖉
Same as Above Diverts to 2 Discrete/1 Shared Function 		* R522S	N/A	325 Sr Ø
 2-Handle Thermostatic Rough Valve With Built-In 3-Way Diverter Diverts to 3 discrete functions Top handle controls On/Off, Volume and Diverter functions Bottom handle controls Temperature Ceratherm thermostat maintains constant shower temperature by adjusting to water supply pressure and temperature 1/2" (13 mm) NPT inlets/outlets Hot Limit Safety Stop is set to a maximum of 112°F (44°C) with interim stops for local conditions 6.5 gpm/24.6 L/min at 40 psi Meets ASSE Standard 1016 – Type T Requires twin ell for use with diverter tub spout 	CEO	* R523	N/A	352 (SR)
Same as Above		* R523S	N/A	352
Diverts to 3 Discrete/2 Shared Functions				



DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Town Square S Diverter Valve Trim Kit • Metal lever handle • Less valve • Valve must be purchased separately	Â	T455430.002 T455430.013 T455430.295 T455430.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	111 155 155 166
For use with rough-in valves R422, R422S, R4	33 and R433S		MA	₽ SR Ø
 2-Way In-Wall Diverter Valve Controls water flow between 2 outlets (shower or sprays) 2 Discrete functions 	CEO	R422	N/A	205 Sr Ø
Same as Above Diverts to 2 Discrete/1 Shared function 		R422S	NA	205 (SR)
 3-Way In-Wall Diverter Valve Controls water flow between 3 outlets (shower or sprays) 3 Discrete functions 	CEO	R433	NA	232 Sr Ø
Same as Above • Diverts to 3 Discrete/3 Shared functions		R433S	NA	232 SR Ø






American Standard


Town Square® S

Shower Systems

Town Square S Thermostatic Bath/Shower System

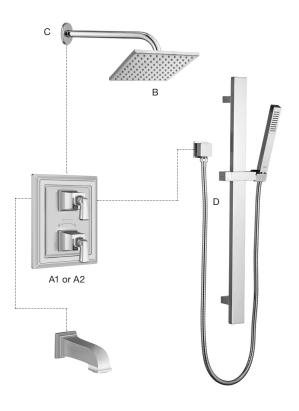

Town Square S Thermostatic Shower System

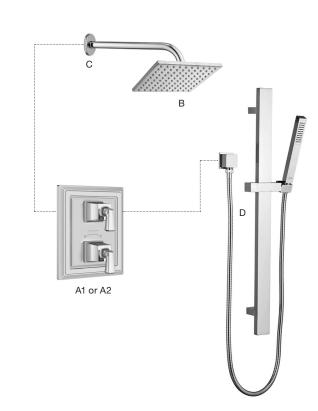

Town Square S Thermostatic Bath/Shower System

				LIST PRICE FOR SYSTE	
	DESCRIPTION	QTY	SKU #	002	295
Α	Town Square S 2-Handle Thermostatic Valve Trim Kit	1	T455740	248	347
В	8" Square Rain Showerhead	1	1660688	206	288
С	12" Wall-Mount Right Angle Shower Arm	1	1660194	89	134
D	Times Square [®] Slide Bar Kit	1	1662184	350	489
Е	Town Square S Tub Spout	1	8888111	99	139
Requir	ed Components (not shown)				
1	2-Handle Thermostatic Rough-In Valve With Built-In 3-Way Diverter - Non-Shared Function	1	R523	35	52
OR	(Choose R523 or R523S)				
2	2-Handle Thermostatic Rough-In Valve With Built-In 3-Way Diverter - Shared Function	1	R523S	35	52
	Bath/S	hower	System Total	1,344	1,749

Town Square S Thermostatic Shower System

				LIST PRICE	FOR SYSTEM
	DESCRIPTION	QTY	SKU #	002	295
А	Town Square S 2-Handle Thermostatic Valve Trim Kit	1	T455740	248	347
В	8" Square Rain Showerhead	1	1660688	206	288
С	12" Wall-Mount Right Angle Shower Arm	1	1660194	89	134
D	Times Square [®] Slide Bar Kit	1	1662184	350	489
lequir	red Components (not shown)				
1	2-Handle Thermostatic Rough-In Valve With Built-In 2-Way Diverter - Non-Shared Function	1	R522	3	25
OR	(Choose R522 or R522S)				
2	2-Handle Thermostatic Rough-In Valve With Built-In 2-Way Diverter - Shared Function	1	R522S	3	25
	6	hower	System Total	1,218	1,583

Shower System Total

Accessories

Town Square S 7455018.002 Polished Chrome Polished Nickel Imit reata construction Concealed mounting 7455018.226 Polished Chrome Polished Nickel Imit reata construction Concealed mounting 7455018.2278 Polished Chrome Polished Chrome Polished Chrome Imit reata construction 7455018.278 Town Square S 7455024.202 Polished Chrome Polished Chrome <t< th=""></t<>
Concealed mounting Concealed mountin
Town Square S 7455024.002 Polished Chrome Polished Nickel Polish
24" Towel Bar 7455024.013 7455024.225 7455024.278 Polished Nickel 9 Image: State of State o
 All metal construction Concealed mounting All metal construction Concealed mounting Concealed mounting Concealed mounting Fatsource S Town Square S Towel Ring T(178 mm) diameter ring All metal construction Concealed mounting Town Square S All metal construction Concealed mounting Town Square S All metal construction Concealed mounting All metal construction Concealed mounting Town Square S Concealed mounting Town Square S Concealed mounting All metal construction Concealed mounti
Concealed mounting Concealed mountin
Town Square S Towel Ring - 7" (178 mm) diameter ring - All metal construction - Concealed mounting 7455190.002 7455190.295 7455190.295
Towel Ring 7455190.013 Polished Nickel Brushed Nickel • 7" (178 mm) diameter ring • All metal construction 7455190.278 Legacy Bronze • Concealed mounting • Concealed mounting 7455190.278 Legacy Bronze • Concealed Nickel • Concealed mounting • Concealed mounting • Concealed mounting • Concealed Nickel • Concealed Nickel • Concealed mounting • Concealed mounting • Concealed Nickel • Concealed Nickel • Concealed Nickel • Concealed mounting • Concealed mounting • Concealed Nickel
 7" (178 mm) diameter ring All metal construction Concealed mounting Town Square S Concealed mounting Town Square S Concealed mounting All metal construction Concealed mounting Town Square S Concealed mounting Town Square S Concealed mounting Town Square S To
All metal construction Concealed mounting All metal construction Concealed mounting Concealed mounting Town Square S Double Robe Hook All metal construction Concealed mounting Town Square S Town Square S Concealed mounting Town Square S Concealed mounting Town Square S Town Square S Concealed mounting Town Square S
Concealed mounting Concealed mountin
Town Square S 7455210.002 Polished Chrome Polished Nickel Double Robe Hook 7455210.013 Polished Nickel Polished Nickel • All metal construction 7455210.295 Brushed Nickel Polished Nickel • Concealed mounting 7455210.278 Legacy Bronze Polished Chrome Polished Nickel • Town Square S Town Square S 7455230.002 Polished Chrome Polished Nickel • Toilet Paper Holder 7455230.013 Polished Chrome Polished Nickel Polished Nickel
Double Robe Hook 7455210.013 Polished Nickel • All metal construction 7455210.295 Brushed Nickel • Concealed mounting 7455210.278 Legacy Bronze Image: State Stat
All metal construction Concealed mounting All metal construction Concealed mounting Town Square S Toilet Paper Holder Toilet Paper Toilet Paper Holder Toilet Pap
Concealed mounting Concealed mounting Town Square S Toilet Paper Holder Toilet Pa
Town Square S 7455230.002 Polished Chrome State Toilet Paper Holder 7455230.013 Polished Nickel State
Toilet Paper Holder 7455230.013 Polished Nickel
Toilet Paper Holder 7455230.013 Polished Nickel
All motel construction 7455230 295 Brushed Nickel
Concealed mounting 7455230.278 Legacy Bronze
MAP SR
Town Square S 7455260.002 Polished Chrome 4
Train Rack 7455260.013 Polished Nickel 6
• 24" (600 mm) length • All metal construction
All metal construction Concealed mounting All metal construction Concealed mounting Concealed mounting
MAP SR

490 List Price Guide 2020

American Standard





Inspired by vintage industrial design, the **Townsend Collection** lends character to your bathroom, displaying a sense of hand-forged craftsmanship and unparalleled beauty.



American Standard

Sink





Widespread Faucet 7353801

Widespread Faucet 7353841

Monoblock Faucet 7353101

Bath





Roman Tub Filler Trim Kit T353901, T353900

Tub Spouts

2-in-1 Hand Shower

2-Handle Thermostatic

Valve Trim Kit

T353740★







Bath/Shower Trim Kits TU353502



Central Thermostatic Valve Trim Kit T353730★





Townsend 18" Towel Bar 7353018



Slide Bar Kits

Showerhead 1660508





Hand Showers

Townsend

Toilet Paper Holder

7353230

Body Sprays



Shower Arm Bracket



Wall Supply



Shower Arms



Townsend Double Robe Hook 7353210



Townsend

Towel Ring

7353190

Sink and Bath Faucets

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Called by Rev of the Called by	 Townsend Widespread Faucet Brass construction Washerless ceramic disc valve cartridges Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Cast brass spout Cast brass valve bodies with reinforced flexible hose connections for 6" – 12" (152 – 305 mm) installations Braided flexible supply hoses with 3/8" (10 mm) compression connectors Metal lever handles Metal Speed Connect[®] pop-up drain 	(Å) CEO	7353801.002 7353801.013 7353801.295 7353801.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	392 547 547 587
Center by RHO RET	 Townsend Widespread Faucet Brass construction Washerless ceramic disc valve cartridges Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator Cast brass spout Cast brass valve bodies with reinforced flexible hose connections for 6" – 12" (152 – 305 mm) installations Braided flexible supply hoses with 3/8" (10 mm) compression connectors Metal lever handles Metal Speed Connect pop-up drain 	Â) CEO	7353841.002 7353841.013 7353841.295 7353841.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	392 547 547 587
Define by RMAD NAT	Townsend Monoblock Faucet • Brass construction • Washerless ceramic disc valve cartridges • Water-conserving 1.2 gpm/4.5 L/min pressure-compensating aerator • Cast brass spout • Braided flexible supply hoses with 3/8" (10 mm) compression connectors • Metal lever handles • Metal Speed Connect pop-up drain	(DA) CEO	7353101.002 7353101.013 7353101.295 7353101.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	287 401 401 429
	Escutcheon Plate • For use with 7353101		7353101P.002 7353101P.013 7353101P.295 7353101P.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	40 55 55 59 (SR)

American Standard

Sink and Bath Faucets

 DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Townsend Roman Tub Filler Trim Kit With Personal Shower • Brass construction • All personal showers feature 5' (152 cm) long hose • Metal lever handles • Personal shower with 1.8 gpm/6.8 L/min maximum flow	CEO	T353901.002 T353901.013 T353901.295 T353901.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	661 926 926 992
For use with Flash [®] roman tub filler rough-in valve f	R910		MA	P (SR) Ø
Townsend Roman Tub Filler Trim Kit • Brass construction • Metal lever handles • Less personal shower	Â	T353900.002 T353900.013 T353900.295 T353900.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	496 695 695 744
For use with Flash roman tub filler rough-in valve R	900		MA	P (SR) 🖉
 Flash Roman Tub Filler Rough-in Valve With Personal Shower Brass construction and washerless 1/4 turn ceramic disc valve cartridges 1/2" copper inlets Connections to spout can be made via flexible hoses (provided) or 1/2" copper sweat connections 14 gpm/52.9 L/min maximum flow rate at 40 psi 8" - 16" (203 - 406 mm) flexible installation Adjustable rough-in: 2-1/2" (64 mm) maximum deck thickness Includes hand shower rough-in 		R910	N/A	286
 Flash Roman Tub Filler Rough-in Valve Brass construction and washerless 1/4 turn ceramic disc valve cartridges 1/2" copper inlets Connections to spout can be made via flexible hoses (provided) or 1/2" copper sweat connections 14 gpm/52.9 L/min maximum flow rate at 40 psi 8" - 16" (203 - 406 mm) flexible installation Adjustable rough-in: 2-1/2" (64 mm) maximum deck thickness 		R900	N/A	163

American Standard

HOW TO Order	-	Choose rough-in valve desired connection	n Valve	Fully installed Bath/Sh	
	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
	Townsend Bath/Shower Trim Kit Includes Double Ceramic pressure balance cartridge 6" (152 mm) showerhead, 2.5 gpm/9 maximum flow Shower arm and flange Brass wall escutcheon Metal lever handle Slip-on diverter tub spout		TU353502.002 TU353502.013 TU353502.295 TU353502.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	304 416 416 444
	For use with Flash shower rough-in val	ves		MA	P (SR) 🖉
	 Townsend Shower Only Trim Kit Includes Double Ceramic pressure balance cartridge 6" (152 mm) showerhead, 2.5 gpm/9 maximum flow Shower arm and flange Brass wall escutcheon Metal lever handle 		TU353501.002 TU353501.013 TU353501.295 TU353501.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	271 367 367 393
	For use with Flash shower rough-in val	ves		MA	P SR Ø
	Townsend Valve Only Trim Kit • Includes Double Ceramic pressure balance cartridge • Brass wall escutcheon • Metal lever handle • Less valve For use with Flash shower rough-in value		TU353500.002 TU353500.013 TU353500.295 TU353500.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	212 286 286 304
	Townsend Bath/Shower Trim Kit Includes Double Ceramic pressure balance cartridge Water-saving showerhead, 1.75 gpm/6.6 L/min maximum flow Shower arm and flange Brass wall escutcheon Metal lever handle Slip-on diverter tub spout	CEO	TU353508.002 TU353508.013 TU353508.295 TU353508.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	304 416 416 444
	For use with Flash shower rough-in val	ves		MA	P <u>S</u> R 🖉
Control by Party Party Control by Control by	 Townsend Shower Only Trim Kit Includes Double Ceramic pressure balance cartridge Water-saving showerhead, 1.75 gpm/6.6 L/min maximum flow Shower arm and flange Brass wall escutcheon Metal lever handle 	ÂDA CEO	TU353507.002 TU353507.013 TU353507.295 TU353507.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	271 367 367 393
	For use with Flash shower rough-in val	ves		MA	P (SR 🖉





Bath/Shower Trim Kits and Valves

	DESCRIPTION	SKU #		LIST PRIC
	 Flash[®] Shower Rough-In Valve With Universal Connections 1/2" Male NPT/Sweat inlets/outlets accept 1/2" copper, 1/2" iron pipe, PEX or CPVC adapters Brass valve body Flow rate: 5.1 gpm @ 45 psi* Back-to-back capability Includes test plug with stainless steel ring Cartridge ships with trim 	RU101 RU101SS	Screwdriver Stops	64 91
	For use with TU series pressure balance bath/shower trim kits			
	Flash Shower Rough-In Valve With Stub-out Connections • 1/2" Stub-out inlets/outlets accept 1/2" press-connect fittings • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU102 RU102SS	Screwdriver Stops	64 91
	Flash Shower Rough-In Valve With PEX Crimp Connections • 1/2" PEX crimp inlets/Universal outlets (ASTM F1807) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU107 RU107SS	Screwdriver Stops	64 91
FTOT	Flash Shower Rough-In Valve With PEX Crimp Elbow Connections • 1/2" PEX crimp elbow inlets/Universal outlets (ASTM F1807) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU107E RU107ESS	Screwdriver Stops	84 111
	Flash Shower Rough-In Valve With PEX Cold Expansion Connections • 1/2" PEX cold expansion inlets/Universal outlets (ASTM F1960) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU108 RU108SS	Screwdriver Stops	64 91
	Flash Shower Rough-In Valve With PEX Cold Expansion Elbow Connections • 1/2" PEX cold expansion elbow inlets/Universal outlets (ASTM F1960) • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim For use with TU series pressure balance bath/shower trim kits	RU108E RU108ESS	Screwdriver Stops	84 111
	Flash Shower Rough-In Valve With CPVC Connections • 1/2" CPVC inlets/Universal outlets • Brass valve body • Flow rate: 5.1 gpm @ 45 psi* • Back-to-back capability • Includes test plug with stainless steel ring • Cartridge ships with trim	RU109 RU109SS	Screwdriver Stops	84 111

Townsend

* When combined with Double Ceramic pressure balance cartridge.

American Standard

Bath/Shower Trim Kits and Valves

DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
Townsend 2-Handle Thermostatic Valve Trim Kit • Brass wall escutcheon • Metal lever handles • Less valve (must be purchased separately)	* T353740.002 * T353740.013 * T353740.295 * T353740.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	238 333 333 357
For use with rough-in valves R520, R522, R522S, F	8523 and R523S	MA	P (SR) 🖉
 2-Handle Thermostatic Rough Valve With On/Off and Volume Control 1/2" (13 mm) NPT inlets/outlets 5.9 gpm/22.3 L/min at 40 psi Top handle controls On/Off and Volume 1 Function All Ceratherm[™] valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature changes Adjustable temperature selections Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T Requires separate diverter valve when used with more than one outlet 	* R520	N/A	358 Sr 2
 2-Handle Thermostatic Rough Valve With Built-in 2-Way Diverter	* R522 CEO	N/A	325
 1/2" (13 mm) NPT inlets/outlets 6.5 gpm/24.6 L/min at 40 psi Top handle controls On/Off, Volume and Diverter functions Diverter functions All Ceratherm valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature changes Adjustable temperature selections Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T 			
Requires twin ell for use with diverter tub spout	4 DE000	N/A	
Same as Above Diverts to 2 Discrete/1 Shared Function 	* R522S	N/A	325 Sr 🖉
 2-Handle Thermostatic Rough Valve With Built-in 3-Way Diverter 1/2" (13 mm) NPT inlets/outlets 6.5 gpm/24.6 L/min at 40 psi Top handle controls On/Off, Volume and Diverter functions Diverts to 3 discrete functions All Ceratherm valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature changes Adjustable temperature selections Hot Limit Safety Stop is set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T 	* R523 CEO	N/A	352
Requires twin ell for use with diverter tub spout			SRÌ 🖉
Same as Above • Diverts to 3 Discrete/2 Shared Functions	* R523S	N/A	352 (SR) Ø

498 List Price Guide 2020

 \bigstar DISCONTINUED. Available while supplies last.



Bath/Shower Trim Kits and Valves

Townsend®

DESCRIPTION		SKU #	COLOR/FINISH	LIST PF
Townsend Central Thermostatic Valve Trim Kit • Brass wall escutcheon • Metal lever handle • Less valve (must be purchased separately) • Must order with On/Off volume control to complete system	Â	* T353730.002 * T353730.013 * T353730.295 * T353730.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	166 233 233 250
For use with rough-in valves R510 and R530			MA	P SR
 Central Thermostatic Rough Valve Body 1/2" (13 mm) NPT inlets/outlets 9.5 gpm/35.9 L/min at 40 psi All Ceratherm[™] valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature changes Adjustable temperature selections Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T Must order with On/Off volume control to complete system When used as a bath/shower a separate diverter valve is required (R422, R422S, R433, R433S or diverter tub spout) Requires twin ell for use with diverter tub spout 		* R510	N/A	38 ¹
				SR
 Central Thermostatic Rough Valve Body 3/4" (19 mm) NPT inlets/outlets 16 gpm/60.6 L/min at 40 psi All Ceratherm valves are thermostatically controlled to maintain a constant shower temperature even in cases of water supply pressure and temperature changes; adjustable temperature selections Hot Limit Safety Stop set to a maximum of 112°F (44°C) with interim stops for local conditions Meets ASSE Standard 1016 – Type T Must order with On/Off volume control to complete system When used as a bath/shower a separate diverter valve is required (R422, R422S, R433, R433S or diverter tub spout) Requires twin ell for use with diverter tub spout 		* R530	N/A	430
Townsend On/Off Volume Control Valve Trim Kit • Metal lever handle • Less valve (must be purchased separately)	(Å	T353700.002 T353700.013 T353700.295 T353700.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	78 109 109 118
For use with rough-in valves R701 and R711			MA	P SR
 1/2" (13 mm) On/Off Volume Control Rough Valve 1/2" (13 mm) inlet/outlet 		R701	N/A	69
3/4" (19 mm) On/Off Volume Control Rough Valve • 3/4" (19 mm) inlet/outlet		R711	N/A	105

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
	Townsend Diverter Valve Trim Kit • Metal lever handle • Less valve (must be purchased separately)	ADA	T353430.002 T353430.013 T353430.295 T353430.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	105 147 147 158
	For use with rough-in valves R422, R422S, R433	3 and R4338	3	MAP	SR Ø
4	 2-Way In-Wall Diverter Valve Controls water flow between 2 outlets (shower or sprays) 2 Discrete functions 	CEO	R422	N/A	205
	Same as Above Diverts to 2 Discrete/1 Shared function 	2 Discrete functions Same as Above R422S NA	NA	205	
4	 3-Way In-Wall Diverter Valve Controls water flow between 3 outlets (shower or sprays) 3 Discrete functions 	CEO	R433	NA	232
	Same as Above • Diverts to 3 Discrete/3 Shared functions		R433S	NA	232 SR Ø







Townsend[®]

Shower Systems

Townsend Thermostatic Bath/Shower System

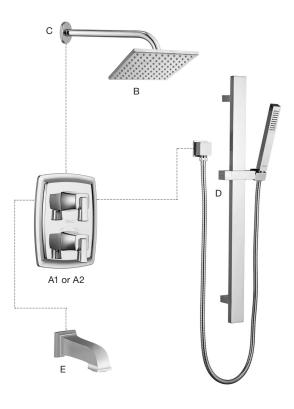

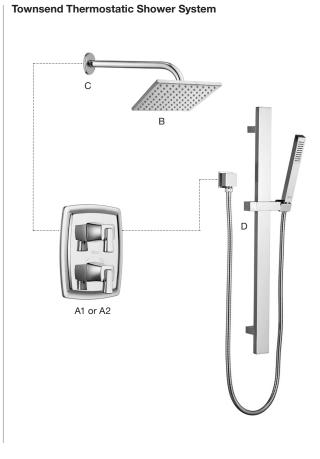

Townsend Thermostatic Bath/Shower System

				LIST PRICE F	FOR SYSTEM
	DESCRIPTION	QTY	SKU #	002	295
А	Townsend 2-Handle Thermostatic Valve Trim Kit	1	T353740	238	333
В	8" Square Rain Showerhead	1	1660688	206	288
С	12" Wall-Mount Right Angle Shower Arm	1	1660194	89	134
D	Times Square [®] Slide Bar Kit	1	1662184	350	489
Е	Town Square®S Tub Spout	1	8888111	99	139
Requir	ed Components (not shown)				
1	2-Handle Thermostatic Rough-In Valve With Built-In 3-Way Diverter - Non-Shared Function	1	R523	35	52
OR	(Choose R523 or R523S)				
2	2-Handle Thermostatic Rough-In Valve With Built-In 3-Way Diverter - Shared Function	1	R523S	35	52
	Bath/S	howers	System Total	1,334	1,735

Townsend Thermostatic Shower System

				LIST PRICE	FOR SYSTEM
	DESCRIPTION	QTY	SKU #	002	295
А	Townsend 2-Handle Thermostatic Valve Trim Kit	1	T353740	238	333
В	8" Square Rain Showerhead	1	1660688	206	288
С	12" Wall-Mount Right Angle Shower Arm	1	1660194	89	134
D	Times Square Slide Bar Kit	1	1662184	350	489
Requir	red Components (not shown)				
1	2-Handle Thermostatic Rough-In Valve With Built-In 2-Way Diverter - Non-Shared Function	1	R522	32	25
OR	(Choose R522 or R522S)				
2	2-Handle Thermostatic Rough-In Valve With Built-In 2-Way Diverter - Shared Function	1	R522S	32	25
	8	howor	System Total	1,208	1,569

Shower System Total



Accessories

	DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
5	Townsend 18" Towel Bar • Brass bar • All metal construction • Concealed mounting	7353018.002 7353018.013 7353018.295 7353018.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	67 92 92 99
			MA	P 🗊 🖉
	Townsend	7353024.002	Polished Chrome	71 99
	24" Towel Bar • Brass bar	7353024.013 7353024.295	Polished Nickel Brushed Nickel	99 99
5	All metal construction Concealed mounting	7353024.278	Legacy Bronze	106
			MA	P SR Ø
	Townsend	7353224.002	Polished Chrome	132
	24" Double Towel Bar	7353224.013	Polished Nickel	186
N	All metal constructionConcealed mounting	7353224.295 7353224.278	Brushed Nickel Legacy Bronze	186 199
			MA	P SR Ø
	Townsend	7353190.002	Polished Chrome	44
L'ALL D	Towel Ring	7353190.013	Polished Nickel	62
	 7" (178 mm) diameter ring All metal construction Concealed mounting	7353190.295 7353190.278	Brushed Nickel Legacy Bronze	62 67
			MA	P SR Ø
	Townsend	7353210.002	Polished Chrome	31
	Double Robe Hook	7353210.013	Polished Nickel	43
	All metal constructionConcealed mounting	7353210.295 7353210.278	Brushed Nickel Legacy Bronze	43 46
62			MA	P SR Ø
	Townsend	7353230.002	Polished Chrome	53
*	Toilet Paper Holder	7353230.013	Polished Nickel	74
	All metal constructionConcealed mounting	7353230.295 7353230.278	Brushed Nickel Legacy Bronze	74 79
	-		MA	P SR Ø



Townsend




Bathroom Accessories

Every bathroom deserves accessories that offer functionality and the perfect finishing touch. These essential pieces are designed with attention to detail, reflecting the nuances of our collections and adding distinction to this personal space.



American Standard

Bathroom Accessories at a Glance...

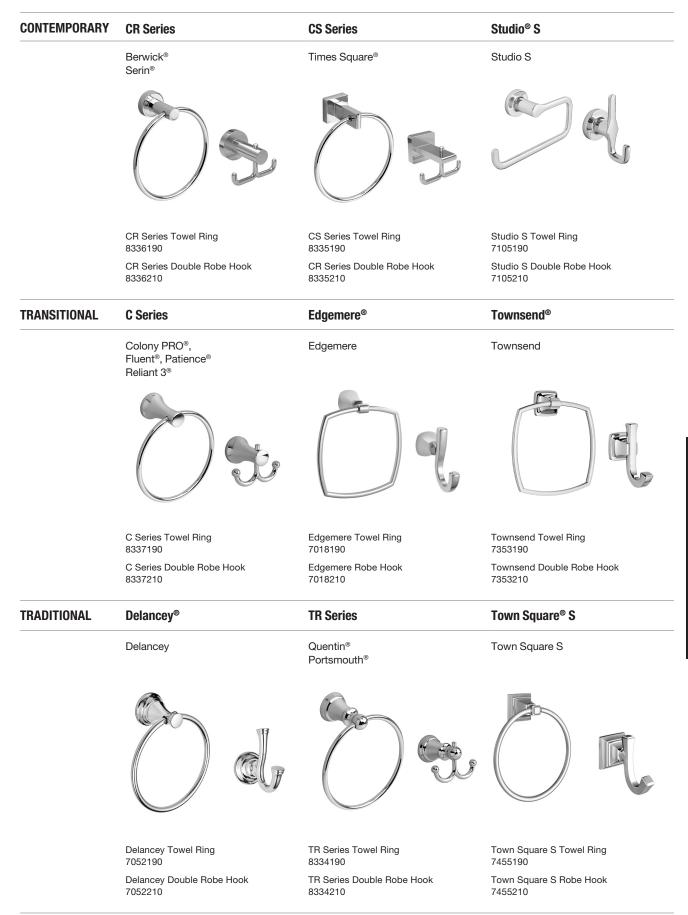

Bathroom Accessories

CR Series

Contemporary Bathroom Accessories

	DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
8	CR Series 18" Towel Bar • Brass bar • All metal construction • Concealed mounting	8336018.002 8336018.295	Polished Chrome Brushed Nickel	58 82
			MAF	srì 🖉
(in the second s	CR Series 24" Towel Bar • Brass bar • All metal construction • Concealed mounting	8336024.002 8336024.295	Polished Chrome Brushed Nickel	62 86
			MAF	SR Ø
	CR Series Towel Ring • 7" (178 mm) diameter ring • All metal construction • Concealed mounting	8336190.002 8336190.295	Polished Chrome Brushed Nickel	36 50
			MAF	SR 🖉
	CR Series Double Robe Hook • All metal construction • Concealed mounting	8336210.002 8336210.295	Polished Chrome Brushed Nickel	27 38
Read and			MAF) îsi 🖉
	CR Series Toilet Paper Holder • All metal construction • Concealed mounting	8336230.002 8336230.295	Polished Chrome Brushed Nickel	47 67
			MAF) (SR) Ø

American Standard

CS Series

Contemporary Bathroom Accessories

DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
CS Series 18" Towel Bar • Brass bar • All metal construction • Concealed mounting	8335018.002 8335018.295	Polished Chrome Brushed Nickel	58 82
		~	
CS Series 24" Towel Bar • Brass bar • All metal construction • Concealed mounting	8335024.002 8335024.295	Polished Chrome Brushed Nickel	62 86
		MAF	SR 🖉
CS Series Towel Ring • 7" (178 mm) diameter ring • All metal construction • Concealed mounting	8335190.002 8335190.295	Polished Chrome Brushed Nickel	36 50
		MAF) îsr 🖉
CS Series Double Robe Hook • All metal construction • Concealed mounting	8335210.002 8335210.295	Polished Chrome Brushed Nickel	27 38
		MAF	SR 🖉
CS Series Toilet Paper Holder • All metal construction • Concealed mounting	8335230.002 8335230.295	Polished Chrome Brushed Nickel	47 67
		MAF	SR Ø

American Standard

Studio[®] S

Contemporary Bathroom Accessories

	DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
(C)	Studio S 18" Towel Bar • Brass bar • All metal construction • Concealed mounting	7105018.002 7105018.295 7105018.243	Polished Chrome Brushed Nickel Matte Black	57 80 88
¢.	Studio S 24" Towel Bar • Brass bar • All metal construction • Concealed mounting	7105024.002 7105024.295 7105024.243	Polished Chrome Brushed Nickel Matte Black	60 85 94
	Studio S 24" Double Towel Bar • Brass bar • All metal construction • Concealed mounting	7105224.002 7105224.295 7105224.243	Polished Chrome Brushed Nickel Matte Black	121 170 182
(E)	Studio S Towel Ring • All metal construction • Concealed mounting	7105190.002 7105190.295 7105190.243	Polished Chrome Brushed Nickel Matte Black	36 50 55
			MA	P SR Ø
	Studio S Double Robe Hook • All metal construction • Concealed mounting	7105210.002 7105210.295 7105210.243	Polished Chrome Brushed Nickel Matte Black	27 38 41
			MA	P 🗊 🖉
	Studio S Toilet Paper Holder • All metal construction • Concealed mounting	7105230.002 7105230.295 7105230.243	Polished Chrome Brushed Nickel Matte Black	46 65 72
			MA	P SR Ø
			STUDIO S COLLECTIO	N

2018 GOOD DESIGN Award

Bathroom Accessories

American Standard

C Series

Transitional Bathroom Accessories

	DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
	C Series 18" Towel Bar • Brass bar • All metal construction • Concealed mounting	8337018.002 8337018.013 8337018.295 8337018.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	58 82 82 88 (P) SR ()
A	C Series 24" Towel Bar • Brass bar • All metal construction • Concealed mounting	8337024.002 8337024.013 8337024.295 8337024.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	62 86 86 92 (SR) (20)
	C Series Towel Ring • 7" (178 mm) diameter ring • All metal construction • Concealed mounting	8337190.002 8337190.013 8337190.295 8337190.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	36 50 50 54
	C Series Double Robe Hook • All metal construction • Concealed mounting	8337210.002 8337210.013 8337210.295 8337210.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	27 38 38 38
	C Series Toilet Paper Holder • All metal construction • Concealed mounting	8337230.002 8337230.013 8337230.295 8337230.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	47 67 67 72

American Standard

Edgemere®

Transitional Bathroom Accessories

	DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
FC	Edgemere 18" Towel Bar • Brass bar • All metal construction • Concealed mounting	7018018.002 7018018.295 7018018.278	Polished Chrome Brushed Nickel Legacy Bronze	60 85 91
-	Edgemere 24" Towel Bar • Brass bar • All metal construction • Concealed mounting	7018024.002 7018024.295 7018024.278	Polished Chrome Brushed Nickel Legacy Bronze	67 92 99
	Edgemere Towel Ring • 7-1/4" (185 mm) diameter ring • All metal construction • Concealed mounting	7018190.002 7018190.295 7018190.278	Polished Chrome Brushed Nickel Legacy Bronze	44 62 67
	Edgemere Robe Hook • All metal construction • Concealed mounting	7018210.002 7018210.295 7018210.278	Polished Chrome Brushed Nickel Legacy Bronze	33 46 49
	Edgemere Toilet Paper Holder • Pivoting arm • All metal construction • Concealed mounting	7018230.002 7018230.295 7018230.278	Polished Chrome Brushed Nickel Legacy Bronze	49 70 75

American Standard

Townsend®

Transitional Bathroom Accessories

	DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
	Townsend 18" Towel Bar • Brass bar • All metal construction • Concealed mounting	7353018.002 7353018.013 7353018.295 7353018.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	67 92 92 99
			MA	P SR Ø
	Townsend 24" Towel Bar	7353024.002 7353024.013 7252024.015	Polished Chrome Polished Nickel	71 99
	Brass barAll metal constructionConcealed mounting	7353024.295 7353024.278	Brushed Nickel Legacy Bronze	99 106
			MA	P SR Ø
J.	Townsend	7353224.002 7353224.013	Polished Chrome Polished Nickel	132 186
	 24" Double Towel Bar Brass bar All metal construction Concealed mounting 	7353224.295 7353224.278	Brushed Nickel Legacy Bronze	186 199
			MA	P <u>S</u> R 🖉
	Townsend Towel Ring	7353190.002 7353190.013	Polished Chrome Polished Nickel	44 62
	 6-7/8" (175 mm) diameter ring All metal construction Concealed mounting 	7353190.295 7353190.278	Brushed Nickel Legacy Bronze	62 67
			MA	P SR Ø
	Townsend Double Robe Hook	7353210.002 7353210.013	Polished Chrome Polished Nickel	31 43
	All metal construction Concealed mounting	7353210.295 7353210.278	Brushed Nickel Legacy Bronze	43 46
47			MA	P SR Ø
	Townsend Toilet Paper Holder	7353230.002 7353230.013	Polished Chrome Polished Nickel	53 74
	 Pivoting arm All metal construction Concealed mounting 	7353230.295 7353230.278	Brushed Nickel Legacy Bronze	74 79
			MA	P SR Ø



Delancey®

Traditional Bathroom Accessories

	DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
	Delancey	7052018.002	Polished Chrome	67
1 a	18" Towel Bar	7052018.013	Polished Nickel	93
6-50	Brass bar	7052018.295	Brushed Nickel	93
	 All metal construction Concealed mounting	7052018.278	Legacy Bronze	100
			MAI	SR 🖉
	Delancey	7052024.002	Polished Chrome	72
No.	24" Towel Bar	7052024.013	Polished Nickel	100
1	Brass bar	7052024.295	Brushed Nickel	100
	All metal constructionConcealed mounting	7052024.278	Legacy Bronze	108
			MAI	P 🔝 🖉
	Delancey	7052190.002	Polished Chrome	41
an la construction de la constru	Towel Ring	7052190.013	Polished Nickel	57
	 7" (178 mm) diameter ring 	7052190.295	Brushed Nickel	57
	All metal constructionConcealed mounting	7052190.278	Legacy Bronze	62
			MAI) (SR) 🖉
	Delancey	7052210.002	Polished Chrome	31
T	Double Robe Hook	7052210.013	Polished Nickel	43
	 All metal construction 	7052210.295	Brushed Nickel	43
	Concealed mounting	7052210.278	Legacy Bronze	46
			Mai) îr 🖉
	Delancey	7052230.002	Polished Chrome	56
	Toilet Paper Holder	7052230.013	Polished Nickel	79
	All metal construction	7052230.295	Brushed Nickel	79
- 10	Concealed mounting	7052230.278	Legacy Bronze	85

American Standard

Town Square® S

Traditional Bathroom Accessories

	DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
	Town Square S 18" Towel Bar • Brass bar • All metal construction • Concealed mounting	7455018.002 7455018.013 7455018.295 7455018.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	62 85 85 92
			MA	P 🗊 🖉
	Town Square S 24" Towel Bar • Brass bar	7455024.002 7455024.013 7455024.295	Polished Chrome Polished Nickel Brushed Nickel	67 93 93
	All metal constructionConcealed mounting	7455024.278	Legacy Bronze	99
			MA	P 🖻 🖉
	Town Square S	7455190.002	Polished Chrome	39
	 Towel Ring 7" (178 mm) diameter ring 	7455190.013 7455190.295	Polished Nickel Brushed Nickel	54 54
	All metal construction Concealed mounting	7455190.278	Legacy Bronze	58
			MA	P 🔝 🖉
	Town Square S	7455210.002	Polished Chrome	28
	Double Robe Hook All metal construction	7455210.013 7455210.295	Polished Nickel Brushed Nickel	39 39
	Concealed mounting	7455210.278	Legacy Bronze	39
			MA	P 🖻 🖉
14	Town Square S	7455230.002	Polished Chrome	50
6	Toilet Paper Holder All metal construction	7455230.013 7455230.295	Polished Nickel Brushed Nickel	70 70
	Concealed mounting	7455230.278	Legacy Bronze	76
			MA	P SR 🖉
	Town Square S	7455260.002 7455260.013	Polished Chrome Polished Nickel	441
	Train Rack 24" (600 mm) length All metal construction Concealed mounting 	7455260.295 7455260.278	Brushed Nickel Legacy Bronze	617 617 661
			MA	P SR Ø

American Standard

TR Series

Traditional Bathroom Accessories

	DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
Co	TR Series 18" Towel Bar • Brass bar • All metal construction • Concealed mounting	8334018.002 8334018.295	Polished Chrome Brushed Nickel	58 82
Cito Cito	TR Series 24" Towel Bar • Brass bar • All metal construction • Concealed mounting	8334024.002 8334024.295	Polished Chrome Brushed Nickel	62 86
	TR Series Towel Ring • 7" (178 mm) diameter ring • All metal construction • Concealed mounting	8334190.002 8334190.295	Polished Chrome Brushed Nickel	36 50
	TR Series Double Robe Hook • All metal construction • Concealed mounting	8334210.002 8334210.295	Polished Chrome Brushed Nickel	27 38
the second	TR Series Toilet Paper Holder • All metal construction • Concealed mounting	8334230.002 8334230.295	Polished Chrome Brushed Nickel	47 67

American Standard



American Standard

Showering Options

Transform your shower into an experience. The **Spectra Versa**[™] **Retrofit Shower System** allows you to use your existing shower valve, so there is no need to drill or alter your plumbing. Spectra Versa is a great option for that quick shower overhaul you've been planning.



American Standard

Spectra Versa[™] Retrofit Shower System

30-Minute Makeover From Everyday Shower to Personal Spa Experience

Transform your shower into an experience, in minutes. Spectra Versa Retrofit allows you to use your existing shower valve, so there is no need to drill or alter your plumbing. Spectra Versa is a great option for that quick shower overhaul you've been planning.



Easy to Install Spectra Versa Retrofit eliminates the need to drill holes and damage tiles



AquaToggle™ Easily switch between four spray functions with one hand



Easy Glide Holder Adjust height and angle of hand shower for personal preference



3-Function Push-Button Diverter Switch between


shower for use alone or together



American Standard

Showering Options

The following pages contain the various components required to design a custom shower system. Use the steps below as a guide to select appropriate components.

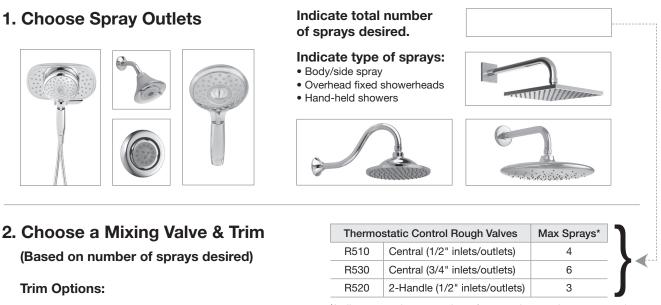

See pages 520-521 for all trim options.

*Indicates maximum number of sprays that can be on at one time.



3. Choose Appropriate Trim

Trim Options:

See pages 520-521 for all trim options.



4. Select Suitable Accessories

See pages 541.



1/2" Volume Control Valve
3/4" Volume Control Valve
Diverter Rough Valves
2-Way Diverter Valve – Discrete
2-Way Diverter Valve – Shared
3-Way Diverter Valve – Discrete
3-Way Diverter Valve – Shared

Must use separate volume control to control on/off function.



See pages: 536-538 for shower system kits.

American Standard

Custom Shower System – Worksheet

Water Pressure (psi) in your client's home:

(psi)

1. Determine what types of spray outlets your client wants

3. Identify what water control valves are needed to control the spray outlets

Use the wall valve flow rate chart below to identify the appropriate control valve for each spray outlet

Qty.	Spray Outlet	x	gpm	=	Required gpm	Qty	Control Valve*
	. Showerhead	x	2.5	=			
	Showerhead	^	2.5	_			
	Hand shower set	x	2.5	=			
	Hand shower on adjustable bar	x	2.5	=			
	Body sprays (sets of)	x	2.5	=			
	- Wall tub spout	x -		- =			
		x _		_ =			

2. Identify how many and what type of mixing valve(s) are needed to support the shower system

Total Flow Rate Requirement _____ gpm

Use the mixing valve flow rates chart below to identify how many valves are needed for the system

At	psi,

	Type of	of mixi	ng \	valve

___ Mixing Valve(s) is needed to support the shower system

Flow Rate Charts

Control Valve Flow Rates

Mixing Valve Flow Rates

	Toggle Between Spray Outlets		al On/Off pray Outlets	Toggle Between Spray Outlets			al On/Off pray Outlets
Water Pressure (psi)	2-3 Way Diverter R422S/R433S	1/2" On/Off R701	3/4" On/Off R711	Pressure Balance Mixing Valve RU101	1/2" 2-Handle Thermostatic Mixing Valve R520	1/2" Central Thermostatic Mixing Valve R510	3/4" Central Thermostatic Mixing Valve R530
20	6.3 gpm	7.0 gpm	10.0 gpm	3.4 gpm	4.1 gpm	8.0 gpm	14.0 gpm
40	9.0 gpm	10.0 gpm	13.0 gpm	4.9 gpm	5.9 gpm	9.5 gpm	16.0 gpm
60	10.9 gpm	11.0 gpm	15.0 gpm	6.0 gpm	7.3 gpm	10.5 gpm	17.0 gpm
80	12.5 gpm	12.5 gpm	16.0 gpm	6.9 gpm	8.5 gpm	12.0 gpm	18.0 gpm

Showering Options

American Standard

Shower Systems Trim Options at a Glance...

	Berwick®	Delancey®	Patience®	Portsmouth®	
	338-349	368-379	398-407	408-419	
Central Thermostatic Valve Trim Valve: R510 and R530					
2-Handle Thermostatic Valve Trim Valve: R520, R522 and R523					
On/Off Volume Control Valve Trim Valve: R701 and R711					
Diverter Valve Trim Valve: R422 and R433					

American Standard

Quentin®	Serin®	Studio [®] S	Times Square®	Town Square® S	Townsend®
420-431	442-455	456-467	468-479	480-491	492-503
		at and			

American Standard

Spectra[®] Shower Collection

Technology and Flexibility for Showering Perfection

The full Spectra Shower Portfolio offers flexibility along with total control. Technically advanced, functionally flexible and easy to install, you can choose the Spectra Showering System that will accommodate every member of the family, in the perfect style and finish.

Spectra Technology






Spectra eTouch®

Mount the waterproof remote anywhere in the shower. Simply click to experience and change the four spray patterns.


Spectra Touch®

Adjust the shower spray with a simple touch. Tap the outer ring of the 7"showerhead to change the four-function spray patterns.

Spectra Spray Patterns




Drench Full body coverage




Sensitive Gentle, soothing coverage



Jet Targeted coverage



Massage Pulsating coverage



PowerWash® Sweeping coverage

Spectra Collection

2019 Green GOOD DESIGN Award

American Standard

Shower Systems

Showering Options

DESCRIPTION		SKU #	COLOR/FINISH	LIST PRIC
 Spectra Versa[™] Shower System Ideal for light renovation Installation does not require breaking the wall Bundle consists of: 11" (279 mm) rain showerhead with pivot-able metal ball-joint (+/- 22°) 4-function hand shower 25" (635 mm) slide bar with Easy Glide tab 3-function push-button diverter (head/hand/combined) 15" (381 mm) shower arm 69" (1753 mm) metal shower hose 3M[®] adhesive tape and screws (optional) for easy installation* 5" (127 mm) Height Extension can be ordered separately (9035888) 2.5 gpm/9.5 L/min maximum flow 	NEW)	9035804.002 9035804.278 9035804.295	Polished Chrome Legacy Bronze Brushed Nickel	445 614 556
Spectra Versa Shower System • Same as 9035804 • 1.8 gpm/6.8 L/min maximum flow	CEG	9038804.002 9038804.278 9038804.295	Polished Chrome Legacy Bronze Brushed Nickel	445 614 556
 Spectra Versa 24" Fixed Shower System Ideal for light renovation Installation does not require breaking the wall Bundle consists of: 7" (178 mm) 4-function showerhead with pivot-able metal ball-joint (+/- 22°) 4-function hand shower 25" (635 mm) slide bar with Easy Glide tab 3-function push-button diverter (head/hand/combined) 69" (1753 mm) metal shower hose 3M adhesive tape and screws (optional) for easy installation 5" (127 mm) Height Extension can be ordered separately (9035888) Pull force up to 250 lbs, not suitable for grab bar purposes 1.8 gpm/6.8 L/min maximum flow 	CEG	9038824.002	Polished Chrome	365 ⁽¹⁾ ⁽³⁾ ⁽³⁾
 Spectra Versa 36" Fixed Shower System Ideal for light renovation Installation does not require breaking the wall Bundle consists of: 7" (178 mm) 4-function showerhead with pivot-able metal ball-joint (+/- 22°) 4-function hand shower 36" (914 mm) slide bar with Easy Glide tab 3-function push-button diverter (head/hand/combined) 69" (1753 mm) metal shower hose 3M adhesive tape and screws (optional) for easy installation 5" (127 mm) Height Extension can be ordered separately (9035888) 1.8 gpm/6.8 L/min maximum flow 	CEO	9038834.002	Polished Chrome	415 AP SR Q
Spectra Versa 5" Height Extension • 5" (127 mm) Height Extension for taller users	NEW	9035888.002 9035888.278 9035888.295	Polished Chrome Legacy Bronze Brushed Nickel	49 74 64

Showering Options

American Standard

*3M is a registered trademark of 3M Company.

2 in 1 Hand Showers


Showering Options

	DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICI
	Spectra Duo [®]	9035254.002	Polished Chrome	153
	2 in 1 Hand Shower	9035254.013	Polished Nickel	208
150	 9-1/2" (241 mm) easy clean showerhead 	9035254.278	Legacy Bronze	219
	sprayface	9035254.295	Brushed Nickel	208
··· (··· () ··· ··	 Single function fixed showerhead with 			
	drench spray			
	 5" (127 mm) easy clean hand shower spray 			
17	 4-function hand shower adjusts from drenc 	h to		
	sensitive to PowerWash® to massage			
	 Pressure-compensating flow control device Includes check valve 	1		
	 Includes 59" (1499 mm) metal hose 			
	Limited lifetime warranty		_	
	• 2.5 gpm/9.5 L/min maximum flow rate		MA	🤊 Ísrì 🖉
	Spectra Duo	9038254.002	Polished Chrome	153
	2 in 1 Hand Shower	9038254.013	Polished Nickel	208
	Certified by MPMO R&T • Same as 9035254	9038254.278	Legacy Bronze	219
	 1.8 gpm/6.8 L/min maximum flow 	9038254.295	Brushed Nickel	208
			INA	
				SH U

Fixed Showerheads

Spec	tra Fixed [®]		9035074.002	Polished Chrome	87
Fixed	I Showerhead		9035074.013	Polished Nickel	109
• 7" (*	178 mm) easy clean showerhead		9035074.278	Legacy Bronze	120
 4-fu to je Pres 	Inctions adjust from drench to sensitive et to massage ssure-compensating flow control device werhead only		9035074.295	Brushed Nickel	109
• Limi	gpm/9.5 L/min maximum flow rate ited lifetime warranty				
• Limi				MAP	SR .
LimiSho	ited lifetime warranty		9038074.002	MAP Polished Chrome	SR 87
• Limi • Sho Spec Fixed	ited lifetime warranty wer arm options on page 532	CEO	9038074.002 9038074.013		•.
• Limi • Sho Spec Fixed	ted lifetime warranty wer arm options on page 532 tra Fixed	CEO		Polished Chrome	SR 87 109 120

American Standard

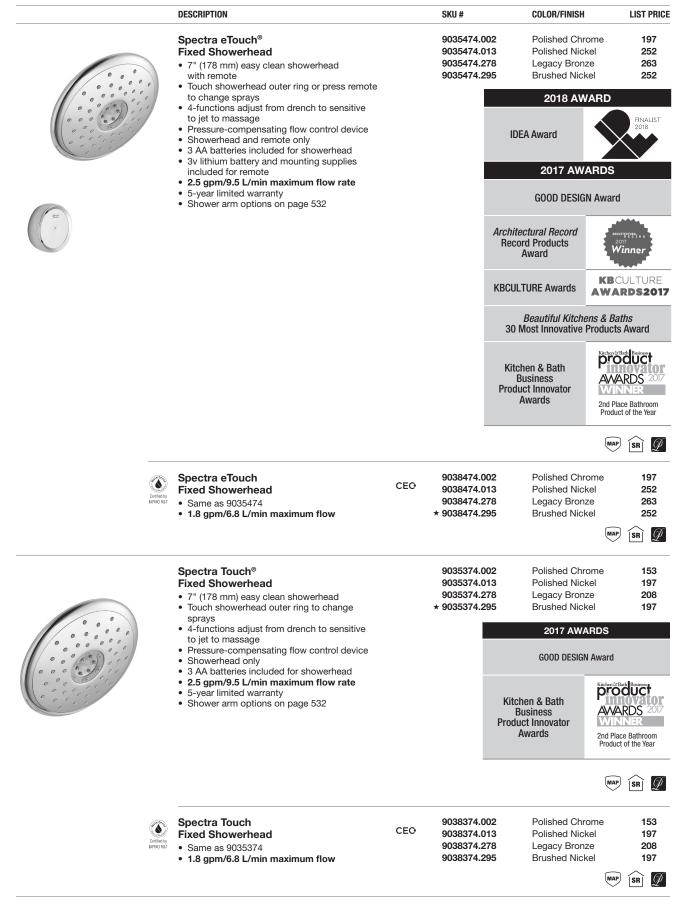



	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
	Spectra Fixed [®] Traditional Fixed Showerhead		9135073.002 9135073.013	Polished Chrome Polished Nickel	98 121
	 7-1/4" (184 mm) easy clean showerhead 		9135073.278	Legacy Bronze	131
	 4-functions adjust from drench to sensitive 		9135073.295	Brushed Nickel	121
	to jet to massage				
(· · · · · ·)	Pressure-compensating flow control device Showerboard and				
	 Showerhead only 2.5 gpm/9.5 L/min maximum flow rate 				
Con Contract	Limited lifetime warranty			MA	P 🗊 🖉
	Spectra Fixed Traditional		9138073.002	Polished Chrome	98
le l	Fixed Showerhead	CEO	9138073.013	Polished Nickel	121
Der JAP	MORAT • Same as 9135073		9138073.278	Legacy Bronze	131
	• 1.8 gpm/6.8 L/min maximum flow		9138073.295	Brushed Nickel	121
				ма	P SR Ø
	Town Square [®] S		1660516.002	Polished Chrome	83
	Fixed Showerhead		* 1660516.013	Polished Nickel	116
	Easy to clean		* 1660516.278	Legacy Bronze	125
	 6-1/4" (160 mm) single function showerhead Showerhead only 		* 1660516.295	Brushed Nickel	116
transfer a	 Showernead only Pressure-compensating flow control device 				<u> </u>
**************************************	• 2.5 gpm/9.5 L/min maximum flow rate				SR Ø
	Town Square S		* 1660515.002	Polished Chrome	83
	Fixed Showerhead	CEO	* 1660515.013	Polished Nickel	116
Cer IAP	MORAT • Same as 1660516		* 1660515.278	Legacy Bronze	125
	 1.8 gpm/6.8 L/min maximum flow rate 		* 1660515.295	Brushed Nickel	116
					SR Ø
	Townsend®		1660508.002	Polished Chrome	94
	Fixed Showerhead		1660508.013	Polished Nickel	133
	Easy to clean		* 1660508.278	Legacy Bronze	144
the second	6" (152 mm) diameter head		1660508.295	Brushed Nickel	133
A STATES	Showerhead onlyPressure-compensating flow control device				
	 2.5 gpm/9.5 L/min maximum flow rate 			_	~ ^ —
willfler	Shower arm options on page 532			MA	P SR Ø
(@	Townsend		1660509.002	Polished Chrome	94
Dat	Fixed Showerhead	CEO	* 1660509.013	Polished Nickel	133
IAP	• Same as 1660508		* 1660509.278	Legacy Bronze	144
	• 1.8 gpm/6.8 L/min maximum flow		* 1660509.295	Brushed Nickel	133 P îsri 🖉
	Fluent®		1660604.002	Polished Chrome	84
	Fixed Showerhead		* 1660604.278 * 1660604.295	Legacy Bronze Brushed Nickel	124 116
	 Easy to clean 7" (178 mm) diameter head 		^ 1000004.290	Drushed INICKEI	110
	Showerhead only				
	 Pressure-compensating flow control device 2.5 gpm/9.5 L/min maximum flow rate 				
	 2.5 gpm/9.5 L/min maximum flow rate Shower arm options on page 532 			MA	P 🗊 🖉
	Tluent		* 1660605.002	Polished Chrome	84
De	Fixed Showerhead	CEO	* 1660605.278	Legacy Bronze	124
	• Same as 1660604		* 1660605.295	Brushed Nickel	116
	• 1.8 gpm/6.8 L/min maximum flow			MA	



	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICI
	Tropic® Fixed Showerhead • Easy to clean • 4" (102 mm) diameter head • Showerhead only • Pressure-compensating flow control device • 2.5 gpm/9.5 L/min maximum flow rate • Shower arm options on page 532		1660620.002	Polished Chrome	74
	Easy Clean		8888075.002	Polished Chrome	⁹ SR 22 32
	 Fixed Showerhead Shower arm and flange 2.5 gpm/9.5 L/min maximum flow rate Shower arm options on page 532 				
Continued by Lephan Part	 Hydrofocus® 6-Function Showerhead Fixed Showerhead 4-1/2" (114 mm) diameter easy clean showerhead Adjusts from massage to full/massage combination to full spray to hydrofocus concentrating spray to hydrofocus/full combination to pause Pressure-compensating flow control device Showerhead only 2.0 gpm/2 61 (min maximum flow) 		1660206.002 1660206.295	Polished Chrome Brushed Nickel	50 67
	 2.0 gpm/7.6 L/min maximum flow Shower arm options on page 532 				SR Ø
	 Traditional 5-Function Showerhead Showerhead only Variable spray adjusts from full spray to full/ massage combination to pulsating massage to massage/mist combination to power mist 4-3/4" (121 mm) diameter showerhead Easy to clean spray face Pressure-compensating flow control device 2.5 gpm/9.5 L/min maximum flow rate Shower arm options on page 532 		* 1660625.295	Brushed Nickel	135
	 Patience[®] Showerhead Showerhead only 5" (127 mm) diameter easy clean showerhead Pressure-compensating flow control device 2.5 gpm/9.5 L/min maximum flow rate Shower arm options on page 532 		* 1660739.002 * 1660739.013 * 1660739.278 * 1660739.295	Polished Chrome Polished Nickel Legacy Bronze Brushed Nickel	87 122 131 122 P SR Ø
Certified by APMO R&T	Patience Showerhead • Same as 1660739 • 1.8 gpm/6.8 L/min maximum flow rate	CEO	* 1660738.002 * 1660738.013 * 1660738.278 * 1660738.295	Polished Chrome Polished Nickel Legacy Bronze Brushed Nickel	87 122 131 122
				MA	P SR Ø

American Standard

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
and a statis	 3-Function Showerhead Showerhead only 4-3/4" (121 nm) diameter easy clean showerhead Adjusts from gentle rain to hard rain to massage Pressure-compensating flow control device 		1660650.002 * 1660650.295	Polished Chrome Brushed Nickel	100 151
	 2.5 gpm/9.5 L/min maximum flow rate Shower arm options on page 532 			MAP	SR Ø
Central	 3-Function Showerhead Same as 1660650 1.8 gpm/6.8 L/min maximum flow 	CEO	1660652.002 * 1660652.295	Polished Chrome Brushed Nickel	100 151
				МАР	SRÌ 🖉
Control	FloWise [®] Modern 3-Function Water-Saving Showerhead • FloWise 3-function showerhead with 2.0 gpm/7.6 L/min maximum flow		* 1660613.002 * 1660613.295	Polished Chrome Brushed Nickel	83 124
	 Showerhead only Up to 40% water savings Three spray settings Turbine spray at 1.5 gpm maximum flow rate Full spray at 2.0 gpm maximum flow rate Combination spray at 2.0 gpm maximum flow rate Auto return feature defaults to 1.5 gpm ultra water-saving mode Angle adjustable 				
	 Pressure-compensating flow control device Shower arm options on page 532 				
Centif	FloWise Square 3-Function Water-Saving Showerhead		* 1660813.002 * 1660813.224	Polished Chrome Oil Rubbed Bronze	77 117
Entry of the second sec	 FloWise 3-function showerhead with 2.0 gpm/7.6 L/min maximum flow Showerhead only Up to 40% water savings Three spray settings Turbine spray at 1.5 gpm maximum flow rate Full spray at 2.0 gpm maximum flow rate Combination spray at 2.0 gpm maximum flow rate Auto return feature defaults to 1.5 gpm ultra water-saving mode Angle adjustable 		* 1660813.295	Brushed Nickel	117
	 Pressure-compensating flow control device Shower arm options on page 532 				SR Ø
Gen	 2.0 gpm/7.6 L/min maximum flow Showerhead only 		* 1660717.002 * 1660717.295	Polished Chrome Brushed Nickel	77 114
	 Up to 40% water savings Three spray settings Turbine spray at 1.5 gpm maximum flow rate Full spray at 2.0 gpm maximum flow rate Combination spray at 2.0 gpm maximum flow rate Auto return feature defaults to 1.5 gpm ultra water-saving mode 				
	 Angle adjustable Pressure-compensating flow control device Shower arm options on page 532 				SR Ø
	Transitional Vandal-Resistant 3-Function Water-Saving Showerhead		* 1660718.002	Polished Chrome	83
	Same as 1660717Lock in place with set screw				SR Ø



DESCRIPTION	SKU #	COLOR/FINISH	LIST PRIC
 FloWise® Traditional 3-Function Water-Saving Showerhead FloWise 3-function showerhead w 2.0 gpm/7.6 L/min maximum flo Showerhead only Up to 40% water savings Three spray settings Turbine spray at 1.5 gpm maxim Full spray at 2.0 gpm f flow rate Auto return feature defaults to 1.5 ultra water-saving mode Angle adjustable Pressure-compensating flow cont Shower arm options on page 532 	* 1660113.224 vith * 1660113.295 w num flow rate i flow rate maximum gpm rol device	Polished Chrome Oil Rubbed Bronze Brushed Nickel	74 111 111
 FloWise Square	1660811.002 CEO	Polished Chrome	54
 Water-Saving Showerhead FloWise single function showerhe 1.5 gpm/5.7 L/min maximum flo Showerhead only 40% water savings Turbine spray at maximum 1.5 gp Angle adjustable Pressure-compensating flow cont Showerhead only Shower arm options on page 532 	ads with w m flow rate rol device		
FloWise Transitional Water-Saving Showerhead • FloWise single function showerhe 1.5 gpm/5.7 L/min maximum flo • Showerhead only • 40% water savings • Turbine spray at maximum 1.5 gp • Angle adjustable • Pressure-compensating flow cont • Shower arm options on page 532	w m flow rate rol device	Polished Chrome	52
			SR Ø
FloWise Water-Saving Shower • FloWise single function showerhe 1.5 gpm/5.7 L/min maximum flo • Showerhead only • 40% water savings • Turbine spray at maximum 1.5 gp • Angle adjustable • Pressure-compensating flow cont • Shower are notions on page 532	ads with CEO w m flow rate rol device	Polished Chrome	28
 Shower arm options on page 532 			
FloWise Vandal-Resistant Water-Saving Showerhead	1660711.002	Polished Chrome	33
 Same as 1660710 Locks in place with set screw 			

American Standard

Showering Options

	DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
	Spectra Rain [®] Rain Showerhead • Showerhead only • 11" (280 mm) easy clean showerhead • Single function drench spray • Pressure-compensating flow control device • 2.5 gpm/9.5 L/min maximum flow rate • Shower arm options on page 532	9035001.002 9035001.013 9035001.278 9035001.295	Polished Chrome Polished Nickel Legacy Bronze Brushed Nickel	175 219 241 219
Confined by MANO RET	Spectra Rain Rain Showerhead • Same as 9035001 • 1.8 gpm/6.8 L/min maximum flow	CEO 9038001.002 9038001.013 9038001.278 9038001.295	Polished Chrome Polished Nickel Legacy Bronze Brushed Nickel	175 219 241 219 P SR Ø
	 10" (254 mm) Modern Rain Showerhead Showerhead only Easy clean showerhead Sleek, thin profile Brass construction Pressure-compensating flow control device 2.5 gpm/9.5 L/min maximum flow rate Shower arm options on page 532 	1660683.002 1660683.295	Polished Chrome Brushed Nickel	262 393
	 8" (200 mm) Rain Showerhead Showerhead only Easy clean showerhead Sleek, thin profile Pressure-compensating flow control device 2.5 gpm/9.5 L/min maximum flow rate Shower arm options on page 532 	1660527.002 1660527.295 1660527.243	Polished Chrome Brushed Nickel Matte Black	97 135 146
Calified by Reference to the Reference t	 8" (200 mm) Rain Showerhead Same as 1660527 1.8 gpm/6.8 L/min maximum flow 	CEO 1660528.002 1660528.295 1660528.243	Polished Chrome Brushed Nickel Matte Black	97 135 146 9 (SR) Ø
	 6-3/4" (171 mm) Modern Rain Showerhead Showerhead only Easy clean showerhead Sleek, thin profile Brass construction Pressure-compensating flow control device 2.5 gpm/9.5 L/min maximum flow rate Shower arm options on page 532 	1660681.002 * 1660681.295	Polished Chrome Brushed Nickel	149 208
	 10" (254 mm) Rain Showerhead Showerhead only Easy clean showerhead Brass construction 2.5 gpm/9.5 L/min maximum flow rate Shower arm options on page 532 	1660610.002 1660610.295	Polished Chrome Brushed Nickel	212 300
	 8" (203 mm) Rain Showerhead Showerhead only Easy clean showerhead Brass construction 2.5 gpm/9.5 L/min maximum flow rate Shower arm options on page 532 	1660680.002 * 1660680.295	Polished Chrome Brushed Nickel	157 234

★ DISCONTINUED. Available while supplies last.



Showering Options

		DESCRIPTION		SKU #	COLOR/FINISH	LIST PRIC
A		6" (152 mm) Rain Showerhead • Showerhead only • Easy clean showerhead • Brass construction • 2.5 gpm/9.5 L/min maximum flow rate		* 1660660.002 * 1660660.295	Polished Chrome Brushed Nickel	117 173
		Shower arm options on page 532			MAI) 🗊 🖉
		8" (203 mm) Square Rain Showerhead		1660688.002	Polished Chrome	206
		 Showerhead only 		* 1660688.013	Polished Nickel	288
A		Easy clean showerhead		* 1660688.278	Legacy Bronze	331
	7	 Sleek, thin profile Brass construction Pressure-compensating flow control device 2.5 gpm/9.5 L/min maximum flow rate Shower arm options on page 532 		1660688.295	Brushed Nickel	288 9 SR (
		8" (203 mm) Square Rain Showerhead	CEO	1660788.002 1660788.013	Polished Chrome Polished Nickel	206 288
	Certified by APMO R&T	 Same as 1660688 1.8 gpm/6.8 L/min maximum flow 		1660788.278	Legacy Bronze	200 331
	PIT NIG TIGH			1660788.295	Brushed Nickel	288
	AN AN	8" (203 mm) Square Rain Showerhead		* 1660513.002	Polished Chrome	97
¢Ψ.	Certified by	Showerhead only	CEO	1660513.075	Stainless Steel	135
1111111	Leroneo by IAPMO R&T	 Easy clean showerhead Sleek, thin profile Pressure-compensating flow control device 1.8 gpm/6.8 L/min maximum flow 		★ 1660513.295	Brushed Nickel	135
		 Shower arm options on page 532 				

Body Side Sprays

 Extender Round Body Spray Extender body sprays with f.5 gpm/5.7 L/min maximum flow Flush mount Easy to clean spray face Spray face automatically extends when water is turned on and retracts when water is turned off Three functions: widespray, massage and combination Adjustable angle Includes exclusive rough-in kit that must be inst during rough-in installation and before the wall in the specific section. 		1660130.002 ★ 1660130.013 ★ 1660130.278 1660130.295	Polished Chrome Polished Nickel Legacy Bronze Brushed Nickel	15 23 25 23
 Extender Square Body Spray Extender body sprays with 1.5 gpm/5.7 L/min maximum flow Flush mount Easy to clean spray face Spray face automatically extends when water is turned on and retracts when water is turned off Three functions: widespray, massage and combination Adjustable angle 	CEO	1660140.002 * 1660140.013 * 1660140.278 1660140.295	Polished Chrome Polished Nickel Legacy Bronze Brushed Nickel	15 23 25 23
Includes exclusive rough-in kit that must be inst during rough-in installation and before the wall i		d.	МАР	



Shower Arms

	DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
	Standard Shower Arm	1660240.002	Polished Chrome	25
	• 5-1/2" (140 mm) length	1660240.013	Polished Nickel	33
h. c	• 1/2" (13 mm) NPT	1660240.278 1660240.295	Legacy Bronze Brushed Nickel	39 33
		10002-10.250		00
	Modern Shower Arm	1660241.002	Polished Chrome	26
	• 5-1/2" (140 mm) length	1660241.013 * 1660241.278	Polished Nickel	33 39
*	• 1/2" (13 mm) NPT	* 1660241.278	Legacy Bronze Brushed Nickel	39
				Sn 2
	Townsend®	1660245.002	Polished Chrome	26
	Shower Arm and Flange	* 1660245.013	Polished Nickel	36
	• 5-1/2" (140 mm) length	* 1660245.278	Legacy Bronze Brushed Nickel	39
	• 1/2" (13 mm) NPT	1660245.295	Brushed Nickel	36
	3" (76 mm) Ceiling Mount	1660103.002	Polished Chrome	28
FIE	Rain Showerhead Arm	1660103.013 1660103.278	Polished Nickel Legacy Bronze	40 46
	 Brass construction 1/2" (13 mm) NPT thread 	1660103.295	Brushed Nickel	40
	6" (152 mm) Ceiling Mount	1660186.002	Polished Chrome	40
	Rain Showerhead Arm	1660186.013	Polished Nickel	55
	Brass construction	1660186.278	Legacy Bronze	84
	 1/2" (13 mm) NPT thread 	1660186.295	Brushed Nickel	55
				SR Ø
	12" (305 mm) Ceiling Mount	1660190.002	Polished Chrome	62
	Rain Showerhead Arm	★ 1660190.013 ★ 1660190.278	Polished Nickel	92
	 Brass construction 1/2" (13 mm) NPT thread 	* 1660190.278 1660190.295	Legacy Bronze Brushed Nickel	113 92
			MA	P (SR) 🖉
	12" (305 mm) Wall-Mount Right Angle	1660194.002	Polished Chrome	89
	Rain Showerhead Arm	* 1660194.013	Polished Nickel	134
a dia	 Brass construction 1/2" (13 mm) NPT thread 	★ 1660194.278 1660194.295	Legacy Bronze Brushed Nickel	165 134
))		1000134.233	Drushed Nicker	
			MA	srì 🖉
	18" (457 mm) Wall-Mount Right Angle	1660118.002	Polished Chrome	113
-	Rain Showerhead Arm Brass construction	1660118.013 ★ 1660118.278	Polished Nickel Legacy Bronze	157 193
	 Brass construction 1/2" (13 mm) NPT thread 	1660118.295	Brushed Nickel	157
				SRI Ø
	12" (305 mm) Wall-Mount	1660198.002	Polished Chrome	91
	Shepherd's Hook Rain Showerhead Arm	1660198.295	Brushed Nickel	136
	 Brass construction 1/2" (13 mm) NPT thread 			
			1000	



Hand Showers

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRIC
	Spectra Handheld® Hand Shower • Hand shower only – Requires hose and wall connection • 5" (127 mm) easy clean sprayface • 4-function sprays: drench, sensitive PowerWash® and massage • Pressure-compensating flow control device		9035154.002 9035154.013 9035154.278 9035154.295	Polished Chrome Polished Nickel Legacy Bronze Brushed Nickel	87 109 120 109
	 Includes check valve 2.5 gpm/9.5 L/min maximum flow rate 			MA	P SR 🖉
U Confinit by Definit by	Spectra Handheld Hand Shower	CEO	9038154.002 9038154.013 9038154.278	Polished Chrome Polished Nickel Legacy Bronze	87 109 120
PUBU PAT	 Same as 9035154 1.8 gpm/6.8 L/min maximum flow 		9038154.295	Brushed Nickel	109
	 Traditional 5-Function Hand Shower Hand shower only – Requires hose and wall connection Variable spray adjusts from full spray to full/ massage combination to pulsating massage to massage/mist combination to power mist Pressure-compensating flow control device Easy to clean spray face 4-3/4" (121 mm) face diameter 		* 1660627.002 * 1660627.295	Polished Chrome Brushed Nickel	102 144
	 Includes check valve 2.5 gpm/9.5 L/min maximum flow rate 			MA	P <u>S</u> R 🖉
	 3-Function Rain Hand Shower Hand shower only – Requires hose and wall connection 4-3/4" (121 mm) face diameter Easy to clean spray face Adjusts from gentle rain to hard rain to massage 		* 1660550.002 * 1660550.295	Polished Chrome Brushed Nickel	120 179
	 Pressure-compensating flow control device Includes check valve 2.5 gpm/9.5 L/min maximum flow rate 			MA	P (SR 🖉
K	 3-Function Modern Hand Shower Hand shower only – Requires hose and wall connection Variable spray adjusts from a conventional spray to a gentle aerated flow to a massage action Easy to clean spray face 		1660510.002	Polished Chrome	127
Ĩ.	 Pressure-compensating flow control device Includes check valve 2.5 gpm/9.5 L/min maximum flow rate 			MA	P <u>ß</u>
	3-Function Hand Shower With Pause Feature	ÂÂ	1660767.002 1660767.295	Polished Chrome Brushed Nickel	62 87
C C C C C C C C C C C C C C C C C C C	 Hand shower only – Requires hose and wall connection Variable spray adjusts from a conventional spray to a gentle aerated flow to a massage action Non-positive shut-off button on handle reduces flow to a trickle Pressure-compensating flow control device Includes check valve 2.5 gpm/9.5 L/min maximum flow rate 				
Cartilio day	3-Function Hand Shower With Pause Feature	CEO	1660766.002 1660766.295	Polished Chrome Brushed Nickel	62 87
Lenined by IAPMO R&T	 Same as 1660767 1.5 gpm/5.7 L/min maximum flow 	ADA			

American Standard

Hand Showers

					-
	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
	 Fixed Hand Shower Hand shower only – Requires hose and wall connection Fixed conventional spray Pressure-compensating flow control device Includes check valve 2.5 gpm/9.5 L/min maximum flow rate 		1660505.002	Polished Chrome	33 (SR) Ø
Centred by PHNO RBT	 Hydrofocus[®] 6-Function Hand Shower Hand shower only – Requires hose and wall connection 4-1/2" (114 mm) diameter easy clean face Adjusts from massage to full/massage combination to full spray to hydrofocus concentrating spray to hydrofocus/full combination to pause Pressure-compensating flow control device Includes check valve 2.0 gpm/7.6 L/min maximum flow rate 		1660207.002 1660207.295	Polished Chrome Brushed Nickel	78 103
Centre by Prive 3837	 Modern 3-Function Hand Shower Hand shower only – Requires hose and wall connection 4" (102 mm) diameter face Variable spray pattern Includes check valve 1.8 gpm/6.8 L/min maximum flow rate 	CEO	* 1660147.002 * 1660147.243 * 1660147.295	Polished Chrome Matte Black Brushed Nickel	56 85 79 P SR Ø
and the second s	 Personal Hand Shower Hand shower only – Requires hose and wall connection 1.8 gpm/6.8 L/min maximum flow rate 	CEO CEO	* 1660142.002 * 1660142.013 * 1660142.278 * 1660142.295	Polished Chrome Polished Nickel Legacy Bronze Brushed Nickel	98 137 149 137
	Minimalist Hand Shower • Single function • Easy to clean spray face • Includes check valve • 2.5 gpm/9.5 L/min maximum flow rate		1660506.002	Polished Chrome	120
Construction of the second sec	 Minimalist Hand Shower Hand shower only – Requires hose and wall connection Single function Easy to clean spray face Includes check valve 1.8 gpm/6.8 L/min maximum flow rate 	CEO	* 1660609.002 * 1660609.243 1660609.295	Polished Chrome Matte Black Brushed Nickel	120 179 167
	Square Minimalist Hand Shower • Hand shower only – Requires hose and wall connection • Single function • Easy to clean spray face • Includes check valve • 1.8 gpm/6.8 L/min maximum flow	CEO	1660608.002 * 1660608.013 * 1660608.278 1660608.295	Polished Chrome Polished Nickel Legacy Bronze Brushed Nickel	116 161 220 161





Hand Showers

		DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
So	Certified by RPMO R&T	 FloWise Modern Single Function Water-Saving Hand Shower Hand shower only – Requires hose and wall connection 40% water savings Turbine spray at maximum 1.5 gpm flow rate Pressure-compensating flow control device Includes check valve 1.5 gpm/5.7 L/min maximum flow rate 	CEO	* 1660641.002	Polished Chrome	77
						SR Ø
	Centified by RPMO R&T	 FloWise Square Single Function Water-Saving Hand Shower Hand shower only – Requires hose and wall connection 40% water savings Turbine spray at maximum 1.5 gpm flow rate Angle adjustable Pressure-compensating flow control device Includes check valve 	CEO	* 1660841.002	Polished Chrome	75
		 1.5 gpm/5.7 L/min maximum flow rate 				
PO	Certified by RAPMO R&T	 FloWise Transitional Single Function Water-Saving Hand Shower Hand shower only – Requires hose and wall connection 40% water savings Turbine spray at maximum 1.5 gpm flow rate Pressure-compensating flow control device Includes check valve 1.5 gpm/5.7 L/min maximum flow rate 	CEO	1660741.002	Polished Chrome	70
						SR Ø

American Standard

Slide Bar Kits

 DESCRIPTION	SKU #	COLOR/FINISH	LIST PRI
Spectra Handheld® Slide Bar Kit Complete kit includes: • 4-function Spectra Handheld 9035154 • Hose 8888035 • Wall supply 8888037 • 30" (762 mm) round slide bar 1660730 • Double check valves • 2.5 gpm/9.5 L/min maximum flow rate	1660775.002 1660775.013 1660775.278 1660775.295	Polished Chrome Polished Nickel Legacy Bronze Brushed Nickel	219 296 308 296
Spectra Handheld Slide Bar Kit Complete kit includes: • 4-function Spectra Handheld 9038154 • Hose 8888035 • Wall supply 8888037 • 30" (762 mm) round slide bar 1660730 • Double check valves • 1.8 gpm/6.8 L/min maximum flow	CEO 1660774.002 1660774.013 1660774.278 1660774.295	Polished Chrome Polished Nickel Legacy Bronze Brushed Nickel	219 296 308 296
Traditional Slide Bar Kit Complete kit includes: • Traditional handheld shower 1660142 • Traditional slide bar 1660773 • 60" Shower hose 8888035 • Wall supply 8888037 • Double check valves • 1.8 gpm/6.8 L/min maximum flow rate	CEO 1662607.002 1662607.013 1662607.278 1662607.295	Polished Chrome Polished Nickel Legacy Bronze Brushed Nickel	384 538 577 538
Times Square ^z Slide Bar Kit Complete kit includes: • Square hand shower • Hose 8888035	* 1662184.002 1662184.295	Polished Chrome Brushed Nickel) (SR) (2 350 489
 Square brass wall supply 8888069 30" (762 mm) square shower 1660230 slide bar Double check valves 2.5 gpm/9.5 L/min maximum flow rate 		(ma	
Serin [®] 3-Function Slide Bar Kit Complete kit includes: • 3-function adjustable hand shower 1660510 • Hose 8888035 • Wall supply 8888037 • Slide bar • Double check valves • 2.5 gpm/9.5 L/min maximum flow rate	2064724.002 2064724.295	Polished Chrome Brushed Nickel	334 501
		IMA	P SR Ø



Slide Bar Kits

DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
Rain 3-Function Slide Bar KitComplete kit includes:• Rain hand shower1660550• Hose8888035• Wall supply8888037• Standard slide bar1660225• Double check valves• 2.5 gpm/9.5 L/min maximum flow rate	1662551.002 1662551.295	Polished Chrome Brushed Nickel	325 487
Moments [®] Slide Bar Kit Complete kit includes: • Single function wand style 1660506 hand shower • Hose 8888035 • Wall supply 8888037 • Standard slide bar 1660225 • Double check valves • 2.5 gpm/9.5 L/min maximum flow rate	★ 1662605.002	Polished Chrome	290
Slide Bar Kit Complete kit includes: • Fixed hand shower 1660505 • Hose 8888035 • Wall supply 8888037 • Standard slide bar 1660225 • Double check valves • 2.5 gpm/9.5 L/min maximum flow rate	1662602.002	Polished Chrome	274
FloWise Modern Single Function Slide Bar Kit Complete kit includes: • FloWise single function hand shower • Hose • Wall supply • Standard slide bar • Double check valves • 1.5 gpm/5.7 L/min maximum flow rate	* 1662641.002 CEO	Polished Chrome	235
	Complete kit includes: 1660550 • Hose 8888035 • Wall supply 8888037 • Standard slide bar 1660225 • Double check valves • • Double check valves • • 2.5 gpm/9.5 L/min maximum flow rate Moments [®] Slide Bar Kit Complete kit includes: • Single function wand style 1660506 hand shower • Hose 8888035 • Wall supply 8888035 • Wall supply 8888037 • Standard slide bar 1660225 • Double check valves • • Double check valves • • Lose 888037 • Standard slide bar 1660505 • Hose 888037 • Standard slide bar 1660505 • Double check valves • 2.5 gpm/9.5 L/min maximum flow rate Imagend bar<	Complete kit includes: 1662551.295 • Rain hand shower 1660250 • Hose 8888037 • Standard slide bar 1660225 • Double check valves • 1660205 • Double check valves • 1660205 • Double check valves • 1660205 • Double check valves • 1660506 • Moments® Slide Bar Kit * 1662605.002 Complete kit includes: • 1660506 • Hose 888037 • Hose 888037 • Standard slide bar 1660225 • Double check valves • 2.5 gpm/9.5 L/min maximum flow rate Slide Bar Kit 1662602.002 Complete kit includes: • 1660505 • Hose 888033 • Standard slide bar 1660505 • Double check valves • 1660505 • Double check valves • 2.5 gpm/9.5 L/min maximum flow rate	Complete kit includes: 1662551.295 Brushed Nickel • Rain hand shower 1662551 Brushed Nickel • Vali supply 8888035 • Vali supply 8888035 • Vali supply 8888035 • Double check valves - • 2.5 gpm/9.5 L/min maximum flow rate * 1662605.002 Polished Chrome Moments [®] Slide Bar Kit * 1660205 Polished Chrome Complete kit includes: - * 1662605.002 Polished Chrome • Hose 888035 * 1662605.002 Polished Chrome • Kit 1660255 - Double check valves - • Vali supply 888037 - Standard slide bar 1660255 • Double check valves 1660255 - Polished Chrome Slide Bar Kit Complete kit includes: - - • Fixed hand shower 1660225 - Polished Chrome Standard slide bar 1660225 - Polished Chrome Standard slide bar 1660225 - - - • Side Bar Kit Complete kit includes: - - +

American Standard

Slide Bar Kits

Showering Options

	DESCRIPTION			SKU #	COLOR/FINISH	LIST PRICE
E Constant S	Water-Saving Modern 3-Functio Slide Bar Kit	n	CEO	1662647.002	Polished Chrome	277
RPAG NAT	Complete kit includes: • 3-function hand shower 4" (102 mm) diameter	1660147				
4) - p		8888035 8888068				
		1660330				
	• 1.8 gpm/6.8 L/min maximum flow r	rate				
					_	ר ה
					AM	P SR Q

Shower System Trim Kits

Shower System Trim Kit Complete kit includes: • Double Ceramic pressure-balan • 3-function ADA hand shower • Metal Hose • Wall supply • 36" (914 mm) standard slide bar • Reliant 3 [®] valve trim • In-line vacuum breaker • 2.5 gpm/9.5 L/min maximum flo • Rough valve not included	1660767 8888035 8888037 1660236 TU385500WD 1660400	TU662221.002	Polished Chrome	331
For use with Flash [®] shower rough-in	valves. See page 439 for	r details.		MAP

American Standard

Hand Shower Kits

Showering Options

	DESCRIPTION				SKU #	COLOR/FINISH	LIST PRICE
	HoseShower Arm BracketIncludes check valve		9035154 8888035 8888096 w rate		1660772.002 1660772.013 1660772.278 1660772.295	Polished Chrome Polished Nickel Legacy Bronze Brushed Nickel	131 175 208 175
Certified by LAPMO R&T	Spectra Handheld Hand Shower Kit Complete kit includes: • 4-function Spectra Hanc • Hose • Shower Arm Bracket • Includes check valve	dheld	9038154 8888035 8888096	CEO	1660771.002 1660771.013 1660771.278 1660771.295	Polished Chrome Polished Nickel Legacy Bronze Brushed Nickel	131 175 208 175
	Hose Wall supply Wall bracket	8888035 8888068 8888036	v rate	CEO	* 1662609.002 * 1662609.295 1662609.243	Polished Chrome Brushed Nickel Matte Black	248 347 373
	Centified by Burneo Rist	Hand Shower Kit Complete kit includes: • 4-function Spectra Hand • Hose • Shower Arm Bracket • Includes check valve • 2.5 gpm/9.5 L/min max Spectra Handheld Hand Shower Kit Complete kit includes: • 4-function Spectra Hand • Hose • Shower Arm Bracket • Includes check valve • 1.8 gpm/6.8 L/min max Hand Shower • Hand shower • Hand shower • Hose • Wall supply • Wall supply	Hand Shower Kit Complete kit includes: 4-function Spectra Handheld Hose Shower Arm Bracket Includes check valve 2.5 gpm/9.5 L/min maximum flow Spectra Handheld Hand Shower Kit Complete kit includes: 4-function Spectra Handheld Hose Shower Arm Bracket Includes check valve 1.8 gpm/6.8 L/min maximum flow Hand Shower Kit Complete kit includes: Hand Shower Kit Somer Arm Bracket Includes check valve 1.8 gpm/6.8 L/min maximum flow Hand Shower Kit Complete kit includes: Hand shower 1660609 Hose 8888035 Wall supply 8888035 Wall supply 8888036	Hand Shower Kit Complete kit includes: 4-function Spectra Handheld 9035154 Hose 888035 Shower Arm Bracket 888096 Includes check valve 888096 2.5 gpm/9.5 L/min maximum flow rate Spectra Handheld Hand Shower Kit Complete kit includes: 9038154 Hose 888035 Shower Arm Bracket 888035 Shower Arm Bracket 888096 Includes check valve 888096 Includes check valve 18 gpm/6.8 L/min maximum flow Hand Shower Kit Complete kit includes: 14.8 gpm/6.8 L/min maximum flow Hand Shower Xit Mand Shower Xit 0038154 Hand Shower Xit 888096 Uncludes check valve 1.8 gpm/6.8 L/min maximum flow Hand shower 1660609 Hose 8888035 Wall supply 8888068	Hand Shower Kit Complete kit includes: • 4-function Spectra Handheld 9035154 • Hose 8888035 • Shower Arm Bracket 8888096 • Includes check valve 825 gpm/9.5 L/min maximum flow rate CEO Spectra Handheld Hand Shower Kit CEO Complete kit includes: • 4-function Spectra Handheld 9038154 • Hose 8888035 8888035 • Shower Arm Bracket 8888036 8888096 • Includes check valve • Includes check valve CEO • Includes check valve • 1.8 gpm/6.8 L/min maximum flow CEO Hand Shower Kit CEO CEO Vall supply 8888035 Vall supply • Hose 8888035 Vall supply • Hose 8888035 Vall supply	Hand Shower Kit 1660772.013 Complete kit includes: 1660772.278 4-function Spectra Handheld 9035154 Hose 888035 Shower Arm Bracket 888096 Includes check valve 888096 2.5 gpm/9.5 L/min maximum flow rate 1660771.002 CEO 1660771.002 Mand Shower Kit CEO Complete kit includes: 1660771.278 Hose 888035 Shower Arm Bracket 888035 Shower Arm Bracket 9038154 Hose 888035 Shower Arm Bracket 888035 Shower Arm Bracket 888035 Shower Arm Bracket 888036 Includes check valve 1660771.295 Hand Shower Kit ECEO Complete kit includes: 1660609 Includes check valve 1662609.202 Hand shower 1660609 Hose 888035 Wall supply 8888035 Wall supply 8888036 Wall supply 8888036	Hand Shower Kit 1660772.013 Polished Nickel Complete kit includes: 4-function Spectra Handheld 9035154 1660772.278 Legacy Bronze Brushed Nickel 8888035 1660772.295 Brushed Nickel Legacy Bronze Shower Arm Bracket 8888096 1660772.295 Brushed Nickel Includes check valve 2.5 gpm/9.5 L/min maximum flow rate Polished Chrome Spectra Handheld 9038154 1660771.002 Polished Chrome Complete kit includes: 4-function Spectra Handheld 9038154 1660771.278 Legacy Bronze Hose 8888035 8888035 1660771.295 Polished Chrome Polished Nickel Hose 8888035 8888035 1660771.295 Brushed Nickel Legacy Bronze Hand Shower Kit 8888035 8888036 1660771.295 Brushed Nickel Hand Shower Kit 8888036 8888036 Polished Chrome CEO 1662609.295 Brushed Nickel Brushed Nickel Hand Shower 1660609 1662609.243 Polished Chrome Hand Shower 1660609 1662609.243 Brushed Nickel <

Slide Bars

	 30" (762 mm) Round Shower Slide Bar Adjustable gliding bracket for personal showers 	1660730.002 1660730.013 1660730.278 1660730.295	Polished Chrome Polished Nickel Legacy Bronze Brushed Nickel	8 10 12 10
	Traditional 30" (762 mm) Shower Slide Bar • Adjustable gliding bracket for personal showers	1660773.002 1660773.013 1660773.278 1660773.295	Polished Chrome Polished Nickel Legacy Bronze Brushed Nickel	SR 15 21 23 21
en e				



Slide Bars

	DESCRIPTION	SKU #	COLOR/FINISH	LIST PRIC
	 24" (610 mm) Standard Slide Bar Adjustable bracket for personal showers 	1660225.002 1660225.295	Polished Chrome Brushed Nickel	128 191
•	36" (914 mm) Standard Slide Bar • Adjustable bracket for personal showers	1660236.002 ★ 1660236.295	Polished Chrome Brushed Nickel) SR (2 138 209
			MAR	SR 🛛
	 30" (762 mm) Square Slide Bar Adjustable bracket for personal showers Matching square wall brackets 	1660230.002 * 1660230.013 * 1660230.278 * 1660230.295	Polished Chrome Polished Nickel Legacy Bronze Brushed Nickel	258 362 408 362
		400000 000		
8 4 (मा	 30" (762 mm) Round Slide Bar Adjustable bracket for personal showers Round wall flange 	1660330.002	Polished Chrome	162
e			MAF	



Shower System Accessories

	DESCRIPTION	SKU #	COLOR/FINISH	LIST PRIC
	Metal Shower Hose • 59" (1499 mm) long	8888035.002 8888035.013 8888035.243	Polished Chrome Polished Nickel Matte Black	62 86 92
		8888035.278 8888035.295	Legacy Bronze Brushed Nickel	92 86
6				SR Ø
	Metal Shower Hose 79" (2006 mm) long 	8888053.002	Polished Chrome	73 SR Ø
	1/2" (13 mm) NPT In-Line	1660400.002	Polished Chrome	45
	Vacuum Breaker	1660400.013	Polished Nickel	62
	 Attaches between supply outlet 	1660400.278	Legacy Bronze	72
	and personal shower hose	1660400.295	Brushed Nickel	62
				SR Ø
200	Shower Arm Bracket	8888096.002	Polished Chrome	21
	Angle adjustableMetal ball joint	8888096.013 8888096.278	Polished Nickel Legacy Bronze	29 33
	• 1/2" (13 mm) NPT	8888096.295	Brushed Nickel	29
				SR Ø
	Fixed Wall Bracket	8888036.002	Polished Chrome	27
	 For use with personal showers 	8888036.013	Polished Nickel	38
		8888036.243 8888036.278	Matte Black Legacy Bronze	40 40
		8888036.295	Brushed Nickel	38
			MAI	
	Wall Supply	8888037.002	Polished Chrome	43
	 1/2" (13 mm) female thread NPT 	* 8888037.013	Polished Nickel	60
	 1/2" (13 mm) NPSM male hose thread Includes check valve 	8888037.243	Matte Black	65
	 Includes check valve 	8888037.278 8888037.295	Legacy Bronze Brushed Nickel	65 60
		000001.200	_	
			MAI	sr 🖉
	Round Wall Supply	8888068.002 8888068.243	Polished Chrome Matte Black	54 82
	 1/2" (13 mm) female thread NPT 1/2" (13 mm) NPSM male hose thread 	8888068.295	Brushed Nickel	76
	 Includes check valve 			
	Square Wall Supply	8888069.002	Polished Chrome	78
	 1/2" (13 mm) female thread NPT 1/2" (13 mm) NPSM male hose thread 	8888069.013 * 8888069.278	Polished Nickel Legacy Bronze	111 144
	 Includes check valve 	8888069.295	Brushed Nickel	144
			MAI	
	Wall Supply Bracket	8888038.002	Polished Chrome	75
	 1/2" (13 mm) female thread NPT 	8888038.295	Brushed Nickel	113
The state	 1/2" (13 mm) NPSM male hose thread 			
	 1/2" (13 mm) NPSM male nose thread Includes check valve 			

American Standard

	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
	Berwick [®] Slip-On Diverter Tub Spout • For 1/2" (13 mm) copper pipe • 4-7/8" (124 mm) length to center of spout outlet	CEO	* 8888743.002 * 8888743.295	Polished Chrome Brushed Nickel	92 130
44.0				MAP	Ísrì 🖉
	Delancey [®] Slip-On Diverter Tub Spout	CEO	8888105.002 8888105.295	Polished Chrome Brushed Nickel	97 136
	 For 1/2" (13 mm) copper pipe 8-1/8" (207 mm) length to center of spout outlet 		8888105.013 8888105.278	Polished Nickel Legacy Bronze	136 147
				MAP	SR Ø
	Delancey IPS Diverter Tub Spout	CEO	8888104.002 8888104.295	Polished Chrome Brushed Nickel	97 136
	 For 1/2" (13 mm) IPS connection 8-1/8" (207 mm) length to center of spout outlet 		8888104.013 8888104.278	Polished Nickel Legacy Bronze	136 147
	Delancey		8888107.002	Polished Chrome	87
	 Slip-On Non-Diverter Tub Spout For 1/2" (13 mm) copper pipe 		8888107.295 8888107.013	Brushed Nickel Polished Nickel	122 122
	8-1/8" (207 mm) length to center of spout outlet		8888107.278	Legacy Bronze	131
				мар	Ísrì 🖉
	Delancey IPS Non-Diverter Tub Spout		8888106.002 8888106.295	Polished Chrome Brushed Nickel	87 122
	 For 1/2" (13 mm) IPS connection 8-1/8" (207 mm) length to center of spout outlet 		8888106.013 8888106.278	Polished Nickel Legacy Bronze	122 131
				MAP	
	Deluxe 4" (102 mm) Diverter Tub Spout	CEO	8888055.002 8888055.295	Polished Chrome Brushed Nickel	43 60
	• 1/2" (13 mm) IPS connection		000003.235		00
P	Deluxe 5-1/8" (130 mm) Brass Diverter Tub Spout	CEO	8888022.002	Polished Chrome	101
	 1/2" (13 mm) IPS connection 			MAP	SR Ø
	Fluent® Slip. On Divortor Tub Spout	CEO	8888009.002 * 8888009.295	Polished Chrome Brushed Nickel	86 120
	Slip-On Diverter Tub Spout For 1/2" (13 mm) copper pipe 6 1/2" (165 mm) longth to conter of spout outlet		* 8888009.278	Legacy Bronze	120
	6-1/2" (165 mm) length to center of spout outlet			MAP	SR Ø
	Fluent IPS Diverter Tub Spout	CEO	* 8888019.002 * 8888019.295	Polished Chrome Brushed Nickel	86 120
	 Quality all metal tub spout Quality all metal tub spouts offered in a number of styles, sizes and installation options 		* 8888019.278	Legacy Bronze	120
	or styles, sizes and installation options				



	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRIC
	Fluent [®] Slip-On Non-Diverter Tub Spout • For 1/2" (13 mm) copper pipe • 6-1/2" (165 mm) length to center of spout outlet		* 8888049.002 * 8888049.295 * 8888049.278	Polished Chrome Brushed Nickel Legacy Bronze	79 112 120
				МАР	SR Q
	Fluent Ips Non-Diverter Tub Spout • 1/2" (13 mm) IPS connection		* 8888099.002 * 8888099.295 * 8888099.278	Polished Chrome Brushed Nickel Legacy Bronze	79 112 115
	6-1/2" (165 mm) length to center of spout outlet			МАР	SR Ø
	Patience [®] Slip-On Diverter Tub Spout • For 1/2" (13 mm) copper pipe	CEO	8888101.002 * 8888101.013 8888101.295	Polished Chrome Polished Nickel Brushed Nickel	67 92 92
			* 8888101.278	Legacy Bronze	99 Sr 🖉
	Portsmouth [®] Slip-On Diverter Tub Spout • Quality all metal tub spouts offered in a number of styles, sizes and installation options	CEO	* 8888730.002 * 8888730.295	Polished Chrome Brushed Nickel	42 58
	 For 1/2" (13 mm) copper pipe 			MAP	SR Ø
	Quentin [®] Slip-On Diverter Tub Spout • For 1/2" (13 mm) copper pipe	CEO	* 8888094.002 * 8888094.295	Polished Chrome Brushed Nickel	69 96
				MAP	SR Ø
-	Serin [®] Brass Tub Spout • 1/2" (13 mm) IPS connection • 6-3/4" (171 mm) length to center of spout outlet		8888421.002 * 8888421.295	Polished Chrome Brushed Nickel	118 165
				MAP	SR Ø
	Serin Slip-On Diverter Tub Spout • For 1/2" (13 mm) copper pipe • 4-7/8" (124 mm) length to center of spout outlet	CEO	8888087.002 * 8888087.295	Polished Chrome Brushed Nickel	90 127
Y				MAP	
	Slip-On Non-Diverter Tub Spout For 1/2" (13 mm) copper pipe 		8888056.002	Polished Chrome	33
	Slip-On 4" (102 mm) Diverter Tub Spout • For 1/2" (13 mm) copper pipe	CEO	8888026.002	Polished Chrome	33



	DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
a a	Studio [®] S Slip-On Diverter Tub Spout • Metal construction • For 1/2" (13 mm) copper pipe • 6" (152 mm) length to center of spout outlet	CEO	8888318.002 8888318.295 8888318.243	Polished Chrome Brushed Nickel Matte Black	88 123 132 (SR)
Ψ	Studio S IPS Diverter Tub Spout • Metal construction • 1/2" (13 mm) IPS connection • 6" (152 mm) length to center of spout outlet	CEO	8888319.002 8888319.295 8888319.243	Polished Chrome Brushed Nickel Matte Black	88 123 132 (SR)
(E)	Studio S Slip-On Non-Diverter Tub Spout • Metal construction • For 1/2" (13 mm) copper pipe • 6" (152 mm) length to center of spout outlet		8888316.002 8888316.295 8888316.243	Polished Chrome Brushed Nickel Matte Black	83 116 124 SR Ø
	Studio S IPS Non-Diverter Tub Spout • Metal construction • 1/2" (13 mm) IPS connection • 6" (152 mm) length to center of spout outlet		8888317.002 8888317.295 8888317.243	Polished Chrome Brushed Nickel Matte Black	83 116 124 SR 2
	Times Square [®] Slip-On Diverter Tub Spout • For 1/2" (13 mm) copper pipe • 4-7/8" (124 mm) length to center of spout outlet	CEO	8888097.002 * 8888097.295	Polished Chrome Brushed Nickel	92 130
	Town Square [®] S Slip-on Diverter Tub Spout • For 1/2" (13 mm) copper pipe • 6-3/4" (171 mm) length to center of outlet	CEO	8888109.002 8888109.295 8888109.013 8888109.278	Polished Chrome Brushed Nickel Polished Nickel Legacy Bronze	111 155 155 166 SR 2
	Town Square S IPS Diverter Tub Spout • 1/2" (13 mm) IPS connection • 6-3/4" (171 mm) length to center of outlet	CEO	8888108.002 8888108.295 8888108.013 8888108.278	Polished Chrome Brushed Nickel Polished Nickel Legacy Bronze	111 155 155 166 (SR)
	Town Square [®] S Slip-on Non-Diverter Tub Spout • For 1/2" (13 mm) copper pipe • 6-3/4" (171 mm) length to center of outlet		8888111.002 8888111.295 8888111.013 8888111.278	Polished Chrome Brushed Nickel Polished Nickel Legacy Bronze	99 139 139 150 SR Ø
	Town Square S IPS Non-Diverter Tub Spout • 1/2" (13 mm) IPS connection • 6-3/4" (171 mm) length to center of outlet		8888110.002 8888110.295 8888110.013 8888110.278	Polished Chrome Brushed Nickel Polished Nickel Legacy Bronze	99 139 139 150 SR 2



Showering Options

DESCRIPTION		SKU #	COLOR/FINISH	LIST PRICE
Townsend®		8888093.002	Polished Chrome	85
Slip-On Diverter Tub Spout	CEO	8888093.013	Polished Nickel	119
 For 1/2" (13 mm) copper pipe 		8888093.295	Brushed Nickel	119
• 6-1/2" (165 mm) length to center of spout outlet		8888093.278	Legacy Bronze	128
Townsend IPS Diverter Tub Spout	CEO	8888098.002 8888098013	Polished Chrome Polished Nickel	85 119
•		8888098.295	Brushed Nickel	119
 6-1/2" (165 mm) length to center of spout outlet 		8888098.278	Legacy Bronze	128
			МАР) <u>S</u> R 🖉
	Townsend [®] Slip-On Diverter Tub Spout • For 1/2" (13 mm) copper pipe • 6-1/2" (165 mm) length to center of spout outlet Townsend IPS Diverter Tub Spout • 1/2" (13 mm) IPS connection	Townsend® CEO Slip-On Diverter Tub Spout CEO • For 1/2" (13 mm) copper pipe • 6-1/2" (165 mm) length to center of spout outlet Townsend CEO IPS Diverter Tub Spout CEO • 1/2" (13 mm) IPS connection CEO	Townsend® Slip-On Diverter Tub Spout CEQ 8888093.002 • For 1/2" (13 mm) copper pipe 6-1/2" (165 mm) length to center of spout outlet 888093.295 • 6-1/2" (165 mm) length to center of spout outlet 8888093.278 Townsend R888093.278 IPS Diverter Tub Spout CEQ 8888093.002 • 1/2" (13 mm) IPS connection CEQ 8888093.278	Townsend® CEO 8888093.002 Polished Chrome Slip-On Diverter Tub Spout EEO 8888093.013 Polished Nickel • For 1/2" (13 mm) copper pipe 8688093.295 Brushed Nickel Brushed Nickel • 6-1/2" (165 mm) length to center of spout outlet 8888093.278 Polished Chrome Townsend EEO 8888098.002 Polished Chrome IPS Diverter Tub Spout CEO 8888098.002 Polished Chrome • 1/2" (13 mm) IPS connection CEO 8888098.002 Polished Chrome

Drains and P-Traps

Parts

Showering Options/Parts

	DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
	Push Pop-up Drain With Overflow • 1-1/4" (32 mm) tailpiece	8888095.002 8888095.013 8888095.295 8888095.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	51 72 72 77
	Push Pop-up Drain Without Overflow • 1-1/4" (32 mm) tailpiece	8888112.002 8888112.013 8888112.295 8888112.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	51 72 72 77
•	 Drain Tailpiece 1-1/4" (32 mm) diameter Compatible with all American Standard drains 	8888113.013 8888113.295 8888113.278	Polished Nickel Brushed Nickel Legacy Bronze	29 29 31
	 Decorative P-Trap 1-1/4" (32 mm) diameter slip fit inlet Brass construction Removable trap eye for easy cleaning 	8888114.002 8888114.013 8888114.295 8888114.278	Polished Chrome Polished Nickel Brushed Nickel Legacy Bronze	179 251 251 270
	 Decorative P-Trap Fully plated drain with 17 gauge tube 1-1/4" x 1-1/4" trap with 9" drain tube Includes flange and reducer seal to attach 1-1/4" drain tube to 1-1/2" wall drain IAPMO (UPC) Approved Fits most standard bathroom sinks No special tools required for installation 	7720018.002 7720018.295	Polished Chrome Brushed Nickel	121 169

American Standard

Lavatory Faucets

-				
	DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
	 Extension Kit Extends Shank 2-1/4" (57 mm) For use on: 4" (102 mm) centersets with 1/2" (13 mm) male inlet shanks Top mount kitchens with 1/2" (13 mm) male inlet shanks 	⊳M960131-0070A		35
	Pressure-Compensating Vandal-Resistant Aerator With Key • 15/16" (8 mm) male threads • 1.5 gpm/5.7 L/min maximum	⊳M922887-0020A	Polished Chrome	16
	Pressure-Compensating Vandal-Resistant Aerator With Key • 55/64" (21 mm) female threads • 1.5 gpm/5.7 L/min maximum	⊳M922888-0020A	Polished Chrome	14
	 Pressure-Compensating Aerator 15/16" (24 mm) male threads 1.0 gpm/3.8 L/min maximum 	⊳M922991-0020A ⊳M922991-2240A ⊳M922991-2950A	Polished Chrome Oil Rubbed Bronze Brushed Nickel	6 12 9
	 Pressure-Compensating Aerator 55/64" (21 mm) female threads 1.0 gpm/3.8 L/min maximum 	⊳M922992-0020A	Polished Chrome	6
	Pressure-Compensating Vandal-Resistant Aerator With Key • 15/16" (24 mm) male threads • 1.0 gpm/3.8 L/min maximum	⊳M922996-0020A	Polished Chrome	16
	Pressure-Compensating Vandal-Resistant Aerator With Key • 55/64" (21 mm) female threads • 1.0 gpm/3.8 L/min maximum	⊳M922997-0020A	Polished Chrome	16
\bigcirc	Pressure-Compensating Non-Aerated Spray • 15/16" (24 mm) male threads • 0.5 gpm/1.9 L/min maximum	⊳M922901-0020A	Polished Chrome	8
	Pressure-Compensating Non-Aerated Spray • 55/64" (21 mm) female threads • 0.5 gpm/1.9 L/min maximum	⊳M922903-0020A ⊳M922903-2950A	Polished Chrome Brushed Nickel	9 12
	Pressure-Compensating Vandal Resistant Non-Aerated Spray With Key • 15/16" (24 mm) male threads • 0.5 gpm/1.9 L/min maximum	⊳066508-0020A	Polished Chrome	16
9 🖪	Pressure-Compensating Vandal Resistant Non-Aerated Spray With Key • 55/64" (21 mm) female threads • 0.5 gpm/1.9 L/min maximum	⊳066074-0020A	Polished Chrome	16

▷ Parts Program (Non-Premier)

Flash® Rough-In Valves

	DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
	 Pressure Balance Valve Deep Rough-in Kit For TU series Colony[®] PRO trim kits used in conjunction with Flash shower rough-in valves Provides additional 3/4" (19 mm) rough-in depth Includes two 4" (102 mm) screws for trim kit installation and handle adaptor screw 	M970649-0020A M970649-2950A M970649-2780A	Polished Chrome Brushed Nickel Legacy Bronze	36 40 44
	 Double Ceramic Pressure Balance Cartridge For Use With All Flash Shower Rough-in Valves Includes removal ring to aid in removing cartridge from valve Cartridge ships standard with TU Series bath/shower trim kits 	M970410-0070A	N/A	71
0	Removal Ring Aids in removing cartridge from valve 	M970648-0070A	N/A	5
Ø	Retaining Ring For use with all Flash shower rough-in valves Made of stainless steel Secures cartridge/test cap to valve body 	M970452-0070A	N/A	9
	Screwdriver StopsSet of twoFor use with all Flash shower rough-in valves	M970451-0070A	N/A	13
	 Flush Plug For use with all Flash shower rough-in valves Allows the installer to flush the hot and cold lines independently 	M954334-0070A	N/A	5
	 Conversion Kit for TRIMendous[®] Trim Kits Converts TRIMendous trim kits to work with all Flash shower rough-in valves For use with the following T series trim kits: Berwick[®], Colony PRO, Edgemere[®], Fluent[®], Patience[®], Serin[®], Studio[®] S, Times Square[®], Town Square[®] S, Townsend[®] NOT for use with the following TRIMendous trim kits: Portsmouth[®], Quentin[®], Reliant 3[®], Town Square (T555520 series), Colony Soft[®], Seva[®], Studio 	M970645-0070A	N/A	71
8 9	Locking Cam Screw Set Set of two Used for thin wall applications For use with all Flash shower rough-in valves 	M970453-0070A	N/A	9
	Flash Removal Tool • Tool to help remove retaining ring on Flash shower valves	M970652-0070A	N/A	49

Parts

Parts

Cartridges and Rough-in Kits

	DESCRIPTION	SKU #	COLOR/FINISH	LIST PRICE
	Temperature Control Pressure Balance Valve Cartridge • For bath/shower pressure balance valves • Ships standard with R111 series valves	⊳ A954440-0070A	NA	35
	Volume and Temperature Control Pressure Balance Valve Cartridge • For bath/shower pressure balance valves • Ships standard with R121 series valves	⊳023529-0070A	NA	24
	 Back-to-Back Volume and Temperature Control Pressure Balance Valve Cartridge For bath/shower pressure balance valves Works with R121 valves For use in back-to-back installations to reverse hot and cold lines without removing R121 series rough valve body 	⊳952377-0070A	NA	26
000	 Volume and Temperature Control Pressure Balance Valve Cartridge For bath/shower pressure balance valves Ships standard with R111/R121 series valves 	⊳ M952100-0070A	NA	29
	 Modernization Plate For all trim kits used in conjunction with RU series valves 	⊳ м961819-0020А ⊳ м961819-2950А		62 71
	 Deep Rough-In Kit For single control pressure balance bath/showers For all trim kits used in conjunction with R111 or R121 series valves Includes hardware to provide an additional 3/4" (19 mm) rough-in depth 	▷ M961818-0020A ▷ M961818-2240A ▷ M961818-2950A	Oil Rubbed Bronze	35 41 38
	 Deep Rough-In Kit For single control pressure balance bath/showers For all trim kits used in conjunction with R116SS or R126SS Includes hardware to provide an additional 3/4" (19 mm) rough-in depth 	⊳ м962818-0020А ⊳ м962818-2950А		48 56

▷ Parts Program (Non-Premier)

Parts

American Standard

Rough-in Kits

Parts

 DESCRIPTION	SKU # COLOR/FINISH	LIST PRICE
 Deep Rough-In Kit For Colony[®] Soft 2-handle bath/shower (metal lever handle) Includes hardware to provide an additional 3/4" (19 mm) rough-in depth 	⊳ M962262-0070A	30
 Deep Rough-In Kit For Colony[®] Soft 3-handle bath/shower (metal lever handle) Includes hardware to provide an additional 3/4" (19 mm) rough-in depth 	⊳ M962263-0070A	86
Thermostat and Volume Control Valve Deep Rough-In Kit • For use with R500 series thermostatic valves • Maximum 3/4" (19 mm) extension	 > 963434-0020A > 963434-2240A > 963434-2950A 	132 150 168
 Thermostat and Volume Control Valve Deep Rough-In Kit For use with R700 series on/off volume control valves Maximum 3/4" (19 mm) extension 	⊳066078-0070A	74
Diverter Deep Rough-In Kit For use with R422 and R433 valves Maximum 3/4" (19 mm) extension 	D 963554-0020A D 963554-2240A D 963554-2950A	35 65 42

▷ Parts Program (Non-Premier)

American Standard

Faucet Modifications – How to Order

ORDERING

- Special Manufacturing or Modification requests can be made through your sales rep or customer care
- You will need to provide basic information regarding the request for review by category and manufacturing teams

PRICING

• Pricing will be provided by sales rep after review of request

CONDITIONS

- Some modifications may not be feasible. Each request will be reviewed by category and manufacturing
- Order minimum: 100 pieces. Exceptions will be considered on large job quotes
- A one-time setup charge may be applied to modification

Faucet Aerator Cross Reference – Kitchen Faucet Aerators

• Select the appropriate aerator for your faucet using these aerator cross reference charts.

• See page 546 for aerator list prices.

Name	Series	Available Finishes	Aerator Type	1.5 gpm (5.7 L/min
Avery®	4901	002, 075	N/A	N/A
Beale®	4931.002	002, 075	N/A	N/A
Colony [®] Choice	4175.700	002, 075	Male	M922887
Colony [®] PRO	7074	002, 075	N/A	N/A
	2475.500/550		Female	M922888
Colony [®] Soft	4175 & 4275	002, 075	Male	M922887
	4175.100/300		N/A	N/A
D 1 0	4279.300/400/710	000 010 075 070	N/A	N/A
Delancey®	4279.410	002, 013, 075, 278	Male	M922917
Edgewater™	4932	002, 075	N/A	N/A
	7293 & 7298	000	Female	M922888
Heritage®	7295	002	Male	M922887
Pekoe®	4332	002, 075	N/A	N/A
D	4285.051/100/300/410/420/551	000 075 004	N/A	N/A
Portsmouth®	4285.001/501	002, 075, 224	N/A	N/A
o ·	4433.001	000 075 004	N/A	N/A
Quince®	4433.100/300/350/410	002, 075, 224	N/A	N/A
	4205.00x	002	Male	M922887
Reliant+®	4205.104	002, 075	N/A	N/A
	4803100			N/A
	4803300/350	000.075.040	Mala	N/A
Studio [®] S	4803410	002, 075, 243	Male	M922909
	4803900			N/A
		1		1

Additional modifications available.

American Standard

Faucet Aerator Cross Reference – Lavatory Faucet Aerators

Select the appropriate aerator for your faucet using these aerator cross reference charts.

• See page 546 for aerator list prices.

Name	Series	Aerator Type	Available Finishes	0.5 gpm (1.9 L/min) PCA Spray	0.5 gpm (1.9 L/min) Vandal- Resistant PCA Spray	1.0 gpm (3.8 L/min) PCA Aerator	1.0 gpm (3.8 L/min) Vandal- Resistant PCA Aerator	1.2 gpm (4.5 L/min) Vandal- Resistant PCA Aerator
David al @	7430.101/151/152	De suder Mele	000.005	M922901	N/A	M922991	N/A	N/A
Berwick®	7430.451/801	Regular Male	002, 295	N/A	N/A	N/A	N/A	N/A
	7075.0XX			N/A	M922917	N/A	N/A	N/A
Colony [®] PRO	7075.1XX/80X	Slim	Plain, no finish	N/A	M922917	N/A	N/A	N/A
	7075.20X		-	N/A	N/A	M923845	N/A	N/A
	2175 & 2275	Regular Female	000.075	M922903	066074	M922992	M922997	M923812
Colony [®] Soft	3875	Regular Male	002, 075	M922901	066508	M922991	M922996	M923811
Delancey®	7052.107/2X7/8X7	Slim	Plain, no finish	N/A	N/A	M923845	N/A	N/A
	7186.2XX/8XX	Slim	Plain, no finish	N/A	M922917	N/A	N/A	N/A
Fluent®	7186.10X	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Patience®	7106.80X/10X/152	Slim	Plain, no finish	N/A	N/A	M923845	N/A	N/A
Portsmouth	7420 & 7415	Regular Male	002, 224, 295	M922901	066508	M922991	M922996	M923811
Quentin®	7440	Regular Male	002, 224, 295	M922901	N/A	M922991	N/A	N/A
Reliant 3®	7385	Regular Male	002, 295	M922901	066508	M922991	M922996	M923811
	2064.101/151/152	D 1 M 1	000.005	M922901	066508	M922991	M922996	M922811
• • •	2064.13X	Regular Male	002, 295	M922901	N/A	M922991	N/A	N/A
Serin®	2064.451/461	Caché Thumb	Plain, no finish	N/A	N/A	M922998	M922998	N/A
	2064.8XX	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	7105.10X/152/8X7			N/A	N/A	M923845	N/A	N/A
Studio S®	7105.80X/82X	Regular Male	002, 295	N/A	N/A	N/A	N/A	N/A
	7184.10X	Slim	Plain, no finish	N/A	M922917	N/A	N/A	N/A
Times Square®	7184.85X	Regular Male	002, 295	M922901	N/A	M922991	N/A	N/A
	7184.80X	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Town Square [®] S	7455	Regular Male	002, 013, 278, 295	M922901	N/A	M922991	N/A	N/A
Townsend®	7353	Slim	Plain, no finish	N/A	N/A	M923845	N/A	N/A

-0750A Stainless Steel -0130A Polished Nickel -2240A Oil Rubbed Bronze

-2780A Legacy Bronze -2950A Brushed Nickel N/A Not Available

All residential faucets shipped with 1.2 gpm (4.5 L/min) standard aerator. Additional modifications available.

American Standard

AS America, Inc. One Year Limited Warranty

If inspection of this AS America, Inc. ("American Standard[®]") plumbing product, within one year after its initial purchase, confirms that it is defective in materials or workmanship, American Standard will repair or, at its option, exchange the product for a similar model.

This limited warranty applies only to the original purchaser and installation of these products. In the event of a limited warranty claim, proof of purchase will be required – **save sales receipt**.

This limited warranty does not apply to local building code compliance. Since local building codes vary considerably, the purchaser of this product should check with a local building or plumbing contractor to ensure local code compliance before installation.

This limited warranty is void if the product has been moved from its initial place of installation; if it has been subjected to faulty maintenance, abuse, misuse, accident or other damages; if it was not installed in accordance with American Standard's instructions; or if it has been modified in a manner inconsistent with the product as shipped by American Standard.

American Standard's option to repair or exchange the product under this limited warranty does not cover any labor or other costs of removal or installation. IN NO EVENT WILL American Standard BE LIABLE FOR THE COST OF REPAIR OR REPLACEMENT OF ANY INSTALLATION MATERIALS. INCLUDING BUT NOT LIMITED TO, TILES, MARBLE, ETC. American Standard will not be responsible for any other incidental or consequential damages attributable to a product defect or to the repair or exchange of a defective product, all of which are expressly excluded from this limited warranty. This limited warranty does not cover any liability for consequential or incidental damages, all of which are hereby expressly disclaimed, or the extension beyond the duration of this limited warranty or any implied limited warranties, including those of merchantability or fitness for an intended purpose. (Some states or provinces do not allow the exclusion or limitation of implied limited warranties, so this exclusion may not apply to you.)

This limited warranty gives you specific legal rights. You may have other statutory rights that vary from state to state or from province to province, in which case this limited warranty does not affect such statutory rights. AS America, Inc. Limited Warranty for ActiClean[®], Boulevard[®] Dual Flush, Champion[®] PRO, Champion[®]4, Heritage[®] VorMax[®], VorMax, VorMax Plus and LXP[®] Toilets

This toilet comes with a limited lifetime warranty on chinaware, a limited 10-year warranty on all mechanical parts of the toilet, and a limited one-year warranty on the toilet seat if included with product. If inspection of this AS America, Inc. ("American Standard[®]") plumbing product, inclusive of the chinaware and all mechanical parts, confirms that it is defective in materials or workmanship, American Standard will repair or, at its option, exchange the product for the same or a similar model.

This limited warranty applies only to the original non-commercial purchaser and installation of the products. In the event of a limited warranty claim, proof of purchase will be required – **save sales receipt.**

For this warranty to become effective, the warranty registration process must be completed via the internet or telephone per the warranty registration instructions.

This limited warranty does not apply to commercial installations. The warranty for commercial installations is one year on chinaware and mechanical parts and one year on the toilet seat if included with product.

This warranty **does not apply** to local building code compliance. Since local building codes vary considerably, the purchaser of the product should check with a local building or plumbing contractor to ensure local code compliance before installation.

This warranty **will be void** if the product has been moved from its initial place of installation; if it has been subjected to faulty maintenance, abuse, misuse, accident or other damage; if it was not installed in accordance with American Standard's instructions; or if it has been modified in a manner inconsistent with the product as shipped by American Standard.

WARNING: This warranty DOES NOT COVER any damages caused by the use of in-tank cleaners. These products can seriously corrode the fittings in the tank. This damage can cause leakage and property damage. American Standard will not be responsible or liable for any damage caused by the use of in-tank cleaners.

American Standard's option to repair or exchange the product under this warranty does not cover any labor or other costs of removal or installation including any costs of any surrounding material such as tile or marble. **American Standard is not responsible for any other incidental or consequential damages attributed to a product defect or to the repair or exchange of a defective product, all of which are expressly excluded from this warranty.** (Some states or provinces do not allow the exclusion or limitation of implied warranties, so this exclusion may not apply to you.)

This warranty gives you specific rights. You may have other statutory rights that may vary from state to state or province to province, in which case this warranty does not affect such statutory rights.

AS America, Inc. Limited Warranty for Cadet[®] PRO, Cadet[®]3, Concealed Trapway Cadet[®]3, Edgemere[®],

CHINAWARE WARRANTIES ARE NOT TRANSFERABLE FROM ORIGINAL CONSUMER PURCHASER.

American Standard

Warranties

 $H_2Optimum^{\$}, H_2Option^{\$}, Loft^{\$}, Studio^{\$}$ Activate $^{\rm \tiny M}$ and Studio^{\\$} Dual Flush Toilets

This toilet comes with a limited lifetime warranty on chinaware, a limited five-year warranty on all mechanical parts of the toilet, a limited one-year warranty on electric parts if included with product and a limited one year warranty on the toilet seat if included with product. If inspection of this AS America, Inc. ("American Standard[®]") plumbing product, inclusive of the chinaware and all mechanical parts, confirms that it is defective in materials or workmanship, American Standard will repair or, at its option, exchange the product for the same or a similar model.

This limited warranty applies only to the original purchaser and installation of the products. In the event of a limited warranty claim, proof of purchase will be required – **save sales receipts.**

For this warranty to become effective, the warranty registration process must be completed via the internet or telephone per the warranty registration instructions.

This limited warranty does not apply to commercial installations. The warranty for commercial installations is one year on chinaware and mechanical parts and one year on the toilet seat if included with product.

This warranty **does not apply** to local building code compliance. Since local building codes vary considerably, the purchaser of the product should check with a local building or plumbing contractor to ensure local code compliance before installation.

This warranty **will be void** if the product has been moved from its initial place of installation; if it has been subjected to faulty maintenance, abuse, misuse, accident or other damage; if it was not installed in accordance with American Standard's instructions; or if it has been modified in a manner inconsistent with the product as shipped by American Standard.

WARNING: This warranty DOES NOT COVER any damages caused by the use of in-tank cleaners. These products can seriously corrode the fittings in the tank. This damage can cause leakage and property damage. American Standard will not be responsible or liable for any damage caused by the use of in-tank cleaners.

American Standard's option to repair or exchange the product under this warranty does not cover any labor or other costs of removal or installation including any costs of any surrounding material such as tile or marble. American Standard is not responsible for any other incidental or consequential damages attributed to a product defect or to the repair or exchange of a defective product, all of which are expressly excluded from this warranty. (Some states or provinces do not allow the exclusion or limitation of implied warranties, so this exclusion may not apply to you.)

This warranty gives you specific rights. You may have other statutory rights that may vary from state to state or province to province, in which case this warranty does not affect such statutory rights.

AS America, Inc. Limited Warranty for Colony[®] Toilets

This toilet comes with a limited lifetime warranty on chinaware, a limited two-year warranty on all mechanical parts of the toilet, and a limited one-year warranty on the toilet seat if included with product. If inspection of this AS America, Inc. ("American Standard®") plumbing product, inclusive of the chinaware and all mechanical parts, confirms that it is defective in materials or workmanship, American Standard will repair or, at its option, exchange the product for the same or a similar model.

This limited warranty applies only to the original purchaser and installation of the products. In the event of a limited warranty claim, proof of purchase will be required – **save sales receipts.**

For this warranty to become effective, the warranty registration process must be completed via the internet or telephone per the warranty registration instructions.

This limited warranty does not apply to commercial installations. The warranty for commercial installations is one year on chinaware and mechanical parts and one year on the toilet seat if included with product.

This warranty **does not apply** to local building code compliance. Since local building codes vary considerably, the purchaser of the product should check with a local building or plumbing contractor to ensure local code compliance before installation.

This warranty will be void if the product has been moved from its initial place of installation; if it has been subjected to faulty maintenance, abuse, misuse, accident or other damage; if it was not installed in accordance with American Standard's instructions; or if it has been modified in a manner inconsistent with the product as shipped by American Standard.

WARNING: This warranty DOES NOT COVER any damages caused by the use of in-tank cleaners. These products can seriously corrode the fittings in the tank. This damage can cause leakage and property damage. American Standard will not be responsible or liable for any damage caused by the use of in-tank cleaners.

American Standard's option to repair or exchange the product under this warranty does not cover any labor or other costs of removal or installation including any costs of any surrounding material such as tile or marble. American Standard is not responsible for any other incidental or consequential damages attributed to a product defect or to the repair or exchange of a defective product, all of which are expressly excluded from this warranty. (Some states or provinces do not allow the exclusion or limitation of implied warranties, so this exclusion may not apply to you.)

This warranty gives you specific rights. You may have other statutory rights that may vary from state to state or province to province, in which case this warranty does not affect such statutory rights.

American Standard

AS America, Inc. Three Year SpaLet[®] Limited Warranty

This SpaLet comes with a three-year warranty on all parts of the SpaLet. If inspection of this American Standard plumbing product, inclusive of the chinaware and all mechanical parts, confirms that it is defective in materials or workmanship, American Standard will repair or, at its option, exchange the product for the same or a similar model.

This limited warranty applies only to the original non-commercial purchaser and installation of the products.

This limited warranty does not apply to commercial installations. The warranty for commercial installations is two years on the SpaLet.

This warranty does not apply to local building code compliance. Since local building codes vary considerably, the purchaser of the product should check with a local building or plumbing contractor to ensure local code compliance before installation.

This warranty will be void if the product has been moved from its initial place of installation; if it has been subjected to faulty maintenance, abuse, misuse, accident or other damage; if it was not installed in accordance with American Standard's instructions; or if it has been modified in a manner inconsistent with the product as shipped by American Standard. The warranty will be void if the product has failed as a result of worn-out of consumable parts such as packing, fuses, batteries.

WARNING: This warranty DOES NOT COVER any damages caused by the use of harsh cleaners. These products can seriously corrode the product components. This damage can cause leakage and property damage. American Standard will not be responsible or liable for any damage caused by the use of in-tank cleaners.

American Standard's option to repair or exchange the product under this warranty does not cover any labor or other costs of removal or installation including any costs of any surrounding material such as tile or marble. American Standard is not responsible for any other incidental or consequential damages attributed to a product defect. (Some states or provinces do not allow the exclusion or limitation of implied warranties, so this exclusion may not apply to you.)

This warranty gives you specific rights. You may have other statutory rights that may vary from state to state or province to province, in which case this warranty does not affect such statutory rights.

AS America, Inc. Limited Lifetime Warranty for Luxury Series Acrylic Tubs

AS America, Inc. ("American Standard[®]") warrants to the original consumer purchaser that it will, at its option, repair or replace this tub or any of its parts that are found by American Standard, in its sole judgment, to be defective under normal residential use and maintenance so long as it is owned by the original consumer purchaser.

This limited warranty does not apply to commercial installations. The warranty for commercial installations is three (3) years.

THIS WARRANTY SHALL BE VOID IF THE ACCESS PANEL TO THE WHIRLPOOL IS COVERED IN ANY MANNER CONTRARY TO THE INSTALLATION INSTRUCTIONS. In no event will American Standard be liable for the cost of repair or replacement of any installation materials including but not limited to tiles, marble etc.

This limited warranty DOES NOT COVER the following:

- Defects or damages arising from shipping, installation, alterations, accidents, abuse, misuse, lack of proper maintenance and cleaning as directed in the owner's manual and use of other than genuine American Standard replacement parts, in all cases whether caused by a plumbing contractor, service company, the owner or any other person.
- 2. Deterioration through normal wear and tear and the expense of normal maintenance.
- 3. Commercial application.
- 4. Options and accessories. American Standard's limited warranty on these items is one year for parts only and excludes labor. This one year limited warranty covers accessories manufactured by American Standard (e.g. aprons, drains, grab bars, heaters, trim kits) against defects of material or workmanship. Warranty coverage begins on the date the accessory was originally purchased by the owner.
- Postage or shipping costs for returning products for repairs or replacement under this limited warranty and labor or other costs incurred in connection with product removal or installation under this limited warranty.
- 6. ANY LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, ALL OF WHICH ARE HEREBY EXPRESSLY DISCLAIMED, OR THE EXTENSION BEYOND THE DURATION OF THIS LIMITED WARRANTY OR ANY IMPLIED WARRANTIES, INCLUDING THOSE OF MERCHANTABILITY OR FITNESS FOR AN INTENDED PURPOSE. (Some jurisdictions do not allow limitations on how long an implied warranty lasts, or the exclusion or limitation of incidental or consequential damages, so these limitations and exclusions may not apply to you.)
- 7. Responsibility for compliance with local code requirements. (Since local code requirements vary greatly distributors, retailers, dealers, installation contractors and users of plumbing products should determine whether there are any code restrictions on the installation or use of a specific product.)

This limited warranty gives you specific legal rights. You may have other statutory rights that vary from state to state or province to province, in which case this limited warranty does not affect such statutory rights.

American Standard

AS America, Inc. Limited Warranty for Master Series Tubs and Acrylic Bases

AS America, Inc. ("American Standard[®]") warrants to the original consumer purchaser that it will, at its option, repair or replace any of its plumbing products found by it to be defective under normal use and maintenance within the following periods from date of purchase: electronic components – two (2) years; pump motors – three (3) years; fittings and plumbing – two (2) years; shell – ten (10) years residential; three (3) years commercial. In the event of a limited warranty claim proof of purchase will be required – **save sales receipt.**

This limited warranty DOES NOT COVER the following:

- Defects or damage arising from shipping, installation, alterations, accidents, abuse, misuse, lack of proper maintenance and use of other than genuine American Standard replacement parts, in all cases whether caused by a plumbing contractor, service company, the owner or any other person.
- 2. Deterioration through normal wear and tear.
- Expense of normal maintenance periodic replacement of washers, seals, etc. is a normal maintenance requirement.
- 4. IN NO EVENT WILL AMERICAN STANDARD BE LIABLE FOR THE COST OF REPAIR OR REPLACEMENT OF ANY INSTALLATION MATERIALS, INCLUDING BUT NOT LIMITED TO, TILES, MARBLE ETC.
- 5. Postage or shipping costs for returning products for repairs or replacement under this limited warranty and labor or other costs incurred in connection with product removal or installation under this limited warranty.
- 6. ANY LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, ALL OF WHICH ARE HEREBY EXPRESSLY DISCLAIMED, OR THE EXTENSION BEYOND THE DURATION OF THIS LIMITED WARRANTY OR ANY IMPLIED LIMITED WARRANTIES, INCLUDING THOSE OF MERCHANTABILITY OR FITNESS FOR AN INTENDED PURPOSE. (Some jurisdictions do not allow limitations on how long an implied limited warranty lasts, or the exclusion or limitation of incidental or consequential damages, so these limitations and exclusions may not apply to you.)
- Responsibility for compliance with local code requirement. (Since code requirements vary greatly, distributors, dealers, installation contractor and users of plumbing products should determine whether there are any code restrictions on the installation or use of a specific product.)
- 8. If a whirlpool unit is purchased by a dealer and used as a demonstration unit the limited warranty takes effect as soon as the dealer uses the product as a demo. If this demonstration unit is subsequently sold to a customer, the dealer may transfer the remaining period of the limited warranty to the buyer only with American Standard written approval.

This limited warranty gives you specific legal rights. You may have other statutory rights that vary from state to state or province to province, in which case this limited warranty does not affect such statutory rights.

AS America, Inc. Limited Ten Year Warranty for Personal Residential Use Americast® Tubs

AS America, Inc. ("American Standard") warrants this product against defects in materials and workmanship under normal residential use for TEN (10) years by the original consumer purchaser. The TEN (10) year warranty does not apply to this product's textured bottom surface. American Standard warrants the textured bottom surface against defects in materials and workmanship under normal residential use for a period of ONE (1) year from the date of first purchase.

This warranty is provided for the exclusive benefit of the initial consumer purchaser or owner. This warranty is non-transferable to subsequent purchasers or owners. The sole exception to the non-transferability of this warranty is that if this product is purchased by a plumber, contractor or other service provider, this warranty extends to the first residential property owner on whose behalf the product was purchased for installation. This warranty applies only to tubs installed in the United States of America, Canada or Mexico.

If a defect arises and a valid claim is received, American Standard will, at its option, either repair or replace the defective product free of charge. The decision whether to repair or replace is determined by American Standard in its sole discretion. Proof of purchase (original sales receipt) must be provided to American Standard with all warranty claims.

This warranty only applies to American Standard Americast[®] tubs. Unless otherwise specified, all other American Standard options and accessories are covered by the AS AMERICA, INC. ONE YEAR LIMITED WARRANTY, which warrants options and accessories against defects in material and workmanship for one (1) year from the date of first purchase.

EXCLUSIONS AND LIMITATIONS

- This warranty does not apply to commercial installations (defined as installations in apartments and other rental units, non-residential facilities, hotels, commercial businesses and/ or other public accommodations). The AS AMERICA, INC. LIMITED WARRANTY FOR COMMERCIAL USE AMERICAST[®] TUBS applies to commercial installations.
- This warranty only applies to products purchased after January 1, 2017.
- 3. This warranty only applies to products purchased through an authorized AS America, Inc. dealer or re-seller.
- 4. This warranty does not apply to defects or damage caused by non-genuine American Standard parts, installation error, product abuse, product misuse, improper maintenance, improper care or cleaning, improper repair or installation, and/or movement or transfer of the tub from its original installation location (whether performed by you, a plumber, a contractor or a service company). Because improper care and cleaning can cause significant damage to the tub, it is strongly recommended that you follow the Care and Cleaning Instructions (as well as the other instructions) that accompanied the tub.
- 5. American Standard is not responsible for labor charges and/or damage incurred during installation, repair or replacement.
- American Standard does not warrant that this product and/ or its installation complies with local code requirements. American Standard recommends that you consult with a plumbing contractor about local code requirements.

Continued on next page.

American Standard

List Price Guide 2020 555

TO THE EXTENT PERMITTED BY LAW, THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, WHETHER ORAL OR WRITTEN, STATUTORY, EXPRESS OR IMPLIED. AMERICAN STANDARD HEREBY EXCLUDES SPECIAL, INCIDENTAL AND CONSEQUENTIAL DAMAGES FOR ANY BREACH OF ANY EXPRESS OR IMPLIED WARRANTY APPLICABLE TO THIS PRODUCT.

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations and exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state (or province, as applicable).

Obtaining Warranty Service

If you believe that you have a warranty claim, contact American Standard, either through an authorized AS America, Inc. dealer or re-seller, or by writing:

In the United States AMERICAN STANDARD BRANDS

One Centennial Avenue, Piscataway, NJ 08855 Attn: Director of Consumer Affairs.

For residents of the United States, warranty information may also be obtained by calling the following toll free number: (800) 442-1902 www.americanstandard.com

In Canada

LIXIL Canada Inc. 5900 Avebury Rd. Mississauga, Ontario Canada L5R 3M3 Toll Free: (800) 387-0369 www.americanstandard.ca

In Mexico

American Standard B&K Mexico S. de R.L. de C.V. Via Morelos #330 Col. Santa Clara Ecatepec 55540 Edo. Mexico Toll Free: 01-800-839-1200 www.americanstandard.com

Please be sure to provide all pertinent information regarding your claim, including a complete description of the problem, the product, model number, color, finish, purchase date, and from whom the product was purchased.

For other information, or to obtain the name and address of the service and repair facility nearest you, call **(800) 442-1902** (in the United States); **(800) 387-0369** (in Canada) and **01-800-839-1200** (in Mexico).

AS America, Inc. Limited Warranty for Commercial Use Americast[®] Tubs

AS America, Inc. ("American Standard") warrants this product against defects in materials and workmanship under normal commercial use for a period of TEN (10) years from the date of first purchase. The TEN (10) year warranty period does not apply to this product's textured bottom surface. American Standard warrants the textured bottom surface against defects in materials and workmanship under normal commercial use for a period of ONE (1) year from the date of first purchase.

Commercial use is defined as installations in apartments and other rental units, non-residential facilities, hotels, commercial businesses and/or other public accommodations.

This warranty is provided for the exclusive benefit of the initial commercial purchaser or owner. This warranty is non-transferable to subsequent purchasers or owners. The sole exception to the non-transferability of this warranty is that if this product is purchased by a plumber, contractor or other service provider, this warranty extends to the first commercial owner on whose behalf the product was purchased for installation. This warranty applies only to tubs installed in the United States of America, Canada or Mexico.

If a defect arises and a valid claim is received, American Standard will, at its option, either repair or replace the defective product free of charge. The decision whether to repair or replace is determined by American Standard in its sole discretion. Proof of purchase (original sales receipt) must be provided to American Standard with all warranty claims.

This warranty only applies to American Standard Americast[®] tubs. Unless otherwise specified, all other American Standard options and accessories are covered by the AS AMERICA, INC. ONE YEAR LIMITED WARRANTY, which warrants options and accessories against defects in material and workmanship for one (1) year from the date of first purchase.

EXCLUSIONS AND LIMITATIONS

- This warranty does not apply to personal residential installations. The AS AMERICA, INC. TEN YEAR LIMITED WARRANTY FOR PERSONAL RESIDENTIAL USE AMERICAST® TUBS applies to personal residential installations.
- 2. This warranty only applies to products purchased after January 1, 2017.
- 3. This warranty only applies to products purchased through an authorized AS America, Inc. dealer or re-seller.
- 4. This warranty does not apply to defects or damage caused by non-genuine American Standard parts, installation error, product abuse, product misuse, improper maintenance, improper care or cleaning, improper repair or installation, and/or movement or transfer of the tub from its original installation location (whether performed by you, a plumber, a contractor or a service company). Because improper care and cleaning can cause significant damage to the tub, it is strongly recommended that you follow the Care and Cleaning Instructions (as well as the other instructions) that accompanied the tub.

Continued on next page.



Warranties

- 5. American Standard is not responsible for labor charges and/or damage incurred during installation, repair or replacement.
- American Standard does not warrant that this product and/or its installation complies with local code requirements. American Standard recommends that you consult with a plumbing contractor about local code requirements.

TO THE EXTENT PERMITTED BY LAW, THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, WHETHER ORAL OR WRITTEN, STATUTORY, EXPRESS OR IMPLIED. AMERICAN STANDARD HEREBY EXCLUDES SPECIAL, INCIDENTAL AND CONSEQUENTIAL DAMAGES FOR ANY BREACH OF ANY EXPRESS OR IMPLIED WARRANTY APPLICABLE TO THIS PRODUCT.

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations and exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state (or province, as applicable).

Obtaining Warranty Service

If you believe that you have a warranty claim, contact American Standard, either through an authorized AS America, Inc. dealer or re-seller, or by writing:

In the United States **AMERICAN STANDARD BRANDS** One Centennial Avenue, Piscataway, NJ 08855 Attn: Director of Consumer Affairs.

For residents of the United States, warranty information may also be obtained by calling the following toll free number: (800) 442-1902 www.americanstandard.com

In Canada

LIXIL Canada Inc.

5900 Avebury Rd. Mississauga, Ontario Canada L5R 3M3 Toll Free: (800) 387-0369 www.americanstandard.ca

In Mexico

American Standard B&K Mexico

S. de R.L. de C.V. Via Morelos #330 Col. Santa Clara Ecatepec 55540 Edo. Mexico Toll Free: **01-800-839-1200 www.americanstandard.com**

Please be sure to provide all pertinent information regarding your claim, including a complete description of the problem, the product, model number, color, finish, purchase date, and from whom the product was purchased.

For other information, or to obtain the name and address of the service and repair facility nearest you, call **(800) 442-1902** (in the United States); **(800) 387-0369** (in Canada) and **01-800-839-1200** (in Mexico).

Walk-In Bath Limited Warranty Coverage

American Standard Walk-In Baths are warranted in accordance with the following warranty:

This warranty is extended to the first purchaser and does not extend to products previously used as display models or products that have been modified or repaired by anyone else but American Standard unless approved by American Standard. American Standard premium acrylic walk-in baths come with a fifteen (15) year warranty on the bathtub, ten (10) year warranty on the tub components and a Lifetime Warranty on the door seal. American Standard walk-in baths constructed of hi-gloss gelcoat construction come with a ten (10) year warranty on the bathtub, five (5) year warranty on the tub components and a Lifetime Warranty on the door seal.

WARRANTY LIMITATIONS

In the event of a defect in the material or workmanship of a product, defective products will be repaired or replaced. The manufacturer shall not be liable for the expense of removing defective products or installing replacement products or the expense of adjoining components such as tile, marble, wall panels, ceilings etc. No liability shall exist for incidental or consequential damages caused in whole or part by any defect in this product. No warranty, expressed or implied, including any warranty of merchantability or fitness for a particular purpose, shall apply after the warranty period described above. This warranty does not cover defects or damage caused by the common carrier or installer from, without limitation, any of the following: careless handling, lifting bathtubs by the piping, modification of the product for any reason, improper installation (including installation not in accordance with instructions provided with the unit), and acts of God.

RETURN POLICY

American Standard is committed to providing premium customer service. In the event that a product must be returned due to reasons other than defects, as mentioned in the warranty, the following procedures apply: Requests for returns and/or exchanges must be made within 30 days of receipt of product. The product must be in its original packaging and received at American Standard in saleable condition. All returns will receive a 15% restocking fee plus all freight costs of the original shipment and return shipment to American Standard. All requests for return must first be approved by American Standard and have an assigned Returned Merchandise Authorization (RMA#).

American Standard

AS America, Inc. Limited Lifetime Warranty for Shower Doors

AS America, Inc. ("American Standard[®]") warrants to the original consumer purchaser that it will, at its sole option, repair or replace this product or any part of this product, if it confirms that the product is defective in materials or workmanship under normal use and maintenance for the lifetime of this product.

This warranty does not apply to commercial installations. Commercial installations shall have a limited warranty of 3 year(s).

This limited warranty DOES NOT COVER the following:

- Defects or damage arising from shipping, installation, alterations, accidents, abuse, misuse, lack of proper maintenance and use of other than genuine American Standard replacement parts, in all cases whether caused by a plumbing contractor, service company, the owner or any other person.
- 2. Deterioration through normal wear and tear.
- 3. WATER DAMAGE, OR DAMAGES RESULTING FROM ABUSE OR MISUSE OR FROM FAILURE TO INSTALL OR MAINTAIN THIS PLUMBING PRODUCT IN ACCORDANCE WITH THE WRITTEN INSTRUCTIONS FURNISHED BY AS AMERICA, INC.
- 4. USE OF CLEANING PRODUCTS CONTAINING CALCIUM HYPO CHLORITE (CHLORINE), SCOURING POWDERS OR PADS SHALL NOT BE COVERED.
- 5. THE USE OF SCENTED CANDLES IN CLOSE PROXIMITY WITH THIS PRODUCT CAN RESULT IN PERMANENT STAINING OF THE FINISH.
- 6. Expense of normal maintenance.
- All costs of removal, transportation, labor, reinstallation or other costs including postage and/or shipping costs to obtain warranty service shall be paid by the consumer.
- 8. ANY LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, ALL OF WHICH ARE HEREBY EXPRESSLY DISCLAIMED. ANY IMPLIED WARRANTIES, INCLUDING THOSE OF MERCHANTABILITY OR FITNESS FOR PURPOSE INTENDED ARE SPECIFICALLY EXCLUDED. (Some jurisdictions do not allow limitations on how long an implied warranty lasts, or the exclusion or limitation of incidental or consequential damages, so these limitations and exclusions may not apply to you.)
- 9. Responsibility for compliance with local code requirements ARE EXCLUDED FROM THIS WARRANTY. (Since local code requirements vary greatly distributors, dealers, installation contractors and users of plumbing products should determine whether there are any code restrictions on the installation or use of a specific product.)

This limited warranty gives you specific legal rights. You may have other statutory rights that vary from state to state or province to province, in which case this limited warranty does not affect such statutory rights.

AS America, Inc. Bath Furniture Limited Warranty

If inspection of this AS America, Inc. ("American Standard[®]") plumbing product, within one year after its initial purchase, confirms that it is defective in materials or workmanship, American Standard will repair or, at its option, exchange the product for a similar model. Variations in actual wood color and finishes which may result from natural characteristics of the wood, such as grain patterns, mineral streaks and the like, are not defects and are not covered by this limited warranty.

This limited warranty applies only to the original purchaser and installation of these products. In the event of a claim, proof of purchase will be required – **save sales receipts.**

This limited warranty does not apply to local building code compliance. Since local building codes vary considerably, the purchaser of this product should check with a local building or plumbing contractor to ensure local code compliance before installation.

This limited warranty is void if the product has been moved from its initial place of installation; if it has been subjected to faulty maintenance, abuse, misuse, accident or other damages; if it was not installed in accordance with American Standard's instructions; or if it has been modified in a manner inconsistent with the product as shipped by American Standard.

American Standard's option to repair or exchange the product under this limited warranty does not cover any labor or other costs of removal or installation, nor shall American Standard be responsible for any other incidental or consequential damages attributable to a product defect or to the repair or exchange of a defective product, all of which are expressly excluded from this limited warranty. This limited warranty does not cover any liability for consequential or incidental damages, all of which are hereby expressly disclaimed, or the extension beyond the duration of this limited warranty or any implied limited warranties, including those of merchantability or fitness for an intended purpose. (Some states or provinces do not allow the exclusion or limitation of implied limited warranties, so this exclusion may not apply to you).

This limited warranty gives you specific legal rights. You may have other statutory rights that vary from state to state or province to province, in which case this limited warranty does not affect such statutory rights.

American Standard

AS America, Limited Warranty for Fine Fireclay Kitchen Sinks

If inspection of this American Standard Fine Fire Clay product, within five years after its initial purchase, confirms that it is defective in materials or workmanship, American Standard Brands ("American Standard") will repair or, at its option, exchange the product for a similar model.

This limited warranty applies only to the original purchaser and installation of these products. This warranty is non-transferable to subsequent purchasers or owners. The sole exception to the non-transferability of this warranty is that if this product is purchased by a plumber, contractor or other service provider, this warranty extends to the first owner on whose behalf the product was purchased for installation. This warranty applies only to sinks installed in the United States of America, Canada or Mexico. In the event of a limited warranty claim, proof of purchase will be required—save sales receipt and other product identifying information.

This limited warranty does not apply to local building code compliance. Since local building codes vary considerably, the purchaser of this product should check with a local building or plumbing contractor to ensure local code compliance before installation. This warranty shall be void if the product has been moved from its initial place of installation; if it has been subjected to faulty maintenance, abuse, misuse, accident or other damages; if it was not installed in accordance with American Standard's instructions; or if it has been modified in a manner inconsistent with the product as shipped by American Standard.

American Standard's option to repair or exchange the product under this limited warranty does not cover any labor or other costs of removal or installation.

TO THE EXTENT PERMITTED BY LAW, THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, WHETHER ORAL OR WRITTEN, STATUTORY, EXPRESS OR IMPLIED. AMERICAN STANDARD HEREBY EXCLUDES SPECIAL, INCIDENTAL AND CONSEQUENTIAL DAMAGES FOR ANY BREACH OF ANY EXPRESS OR IMPLIED WARRANTY APPLICABLE TO THIS PRODUCT.

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations and exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state (or province, as applicable).

Obtaining Warranty Service

If you believe that you have a warranty claim, contact American Standard, either through an authorized AS America, Inc. dealer or re-seller, or by writing:

In the United States **AMERICAN STANDARD BRANDS** One Centennial Avenue, Piscataway, NJ 08855 Attn: Director of Consumer Affairs.

For residents of the United States, warranty information may also be obtained by calling the following toll free number: (800) 442-1902 www.americanstandard.com

In Canada

LIXIL Canada Inc. 5900 Avebury Rd. Mississauga, Ontario Canada L5R 3M3 Toll Free: (800) 387-0369 www.americanstandard.ca

In Mexico

American Standard B&K Mexico S. de R.L. de C.V. Via Morelos #330 Col. Santa Clara Ecatepec 55540 Edo. Mexico Toll Free: 01-800-839-1200 www.americanstandard.com

American Standard

AS America, Inc. Limited Lifetime Warranty for Stainless Steel Kitchen Sinks

If an AS America, Inc. ("American Standard") stainless steel kitchen sink is found to be defective in materials or workmanship, after inspection by an authorized American Standard representative, American Standard will repair or, at its option, exchange the product for a similar model. This limited warranty is applicable under normal personal residential use, so long as it remains in use in its original place of installation.

This limited warranty applies only to the original purchaser and installation of these products. This warranty is non-transferable to subsequent purchasers or owners. The sole exception to the non-transferability of this warranty is that if this product is purchased by a plumber, contractor or other service provider, this warranty extends to the first owner on whose behalf the product was purchased for installation. This warranty applies only to sinks installed in the United States of America, Canada or Mexico. In the event of a limited warranty claim, proof of purchase will be required—save sales receipt and other product identifying information.

The limited lifetime warranty does not apply to commercial installations. Commercial use is defined as installations in apartments and other rental units, non-residential facilities, hotels, commercial businesses and/or other public accommodations. The warranty for commercial installations is three (3) years under normal use, and is otherwise subject to all the same exclusions and limitations identified herein.

This limited warranty does not apply to local building code compliance. Since local building codes vary considerably, the purchaser of this product should check with a local building or plumbing contractor to assure local code compliance before installation.

This limited warranty is void if the stainless steel kitchen sink has been moved from its initial place of installation; if it has been subjected to faulty maintenance, abuse, misuse, accident or other damage; if it was not installed in accordance with American Standard's instructions; or if it was modified in a manner inconsistent with the product as shipped by American Standard.

American Standard's option to repair or exchange the product under this limited warranty does not cover any labor or other costs of removal or installation.

TO THE EXTENT PERMITTED BY LAW, THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, WHETHER ORAL OR WRITTEN, STATUTORY, EXPRESS OR IMPLIED. AMERICAN STANDARD HEREBY EXCLUDES SPECIAL, INCIDENTAL AND CONSEQUENTIAL DAMAGES FOR ANY BREACH OF ANY EXPRESS OR IMPLIED WARRANTY APPLICABLE TO THIS PRODUCT.

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations and exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state (or province, as applicable).

Obtaining Warranty Service

If you believe that you have a warranty claim, contact American Standard, either through an authorized AS America, Inc. dealer or re-seller, or by writing:

In the United States AMERICAN STANDARD BRANDS

One Centennial Avenue, Piscataway, NJ 08855 Attn: Director of Consumer Affairs.

For residents of the United States, warranty information may also be obtained by calling the following toll free number: (800) 442-1902 www.americanstandard.com

In Canada

LIXIL Canada Inc.

5900 Avebury Rd. Mississauga, Ontario Canada L5R 3M3 Toll Free: (800) 387-0369 www.americanstandard.ca

In Mexico

American Standard B&K Mexico

S. de R.L. de C.V. Via Morelos #330 Col. Santa Clara Ecatepec 55540 Edo. Mexico Toll Free: **01-800-839-1200 www.americanstandard.com**

Please be sure to provide all pertinent information regarding your claim, including a complete description of the problem, the product, model number, color, finish, purchase date, and from whom the product was purchased.



AS America, Inc. Limited Lifetime Warranty for Cast Iron Kitchen Sinks

If an AS America, Inc. ("American Standard") cast iron kitchen sink is found to be defective in materials or workmanship, after inspection by an authorized American Standard representative, American Standard will repair or, at its option, exchange the product for a similar model. This limited warranty is applicable under normal personal residential use, so long as it remains in use in its original place of installation.

This limited warranty applies only to the original purchaser and installation of these products. This warranty is non-transferable to subsequent purchasers or owners. The sole exception to the non-transferability of this warranty is that if this product is purchased by a plumber, contractor or other service provider, this warranty extends to the first owner on whose behalf the product was purchased for installation. This warranty applies only to sinks installed in the United States of America, Canada or Mexico. In the event of a limited warranty claim, proof of purchase will be required—save sales receipt and other product identifying information.

The limited lifetime warranty does not apply to commercial installations. Commercial use is defined as installations in apartments and other rental units, non-residential facilities, hotels, commercial businesses and/or other public accommodations. The warranty for commercial installations is three (3) years under normal use, and is otherwise subject to all the same exclusions and limitations identified herein.

This limited warranty does not apply to local building code compliance. Since local building codes vary considerably, the purchaser of this product should check with a local building or plumbing contractor to assure local code compliance before installation.

This limited warranty is void if the cast iron kitchen sink has been moved from its initial place of installation; if it has been subjected to faulty maintenance, abuse, misuse, accident or other damage; if it was not installed in accordance with American Standard's instructions; or if it was modified in a manner inconsistent with the product as shipped by American Standard.

American Standard's option to repair or exchange the product under this limited warranty does not cover any labor or other costs of removal or installation.

TO THE EXTENT PERMITTED BY LAW, THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, WHETHER ORAL OR WRITTEN, STATUTORY, EXPRESS OR IMPLIED. AMERICAN STANDARD HEREBY EXCLUDES SPECIAL, INCIDENTAL AND CONSEQUENTIAL DAMAGES FOR ANY BREACH OF ANY EXPRESS OR IMPLIED WARRANTY APPLICABLE TO THIS PRODUCT.

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations and exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state (or province, as applicable).

Obtaining Warranty Service

If you believe that you have a warranty claim, contact American Standard, either through an authorized AS America, Inc. dealer or re-seller, or by writing:

In the United States **AMERICAN STANDARD BRANDS** One Centennial Avenue, Piscataway, NJ 08855

Attn: Director of Consumer Affairs.

For residents of the United States, warranty information may also be obtained by calling the following toll free number: (800) 442-1902 www.americanstandard.com

In Canada

LIXIL Canada Inc. 5900 Avebury Rd. Mississauga, Ontario Canada L5R 3M3 Toll Free: (800) 387-0369 www.americanstandard.ca

In Mexico

American Standard B&K Mexico

S. de R.L. de C.V. Via Morelos #330 Col. Santa Clara Ecatepec 55540 Edo. Mexico Toll Free: **01-800-839-1200 www.americanstandard.com**

Please be sure to provide all pertinent information regarding your claim, including a complete description of the problem, the product, model number, color, finish, purchase date, and from whom the product was purchased

American Standard

AS America, Inc. Faucet Limited Lifetime Function and Finish Warranty

FOR RESIDENTIAL INSTALLATIONS: AS America, Inc. ("American Standard[®]") warrants this product to be free from defects in materials or workmanship for as long as the original consumer purchaser owns this product. Proof of purchase (original sales receipt) from the original consumer purchaser must be made available to American Standard for all warranty claims. This warranty is non-transferable. It does not apply in the event of product damage due to the use of other than genuine American Standard replacement parts, installation error, abuse, misuse or improper care and maintenance (whether performed by a plumber, contractor, service provider or member of the purchaser's household). The warranty excludes damage due to aggressive air or water conditions, or harsh or abrasive cleaners and/or materials.

FOR COMMERCIAL INSTALLATIONS: For all industrial, commercial and business usage the warranty period is five years, from date of purchase and except for duration, all other aforementioned warranty terms apply. For both Residential and Commercial warranties, batteries are not included in the warranty.

FOR ELECTRONIC FAUCETS, VALVES AND CONTROLS: American Standard warrants its electronic faucets, valves and controls to be free from manufacturing defects in material and workmanship under normal use for five (5) years from the date of purchase by or for the original consumer owner.

American Standard will provide free of charge, at it's sole option, replacement part(s) or product (or if no longer available, a comparable product) to replace those which have proven defective in materials or workmanship.

This warranty does not cover labor charges incurred and/or damage sustained in installation, repair or replacement, nor incidental or consequential damages. This warranty is effective for all faucets sold after March 1, 2018.

THIS WARRANTY IS EXCLUSIVELY IN LIEU OF ALL OTHER WARRANTIES, INCLUDING ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

This warranty gives the original consumer purchaser of an American Standard faucet specific legal rights which may vary from state to state or from province to province. In some states or provinces the exclusion or limitation of incidental or consequential damages is not allowed, so those exclusions may not apply to you.

AS America, Inc. Five Year Limited Shower Warranty

FOR RESIDENTIAL INSTALLATIONS: AS America, Inc. ("American Standard®") warrants this product to be free from defects in materials or workmanship for the original consumer purchaser for a period of five years. Proof of purchase (original sales receipt) from the original consumer purchaser must be made available to American Standard for all warranty claims. This warranty is non-transferable. It does not apply in the event of product damage due to the use of other than genuine American Standard replacement parts, installation error, abuse, misuse or improper care and maintenance (whether performed by a plumber, contractor, service provider or member of the purchaser's household). The warranty excludes damage due to aggressive air or water conditions, or harsh or abrasive cleaners and/or materials.

FOR COMMERCIAL INSTALLATIONS: For all industrial, commercial and business usage the warranty period is five years, from date of purchase and except for duration, all other aforementioned warranty terms apply. For both Residential and Commercial warranties, standard batteries are not included in the warranty.

FOR ELECTRONIC SHOWERHEADS, HAND SHOWERS, SYSTEMS, VALVES AND CONTROLS: American Standard warrants its electronic showerheads, hand showers, systems, valves and controls to be free from manufacturing defects in material and workmanship under normal use for five (5) years from the date of purchase by or for the original consumer owner.

American Standard will provide free of charge, at its sole option, replacement part(s) or product (or if no longer available, a comparable product) to replace those which have proven defective in materials or workmanship.

This warranty does not cover labor charges incurred and/or damage sustained in installation, repair or replacement, nor incidental or consequential damages. This warranty is effective for all showers sold after November, 2017.

THIS WARRANTY IS EXCLUSIVELY IN LIEU OF ALL OTHER WARRANTIES, INCLUDING ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

This warranty gives the original consumer purchaser of an American Standard showerhead specific legal rights which may vary from state to state or from province to province. In some states or provinces the exclusion or limitation of incidental or consequential damages is not allowed, so those exclusions may not apply to you.

American Standard

Warranties

AS America, Inc. Limited Warranty for Parts and Accessories

AS America, Inc. ("American Standard") warrants plumbing parts and accessories (other than those products covered by a specific American Standard limited warranty, including warranties for specific toilets, tubs, shower doors, and sinks) against defects in materials and workmanship under normal use for ONE (1) year from the date of first purchase. This warranty is provided for the exclusive benefit of the initial purchaser or owner. This warranty is non-transferable to subsequent purchasers or owners. The sole exception to the non-transferability of this warranty is that if this product is purchased by a plumber, contractor or other service provider, this warranty extends to the first owner on whose behalf the product was purchased for installation. This warranty applies only to parts and accessories installed in the United States of America, Canada or Mexico.

If a defect arises and a valid claim is received, American Standard will, at its option, either repair or replace the defective product free of charge. The decision whether to repair or replace is determined by American Standard in its sole discretion. Proof of purchase (original sales receipt) must be provided to American Standard with all warranty claims.

EXCLUSIONS AND LIMITATIONS

- 1. This warranty only applies to products manufactured after January 1, 2017.
- 2. This warranty only applies to products purchased through an authorized AS America, Inc. dealer or re-seller.
- 3. This warranty does not apply to defects or damage caused by non-genuine American Standard parts, installation error, product abuse, product misuse, improper maintenance, improper care or cleaning, and/or improper repair or installation (whether performed by you, a plumber, a contractor or a service company).
- 4. American Standard is not responsible for labor charges and/or damage incurred during installation, repair or replacement.
- American Standard does not warrant that this product and/or its installation complies with local code requirements. American Standard recommends that you consult with a plumbing contractor about local code requirements.

TO THE EXTENT PERMITTED BY LAW, THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, WHETHER ORAL OR WRITTEN, STATUTORY, EXPRESS OR IMPLIED. AMERICAN STANDARD HEREBY EXCLUDES SPECIAL, INCIDENTAL AND CONSEQUENTIAL DAMAGES FOR ANY BREACH OF ANY EXPRESS OR IMPLIED WARRANTY APPLICABLE TO THIS PRODUCT.

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations and exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state (or province, as applicable). For service under these warranties, it is suggested that a claim be made through the contractor or dealer from or through whom the product was purchased, or that a service request (including a description of the product model and of the defect) be sent to the following address:

In the United States:

American Standard Brands[™] One Centennial Avenue Piscataway, New Jersey 08854 Attention: Director of Consumer Affairs

For residents of the United States, warranty information may also be obtained by calling the following toll free number: **(800) 442-1902**

www.americanstandard.com

In Canada:

LIXIL Canada, Inc. 5900 Avebury Road Mississauga, Ontario Canada L5R 3M3

Toll Free: (800) 387-0369

www.americanstandard.ca

In Mexico:

American Standard® B&K Mexico S. de R.L. de C.V. Via Morelos #330 Col. Santa Clara Ecatepec 55540 Edo. Mexico

Toll Free: 01-800-839-1200

www.americanstandard.com.mx

American Standard

Product SKU	Page	List Price	Product SKU	Page	List Price	Product SKU	Page	List Price
0010.000.020	170	134	0328.100.222	169	559	0491.019.021	189	133
0010.000.020	173	134	0328.400.020	169	447	0491.019.222	189	133
0028.000.020	177	75	0328.400.222	169	559	0495.221.020	193	102
0039.000.020	176	97	0328.800.020	169	447	0495.221.021	193	126
0039.001.020	169	132	0328.800.222	169	559	0495.221.222	193	126
0039.001.222	169	164	0329.001.020	181	259	0495.300.020	193	150
0041.000.020	174	101	0329.001.222	181	323	0496.221.020	193	102
0044.000.020	194	170	0329.004.020	181	259	0496.221.021	193	126
0056001.020	168	179	0329.004.222	181	323	0496.221.222	193	126
0056001.222	168	223	0329.008.020	181	259	0496.300.020	193	150
0059.020EC.020	195	206	0329.008.222	181	323	0497.221.020	193	160
0062.000EC.020	195	251	0330.000.020	190	227	0497.221.021	193	200
0066.000.020	171	195	0330.000.222	190	285	0497.221.222	193	200
023529-0070A	548	24	0342.001.020	184	271	0497.300.020	193	211
0236.001.020	175	189	0342.008.020	184	271	0514.000.020★	183	328
0236.004.020	175	189	0403.004.020	173	195	0545.000.020	192	164
0236.008.020	175	189	0403.004.020	182	195	0552.000.020	183	260
0236.111.020	175	259	0403.004.020	187	195	0552.001.020	183	270
0236.411.020	175	259	0403.004.222★	187	231	0555.001.020	160	224
0236.811.020	175	259	0403.008.020	173	195	0555.001.020	172	224
0255.112.020	132	426	0403.008.020	182	195	0555.001.222	160	282
0255.212.020	132	426	0403.008.020	187	195	0555.001.222	172	282
0263.112.020	132	454	0403.008.222★	187	231	0555.101.020	172	379
0263.112.222	132	500	0403.400.020	173	329	0555.101.222	172	478
0263.212.020	132	454	0403.800.020	173	329	0555.104.020	160	224
0263.212.222	132	500	0426.000.020	191	212	0555.104.020	172	224
0268.001.020	174	218	0426.000.021	191	266	0555.104.222	160	282
0268.001.020	194	218	0426.000.222	191	266	0555.104.222	172	282
0268.004.020	174	218	0445.001.020	163	179	0555.108.020	160	224
0268.004.020	194	218	0445.001.020	176	179	0555.108.020	172	224
0268.008.020	174	218	0445.004.020	163	179	0555.108.222	160	282
0268.008.020	194	218	0445.004.020	176	179	0555.108.222	172	282
0268.100.020	174	319	0445.008.020	163	179	0555.401.020	172	379
0268.144.020	194	388	0445.008.020	176	179	0555.401.222	172	478
0268.400.020	174	319	0445.100.020	176	276	0555.801.020	172	379
0268.444.020	194	388	0445.400.020	176	276	0555.801.222	172	478
0268.800.020	174	319	0445.800.020	176	276	0571.000.020*	187	215
0268.888.020	194	388	0447.001.020	179	109	0610.000.020	190	301
0282.004.020	164	340	0467.004.020	179	109	0610.000.222	190	380
0282.004.020	171	340	0467.008.020	179	109	0611.001.020	190	299
0282.004.020	164	424	0467.100.020	179	188	0611.004.020	177	299
0282.004.222	164	340	0467.400.020	179	188	0611.100.020	177	374
	164							374
0282.008.020		340	0467.800.020	179	188	0611.400.020	177	242
0282.008.222	164	424	0468.001.020	178	137	0614.000.020	191	308
0282.400.020	171	535	0468.004.020	178	137	0614.000.021	191	
0282.800.020	171	535	0468.008.020	178	137	0614.000.222	191	308
0297001.020	157 168	321	0468.100.020	178 178	216 216	0614.300.020	191 191	298 272
0297001.020		321	0468.400.020			0618.000.020		
0297001.222	157	402	0468.800.020	178	216	0618.000.021	191	344
0297001.222	168	402	047194-0070A	190	17	0618.000.222	191	344
0297004.020	157	315	047194-0070A	191	17	0621.001.020	165	346
0297004.020	168	315	047194-0070A	192	17	0621.001.020	183	346
0297008.020	157	321	047194-0070A	193	17	0630.000.020	192	203
0297008.020	168	321	0475.020.020	188	105	0641.001.020	170	217
0297008.222	157	402	0475.020.021	188	132	0641.001.020	186	217
0297008.222	168	402	0475.020.222	188	132	0641.001.020	186	217
0297100.020	168	500	0475.035.020	188	145	0641.001.222*	186	262
0297100.222	168	625	0475.047.020	188	105	0641.004.020	170	217
0297400.020	168	494	0475.047.021	188	132	0641.004.020	182	217
0297800.020	168	500	0475.047.222	188	132	0641.004.020	186	217
0297800.222	168	625	0475.920.020	188	145	0641.004.222★	186	262
0298001.020	158	346	0476.028.020	188	106	0641.008.020	170	217
0298001.020	181	346	0476.028.021	188	133	0641.008.020	182	217
0298001.222	158	432	0476.028.222	188	133	0641.008.020	186	217
0298001.222	181	432	0476.037.020	188	145	0641.008.222★	186	262
0298008.020	158	346	0476.928.020	188	145	0641.008.222★	186	262
0298008.020	181	346	0478.001.020★	187	165	0641.100.020	170	351
0298008.222	158	432	0478.403.020★	187	165	0641.400.020	170	351
0298008.222	181	432	0478.803.020★	187	162	0641.800.020	170	351
0328.001.020	169	315	0490.011.020★	189	106	0642.001.020	186	219
0328.001.222	169	395	0490.011.021★	189	133	0642.008.020	186	219
0328.004.020	169	315	0490.011.222★	189	133	0643.001.020	186	285
0328.004.222	169	395	0490.156.020★	189	106	0643.008.020	186	285
0328.008.020	169	315	0490.156.021★	189	133	066074-0020A	546	16
0020.000.020								
0328.008.222	169	395	0490.156.222*	189	133	066078-0070A	549	74

American Standard

Fixtures and Faucets

Index

Product SKU	Page	List Price	Product SKU	Page	List Price	Product SKU	Page	List Price
0670.000.020★	182	347	1660140.013★	531	235	1660513.002★	531	97
0670.312.020★	182	359	1660140.278★	531	253	1660513.075	531	135
0954.004EC.020	195	218	1660140.295	531	235	1660513.295*	531	135
0954.121EC.020 0954.123EC.020	195 195	242 242	1660142.002★ 1660142.013★	534 534	98 137	1660515.002★ 1660515.013★	526 526	83 116
0954.904EC.020	195	242	1660142.278★	534	149	1660515.278★	526	125
0955.001EC.020	195	218	1660142.295★	534	137	1660515.295★	526	116
0955.121EC.020	195	242	1660147.002★	534	56	1660516.002	526	83
0955.123EC.020	195	242	1660147.243★	534	85	1660516.013★	526	116
0955.901EC.020 0958.008EC.020	195 195	242 218	1660147.295★ 1660151.002	534 312	79 34	1660516.278★ 1660516.295★	526 526	125 116
0958.908EC.020	195	242	1660151.002	304	34	1660527.002	530	97
1180DB3620.291	11	1,550	1660151.075	312	41	1660527.243	530	146
1180SB3020SS.075	25	1,128	1660151.075	304	41	1660527.295	530	135
1180SB3020.291	10	1,250	1660152.002	309	34	1660528.002	530	97
1180SB3320.291	9	1,346	1660152.002	308	34	1660528.243	530	146
1180SB3620SS.075 1180SB3620.291	24 8	1,334	1660152.013 1660152.075	309 309	41 41	1660528.295	530 533	135 120
1203001.020	185	1,448 279	1660152.075	309	41	1660550.002★ 1660550.295★	533	179
1203004.020	185	279	1660152.243	308	41	1660604.002	526	84
1203008.020	185	279	1660152.278	309	44	1660604.278★	526	124
1466.006L	215	15	1660186.002	532	40	1660604.295★	526	116
1582.000.002	81	113	1660186.013	532	55	1660605.002★	526	84
1582.000.002	92	113	1660186.278	532	84	1660605.278★ 1660605.205★	526	124
1582.000.013 1582.000.013	81 92	159 159	1660186.295 1660190.002	532 532	55 62	1660605.295★ 1660608.002	526 534	116 116
1582.000.243	81	202	1660190.013★	532	92	1660608.013★	534	161
1582.000.243	92	202	1660190.278★	532	113	1660608.278★	534	220
1582.000.278	81	159	1660190.295	532	92	1660608.295	534	161
1582.000.278	92	159	1660194.002	532	89	1660609.002★	534	120
1582.000.295	81	170	1660194.013★	532	134	1660609.243★	534	179
1582.000.295 1583.470.002	92 92	170 157	1660194.278★ 1660194.295	532 532	165 134	1660609.295★ 1660610.002	534 530	167 212
1583.470.011	92	267	1660198.002	532	91	1660610.295	530	300
1583.470.020	92	267	1660198.295	532	136	1660613.002★	528	83
1583.470.295	92	267	1660206.002	527	50	1660613.295★	528	124
1594.170.002	114	157	1660206.295	527	67	1660620.002	527	74
1594.170.002	113	157	1660207.002	534	78	1660625.295★	527	135
1594.170.295 1594.170.295	114 113	262 262	1660207.295 1660225.002	534 540	103 128	1660627.002★ 1660627.295★	533 533	102 144
1599.205.002	92	154	1660225.295	540	120	1660641.002★	535	77
1599.205.011	92	185	1660230.002	540	258	1660650.002	528	100
1599.205.020	92	154	1660230.013★	540	362	1660650.295★	528	151
1599.205.222	92	185	1660230.278★	540	408	1660652.002	528	100
1599.205.295	92	248	1660230.295★	540	362	1660652.295★	528	151
1610.001 1610.001	216 217	6	1660236.002 1660236.295★	540 540	138 209	1660660.002★ 1660660.295★	531 531	117 173
1614.305.002	80	146	1660240.002	532	209	1660680.002	530	173
1614.305.002	92	146	1660240.013	532	33	1660680.295★	530	234
1614.305.013	80	205	1660240.278	532	39	1660681.002	530	149
1614.305.013	92	205	1660240.295	532	33	1660681.295★	530	208
1614.305.278	80	220	1660241.002	532	26	1660683.002	530	262
1614.305.278	92	220	1660241.013	532	33	1660683.295	530	393
1614.305.295 1614.305.295	80 92	205 205	1660241.278★ 1660241.295	532 532	39 36	1660688.002 1660688.013★	531 531	206 288
1640.305.002	92	138	1660245.002	532	26	1660688.278★	531	331
1640.305.011	92	185	1660245.013★	532	36	1660.688.295	531	288
1640.305.020	92	154	1660245.278★	532	39	1660710.002	529	28
1640.305.222	92	185	1660245.295	532	36	1660711.002	529	33
1640.305.295 1660103.002	92 532	248 28	1660330.002	540 541	162 45	1660715.002	529	52 77
1660103.013	532	40	1660400.002 1660400.013	541	43 62	1660717.002★ 1660717.295★	528 528	114
1660103.278	532	46	1660400.278	541	72	1660718.002★	528	83
1660103.295	532	40	1660400.295	541	62	1660730.002	539	87
1660113.002★	529	74	1660403.007	312	16	1660730.013	539	109
1660113.224★	529	111	1660.505.002	534	33	1660730.278	539	120
1660113.295★	529	111	1660506.002	534	120	1660730.295	539	109
1660118.002 1660118.013	532 532	113 157	1660508.002 1660508.013	526 526	94 133	1660738.002★ 1660738.013★	527 527	87 122
1660118.278 ★	532	193	1660508.278★	526	133	1660738.278★	527	122
1660118.295	532	157	1660508.295	526	133	1660738.295★	527	122
1660130.002	531	157	1660509.002	526	94	1660739.002★	527	87
1660130.013 ★	531	235	1660509.013★	526	133	1660739.013★	527	122
1660130.278*	531	253	1660509.278★ 1660500.205±	526	144	1660739.278★	527	131
1660130.295 1660140.002	531 531	235 157	1660509.295★ 1660510.002	526 533	133 127	1660739.295★ 1660741.002	527	122
1000140.002				000	,	1000741.002	535	70

American Standard

Product SKU	Page	List Price	Product SKU	Page	List Price	Product SKU	Page	List Price
1660766.002	533	62	18SB.6301800S.075	42	489	211AA.004.021	229	628
1660766.295	533	87	18SB.6332211.075	36	546	211AA.004.222	229	628
1660767.002	533	62	18SB.7001600S.075	48	315	211AA.005.020	229	509
1660767.295	533	87	18SB.8171700.075	30	525	211AA.104.020	227	504
1660771.002 1660771.013	539 539	131 175	18SB.9181600S.075 18SB.9231800S.075	46 43	400 420	211AA.104.021 211AA.104.222	227 227	628 628
1660771.278	539	208	18SB.9231800S.075	43	420	211AA.104.222 211AA.105.020	227	509
1660771.295	539	175	18SB.9252211.075	37	525	211BA.004.020	230	461
1660772.002	539	131	18SB.9301800S.075	41	525	211BA.004.021	230	573
1660772.013	539	175	18SB.9301800T.075	52	315	211BA.004.222	230	573
1660772.278	539	208	18SB.9302200A.075	27	747	211BA.005.020	230	466
1660772.295	539	175	18SB.9332200A.075	26	773	211BA.104.020	228	461
1660773.002	539	154	18SB.9332211.075	35	556	211BA.104.021	228	573
1660773.013	539	215	20DB.8332283C.075	57	383	211BA.104.222	228	573
1660773.278	539	231	20DB.8332283S.075	62	273	211BA.105.020	228	466
1660773.295	539	215	20DB.8332284S.075	62	273	211CA.004.020	232	429
1660774.002	536	219	20SB.8252283C.075	55	347	211CA.005.020	232	434
1660774.013	536	296	20SB.8252283S.075	59	258	211CA.104.020	231	429
1660774.278	536	308	20SB.8252284S.075	59	258	211CA.105.020	231	434
1660774.295	536	296	2000102P.002	353	44	212AA.104.020	225	574
1660775.002	536	219	2000102P.002	371	44	212AA.104.222	225	716
1660775.013	536	296	2000102P.002	390	44	212BA.104.020	225	531
1660775.278	536	308	2000102P.002	422	44	212BA.104.222	225	661
1660775.295	536	296	2000102P.013	371	62	212CA.104.020	226	499
1660788.002	531 531	206 288	2000102P.278	353 371	67 67	213AA.104.020	223 223	574 716
1660788.013 1660788.278	531	331	2000102P.278 2000102P.278	371	67	213AA.104.222 213BA.104.020	223	531
1660788.295	531	288	2000102P.278 2000102P.295	390	62	213BA.104.020 213BA.104.222	223	661
1660811.002	529	54	2000102P.295	371	62	213CA.104.020	224	499
1660813.002★	528	77	2000102P.295	390	62	215AA.004.020	247	387
1660813.224★	528	117	2000102P.295	422	62	215AA.004.021	247	482
1660813.295★	528	117	2004.314.020	211	686	215AA.004.222	247	482
1660841.002★	535	75	2034.314.020	210	745	215AA.005.020	247	392
1662184.002★	535	350	2034.314.021	210	931	215AA.104.020	245	387
1662184.295	536	489	2034.314.222	210	931	215AA.104.021	245	482
1662551.002	537	325	204AA.104.020	263	275	215AA.104.222	245	482
1662551.295	537	487	204AA.105.020	263	280	215AA.105.020	245	392
1662602.002	537	274	204AA200.020	261	338	215AB.004.020	251	472
1662605.002★	537	290	204AB104.020	265	333	215AB.004.021	251	592
1662607.002	536	384	204BA.104.020	264	235	215AB.004.222	251	592
1662607.013	536	538	204BA.105.020	264	240	215AB.104.020	249	472
1662607.278	536	577	204BA200.020	262	298	215AB.104.021	249	592
1662607.295	536	538	204BB104.020	266	293	215AB.104.222	249	592
1662609.002★	539	248	205AA.104.020	220	462	215BA.004.020	248	363
1662609.243	539	373	205AA.104.222	220	579	215BA.004.021	248	451
1662609.295★	539	347	2064011.002	450	329	215BA.004.222	248	451
1662641.002*	537	235	2064101.002	444	311	215BA.005.020	248	368
1662647.002	538	277	2064101.295	444	436	215BA.104.020	246	363
1680100.013	81 82	111	2064101P.002	340 400	40	215BA.104.021 215BA.104.222	246 246	451
1680100.013 1680100.013	92	111	2064101P.002 2064101P.002	400	40	215BA.104.222 215BA.105.020	246	451 368
1680100.243	81	202	2064101P.002 2064101P.002	445	40	215BB.004.020	240	448
1680100.243	82	202	2064101P.013	400	56	215BB.004.020	252	561
1680100.243	92	202	2064101P.278	400	60	215BB.004.222	252	561
1680100.278	81	118	2064101P.295	340	56	215BB.104.020	250	448
1680100.278	82	118	2064101P.295	400	56	215BB.104.021	250	561
1680100.278	92	118	2064101P.295	459	56	215BB.104.222	250	561
1680100.295	81	113	2064131.002	445	234	215CA.004.020	258	332
1680100.295	82	113	2064131.295	445	327	215CA.004.021	258	412
1680100.295	92	113	2064151.002	445	343	215CA.004.222	258	412
18CR.9312000T.075	54	342	2064151.295	445	482	215CA.104.020	257	332
18CR.9322100S.075	51	578	2064152.002	445	373	215CA.104.021	257	412
18CR.9351800.075	32	730	2064152.295★	445	524	215CA.104.222	257	412
18DB.6311800S.075	50	510	2064401.002	450	694	215CB.004.020	260	417
18DB.9291800.075	33	683	2064451.002	445	406	215CB.004.021	260	522
18DB.9311800S.075	49	578	2064451.295★	445	568	215CB.004.222	260	522
18DB.9321800T.075	53	342	2064461.002	445	406	215CB.104.020	259	417
18DB.9332211.075	39	573	2064461.295★	445	568	215CB.104.021	259	522
18DB.9351800.075	31	730	2064801.002	444	406	215CB.104.222	259	522
18DB.6291800.075	34	659	2064801.295*	444	568	215DA.004.020	258	269
18DB.6332211.075	40	603	2064831.002	444	406	215DA.004.021	258	335
18SB.10231800.075	29	630	2064831.295	444	568	215DA.004.222	258	335
18SB.10351800.075	28	710	2064F10101.002	444	299	215DA.104.020	257	269
	47	371	2064LDH101.002	444	289	215DA.104.021	257	335
18SB.6181600S.075 18SB.6231800S.075	44	391	2064LDH831.002	444	377	215DA.104.222	257	335

American Standard

Fixtures and Faucets

Product SKU	Page	List Price	Product SKU	Page	List Price	Product SKU	Page	List Price
215DB.004.021	260	445	2275509.002	362	151	2475500.F15.075	325	208
215DB.004.222	260	445	2275509.295	362	211	2475500M1.002★	325	138
215DB.104.020 215DB.104.021	259 259	354 445	238AA.104.020 238AA.104.021	219 219	452 566	2475540.002 2475550.002	326 326	145 150
215DB.104.222	259	445	238AA.104.222	219	566	2475550.F15.002	326	150
215FA.004.020	255	472	238AA.104CP.020	217	556	2535128.020	212	666
215FA.004.021	255	595	238AA.114.020	218	452	2544102.020	115	975
215FA.004.222	255	595	238AA.114CP.020	216	556	2544102.222	115	1,023
215FA.104.020	253	472	238AA.105.020	219	457	2544202.020	115	975
215FA.104.021	253 253	595 595	238AA.105CP.020 238AA.115.020	217	561	2544202.222	115	1,023
215FA.104.222 215FC.004.020	253	387	238AA.115.020 238AA.115CP.020	218 216	457 561	2545102.020 2545102.222	115 115	965 1,013
215FC.004.021	256	485	2390.202.011	128	540	2545202.020	115	965
215FC.004.222	256	485	2390.202.020	128	540	2545202.222	115	1,013
215FC.104.020	254	387	2390.202.021	128	703	2546004.020	80	3,232
215FC.104.021	254	485	2390.202.222	128	703	2555101P.002	483	42
215FC.104.222	254	485	2390.202ICH.020	128	596	2555101P.013	483	56
216AD.104.020 216BD.104.020	243 244	532 508	2391.202.011 2391.202.020	128 128	540 540	2555101P.278 2555101P.295	483	60 58
2175500.002	363	167	2391.202.020	128	703	2573.102.011	111	1,025
2175500.295	363	235	2391.202.222	128	703	2573.102.020	111	1,025
2175502.002	363	180	2391.202ICH.020	128	596	2573.202.011	111	1,025
2175502.295★	363	253	2392.202.020	129	821	2573.202.020	111	1,025
2175503.002	363	157	2392.202.021	129	1,034	2574.102.011	111	1,096
2175505.002	364	157	2392.202.222	129	1,034	2574.102.020	111	1,096
2175506.002 22DB.6332283C.075	363 58	157 352	2392.202ICH.020 2393.202.020	129 129	896 821	2574.202.011 2574.202.020	111	1,096
22DB.6332283S.075	63	247	2393.202.020	129	1,034	2645V.002.011	101	1,095
22DB.6332284S.075	63	247	2393.202.222	129	1,034	2645V.002.020	101	1,085
22SB.6151511S.075	61	158	2393.202ICH.020	129	896	2645V.002.222	101	1,116
22SB.6252283C.075	56	310	2394.202.020	130	635	2691.004.020	81	3,039
22SB.6252283S.075	60	210	2394.202.021	130	806	2742.002.011	114	1,364
22SB.6252284S.075	60	210	2394.202.222	130	806	2742.002.020	114	1,364
221AA.004.020	268	263	2394.202ICH.020	130	711	2742.048WC.020	114	3,605
221AA.004.021 221AA.004.222	268 268	330 330	2395.202.020 2395.202.021	130 130	635 806	2742.068C.020 2742.448WC.K2.020	114 114	4,008 6,568
221AA.004.222	268	274	2395.202.021	130	806	2748.002.011	113	1,237
221AA.104.020	267	263	2395.202ICH.020	130	711	2748.002.020	113	1,237
221AA.104.021	267	330	2396.202.020	131	1,051	2748.048WC.020	113	3,349
221AA.104.222	267	330	2396.202ICH.020	131	1,167	2748.068C.020	113	3,716
221AA.105.020	267	274	2397.202.020	131	1,051	2748.448WC.K2.020	113	6,378
221AB.004.020	270	329	2397.202ICH.020	131	1,167	2764.014.011	83	1,812
221AB.004.021 221AB.004.222	270 270	413 413	2403.128.020 2403.128.021	213 213	525 656	2764.014M202.011 2764.014M203.011	83 83	2,285 2,463
221AB.104.020	269	329	2403.128.222	213	656	2764.014M204.011	83	1,936
221AB.104.021	269	413	2403.813.020	213	584	2764951.002	337	816
221AB.104.222	269	413	2422.068C.020	98	2,478	2764951.002	356	816
221AB.105.020	269	348	2422V.002.011	98	929	2764951.278	337	1,224
221CA.004.020	272	224	2422V.002.020	98	929	2764951.278	356	1,224
221CA.004.021	272 272	278	2422V.002.222	98	977	2764951.295	337	1,115
221CA.004.222 221CA.104.020	272	278 224	2422V.418C.020 2422VC.020	98 98	3,628 1,663	2764951.295 2765.034.020	356 81	1,115 2,985
221CA.104.020 221CA.104.021	271	224	2422/0.020 2425.168C.020	98	2,557	2766.034.020	82	2,985
221CA.104.222	271	278	2425.268C.020	97	2,557	2767.034.020★	82	2,571
221CB.004.020	274	290	2425V-LHO.002.011	97	948	2770.002.020	122	960
221CB.004.021	274	361	2425V-LHO.002.020	97	948	2770.018W.020	122	1,691
221CB.004.222	274	361	2425V-LHO.002.222	97	997	2770.018WC.020	122	1,923
221CB.104.020	273	290	2425V-RHO.002.011	97	948	2771.002.020	121	1,017
221CB.104.021	273 273	361	2425V-RHO.002.020	97	948	2771.018W.020	121	1,752
221CB.104.222 221DA.004.020	273	361 184	2425V-RHO.002.222 2425V.518C.020	97 97	997 3,903	2771.018WC.020 2771.068C.020	121 99	1,992 2,567
221DA.004.020	276	227	2425V.618C.020	97	3,903	2771V.002.011	99	969
221DA.004.222	276	227	2425VC-LHO.020	97	1,659	2771V.002.020	99	969
221DA.104.020	275	184	2425VC-RHO.020	97	1,659	2771V.002.222	99	1,017
221DA.104.021	275	227	2460.002.011	126	1,029	2771V.418C.020	99	3,856
221DA.104.222	275	227	2460.002.020	126	1,029	2771VC.020	99	1,738
221DB.004.020	278	250	2460.002.222 2460.028W/C 020	126	1,224	2772.002.020 2772.018W.020	120	1,058
221DB.004.021 221DB.004.222	278 278	310 310	2460.028WC.020 2461.002.011	126 126	3,155 1,029	2772.018W.020 2772.018WC.020	120 120	1,840 2,076
221DB.004.222 221DB.104.020	278	250	2461.002.020	120	1,029	2773.002.020	120	1,079
221DB.104.021	277	310	2461.002.222	126	1,224	2773.018W.020	119	1,883
221DB.104.222	277	310	2461.028WC.020	126	3,155	2773.018WC.020	119	2,116
2275500.002	362	134	2470.002.020★	127	1,534	2774.002.020	118	1,132
2275500.295	362	189	2475500.002	325	149	2774.018W.020	118	1,920
2275503.002 2275505.002	362 363	116 121	2475500.075 2475500.F15.002	325 325	208 149	2774.018WC.020 2775.002.020	118	2,154 1,442

American Standard

★ DISCONTINUED. Available while supplies last.

×
<u>e</u>
2
_

Product SKU	Page	List Price	Product SKU	Page	List Price	Product SKU	Page	List Price
2775.018W.020	117	2,279	2848.119.SRL	67	7,554	2946.BW.011	111	876
2775.018WC.020	117	2,563	2848.119.SRW	67	7,554	2946.BW.011	112	876
2776.102.020	123	1,046	2848.119.WLL	67	9,273	2946.STL.011	153	731
2776.118W.020	123	2,084	2848.119.WLW	67	9,273	2946.STR.011	153	731
2776.118WC.020 2776.202.020	123 123	2,300	2848.119.WRL 2848.119.WRW	67 67	9,273	2946.SW.011 2961A104SC.020	153 214	979 426
2776.218W.020	123	1,046 2,084	2848.509.ALL	72	9,273 6,136	2961A10450.020 297AA204-291	214	420
2776.218WC.020	123	2,084	2848.509.ALL 2848.509.ALW	72	6,136	2973.102.011	110	839
2786.128.020	209	974	2848.509.ARL	72	6,136	2973.102.020	110	839
2786.128.222	209	1,217	2848.509.ARW	72	6,136	2973.112.011	112	839
2786.813.020	209	979	2848.509.CLL	72	6,630	2973.202.011	110	839
2794.119.020*	233	689	2848.509.CLW	72	6,630	2973.202.020	110	839
2794.204.020	234	593	2848.509.CRL	72	6,630	2973.212.011	112	839
2795.119.020★	233	661	2848.509.CRW	72	6,630	2988.101.020	242	518
2795.204.020	234	565	2848.509.SLL	72	5,087	2988.813.020	242	524
281AA104.020	221	697	2848.509.SLW	72	5,087	2989.101.020	241	544
281AA104.222	221	874	2848.509.SRL	72	5,087	2989.813.020	241	550
281AA105.020	221	702	2848.509.SRW	72	5,087	3051.115.ALL	66	9,925
2848.105.ALL	69	7,526	2848.509.WLL	72	5,705	3051.115.ALW	66	9,925
2848.105.ALW	69	7,526	2848.509.WLW	72	5,705	3051.115.ARL	66	9,925
2848.105.ARL	69	7,526	2848.509.WRL	72	5,705	3051.115.ARW	66	9,925
2848.105.ARW	69	7,526	2848.509.WRW	72	5,705	3051.115.CLL	66	10,750
2848.105.CLL	69	8,465	2851A104.020	208	906	3051.115.CLW	66	10,750
2848.105.CLW	69	8,465	2851A104.222	208	1,132	3051.115.CRL	66	10,750
2848.105.CRL	69	8,465	2851A105.020	208	911	3051.115.CRW	66	10,750
2848.105.CRW	69	8,465	288AA.114.020	239	336	3051.115.SLL	66	7,634
2848.105.SLL	69	5,922	288AA.115.020	239	341	3051.115.SLW	66	7,634
2848.105.SLW	69	5,922	288CA.114.020	240	281	3051.115.SRL	66	7,634
2848.105.SRL	69	5,922	288DA.114.020	240	224	3051.115.SRW	66	7,634
2848.105.SRW	69	5,922	2886204.020	235	477	3051.115.WLL	66	9,467
2848.105.WLL	69	7,068	2886205.020	235	482	3051.115.WLW	66	9,467
2848.105.WLW	69	7,068	2886.218.020	236	477	3051.115.WRL	66	9,467
2848.105.WRL	69	7,068	2886.218.021	236	598	3051.115.WRW	66	9,467
2848.105.WRW	69	7,068	2886.218.222	236	598	3051.119.ALL	66	10,353
2848.109.ALL	69	7,955	2886.518.020	236	520	3051.119.ALW	66	10,353
2848.109.ALW 2848.109.ARL	69 69	7,955 7,955	2886.518.021 2886.518.222	236 236	650 650	3051.119.ARL 3051.119.ARW	66 66	10,353 10,353
2848.109.ARW	69	7,955	2887.218.020	230	422	3051.119.CLL	66	11,178
2848.109.CLL	69	8,894	2887.218.021	237	528	3051.119.CLW	66	11,178
2848.109.CLW	69	8,894	2887.218.222	237	528	3051.119.CRL	66	11,178
2848.109.CRL	69	8,894	2887.518.020	237	465	3051.119.CRW	66	11,178
2848.109.CRW	69	8,894	2887.518.021	237	580	3051.119.SLL	66	8,062
2848.109.SLL	69	6,350	2887.518.222	237	580	3051.119.SLW	66	8,062
2848.109.SLW	69	6,350	2889.218.020	238	365	3051.119.SRL	66	8,062
2848.109.SRL	69	6,350	2889.218.021	238	459	3051.119.SRW	66	8,062
2848.109.SRW	69	6,350	2889.218.222	238	459	3051.119.WLL	66	9,895
2848.109.WLL	69	7,496	2889.518.020	238	408	3051.119.WLW	66	9,895
2848.109.WLW	69	7,496	2889.518.021	238	511	3051.119.WRL	66	9,895
2848.109.WRL	69	7,496	2889.518.222	238	511	3051.119.WRW	66	9,895
2848.109.WRW	69	7,496	2891.128.020	207	974	3052.105.ALL	68	8,164
2848.115.ALL	67	9,303	2891.128.222	207	1,217	3052.105.ALW	68	8,164
2848.115.ALW	67	9,303	2891.200.020	206	1,066	3052.105.ARL	68	8,164
2848.115.ARL	67	9,303	2891.813.020	207	979	3052.105.ARW	68	8,164
2848.115.ARW	67	9,303	2903.002.020	124	970	3052.105.CLL	68	8,989
2848.115.CLL	67	10,127	2903.018WC.020	124	2,091	3052.105.CLW	68	8,989
2848.115.CLW	67	10,127	2917228.020	222	559	3052.105.CRL	68	8,989
2848.115.CRL	67	10,127	2917228.222	222	699	3052.105.CRW	68	8,989
2848.115.CRW	67	10,127	2917823.020	222	564	3052.105.SLL	68	6,216
2848.115.SLL	67	7,125	2922A.104.020	205	781	3052.105.SLW	68	6,216
2848.115.SLW	67	7,125	2922A.104.222	205	976	3052.105.SRL	68	6,216
2848.115.SRL	67	7,125	2922A.105.020	205	786	3052.105.SRW	68	6,216
2848.115.SRW	67	7,125	2932.002-D0.020	108	1,352	3052.105.WLL	68	7,599
2848.115.WLL	67	8,844	2932.002-D2.020	108	1,352	3052.105.WLW	68	7,599
2848.115.WLW	67	8,844	2934.002-D0.020	108	1,425	3052.105.WRL	68	7,599
2848.115.WRL	67	8,844	2934.002-D2.020	108	1,425	3052.105.WRW	68	7,599
2848.115.WRW	67	8,844	2938.002-D0.020	109	1,491	3052.109.ALL	68	8,592
2848.119.ALL	67	9,731	2938.002-D2.020	109	1,491	3052.109.ALW	68	8,592
2848.119.ALW	67	9,731	2940.002-D0.020	109	1,593	3052.109.ARL	68	8,592
2848.119.ARL	67	9,731	2940.002-D2.020	109	1,593	3052.109.ARW	68	8,592
2848.119.ARW	67	9,731	2946.102.011	110	844	3052.109.CLL	68	9,417
2848.119.CLL	67	10,556	2946.102.020	110	844	3052.109.CLW	68	9,417
2848.119.CLW	67	10,556	2946.112.011	112	844	3052.109.CRL	68	9,417
2848.119.CRL	67	10,556	2946.212.011	112	844	3052.109.CRW	68	9,417
	67	10,556	2946.202.011	110	844	3052.109.SLL	68	6,644
2848.119.CRW 2848.119.SLL	67	7,554	2946.202.020	110	844	3052.109.SLW	68	6,644

American Standard

Fixtures and Faucets

Product SKU	Page	List Price	Product SKU	Page	List Price	Product SKU	Page	List Price
3052.109.SRW	68	6,644	3060.105.CLL	68	9,791	3251A.101.020	268	174
3052.109.WLL	68	8,027	3060.105.CLW	68	9,791	3251A.101.021	268	219
3052.109.WLW	68	8,027	3060.105.CRL	68	9,791	3251A.101.222	268	219
3052.109.WRL	68	8,027	3060.105.CRW	68	9,791	3251A.101.020	269	174
3052.109.WRW	68	8,027	3060.105.SLL	68	7,247	3251A.101.021	269	219
3052.509.ALL	72	6,501	3060.105.SLW	68	7,247	3251A.101.222	269	219
3052.509.ALW	72	6,501	3060.105.SRL	68	7,247	3251A.101.020	270	174
3052.509.ARL	72	6,501	3060.105.SRW	68	7,247	3251A.101.021	270	219
3052.509.ARW	72	6,501	3060.105.WLL	68	8,508	3251A.101.222	270	219
3052.509.CLL	72	7,026	3060.105.WLW	68	8,508	3251C.101.020	271	135
3052.509.CLW	72	7,026	3060.105.WRL	68	8,508	3251C.101.021	271	167
3052.509.CRL	72	7,026	3060.105.WRW	68	8,508	3251C.101.222	271	167
3052.509.CRW	72	7,026	3060.109.ALL	68	9,394	3251C.101.020	272	135
3052.509.SLL	72	5,340	3060.109.ALW	68	9,394	3251C.101.021	272	167
3052.509.SLW	72	5,340	3060.109.ARL	68	9,394	3251C.101.222	272	167
3052.509.SRL	72	5,340	3060.109.ARW	68	9,394	3251C.101.020	273	135
3052.509.SRW	72	5,340	3060.109.CLL	68	10,220	3251C.101.021	273	167
3052.509.WLL	72	6,014	3060.109.CLW	68	10,220	3251C.101.222	273	167
3052.509.WLW	72	6,014	3060.109.CRL	68	10,220	3251C.101.020	274	135
3052.509.WRL	72	6,014	3060.109.CRW	68	10,220	3251C.101.021	274	167
3052.509.WRW	72	6,014	3060.109.SLL	68	7,676	3251C.101.222	274	167
3052OD.105.ALL-PC	71	8,214	3060.109.SLW	68	7,676	3251D.101.020	275	95
3052OD.105.ALW-PC	71	8,214	3060.109.SRL	68	7,676	3251D.101.021	275	116
3052OD.105.ARL-PC	71	8,214	3060.109.SRW	68	7,676	3251D.101.222	275	116
3052OD.105.ARW-PC	71	8,214	3060.109.WLL	68	8,937	3251D.101.020	276	95
3052OD.105.CLL-PC	71	8,423	3060.109.WLW	68	8,937	3251D.101.021	276	116
3052OD.105.CLW-PC	71	8,423	3060.109.WRL	68	8,937	3251D.101.222	276	116
3052OD.105.CRL-PC	71	8,423	3060.109.WRW	68	8,937	3251D.101.020	277	95
3052OD.105.CRW-PC	71	8,423	3060.509.ALL	72	6,731	3251D.101.021	277	116
3052OD.105.SLL-PC	71	6,210	3060.509.ALW	72	6,731	3251D.101.222	277	116
3052OD.105.SLW-PC	71	6,210	3060.509.ARL	72	6,731	3251D.101.020	278	95
3052OD.105.SRL-PC	71	6,210	3060.509.ARW	72	6,731	3251D.101.021	278	116
3052OD.105.SRW-PC	71	6,210	3060.509.CLL	72	7,254	3251D.101.222	278	116
3052OD.105.WLL-PC	71	7,728	3060.509.CLW	72	7,254	3252OD.105.ALL-PC	70	8,743
3052OD.105.WLW-PC	71	7,728	3060.509.CRL	72	7,254	3252OD.105.ALW-PC	70	8,743
3052OD.105.WRL-PC	71	7,728	3060.509.CRW	72	7,254	3252OD.105.ARL-PC	70	8,743
3052OD.105.WRW-PC	71	7,728	3060.509.SLL	72	5,767	3252OD.105.ARW-PC	70	8,743
3052OD.109.ALL-PC	71	8,643	3060.509.SLW	72	5,767	3252OD.105.CLL-PC	70	8,952
3052OD.109.ALW-PC	71	8,643	3060.509.SRL	72	5,767	3252OD.105.CLW-PC	70	8,952
3052OD.109.ARL-PC	71	8,643	3060.509.SRW	72	5,767	3252OD.105.CRL-PC	70	8,952
3052OD.109.ARW-PC	71	8,643	3060.509.WLL	72	6,336	3252OD.105.CRW-PC	70	8,952
3052OD.109.CLL-PC	71	8,852	3060.509.WLW	72	6,336	3252OD.105.SLL-PC	70	6,739
3052OD.109.CLW-PC	71	8,852	3060.509.WRL	72	6,336	3252OD.105.SLW-PC	70	6,739
3052OD.109.CRL-PC	71	8,852	3060.509.WRW	72	6,336	3252OD.105.SRL-PC	70	6,739
3052OD.109.CRW-PC	71	8,852	3060SH.LW	75	2,678	3252OD.105.SRW-PC	70	6,739
3052OD.109.SLL-PC	71	6,638	3060SH.RW	75	2,678	3252OD.105.WLL-PC	70	8,257
3052OD.109.SLW-PC	71	6,638	3075.000.020	241	422	3252OD.105.WLW-PC	70	8,257
3052OD.109.SRL-PC	71	6,638	3075.120.020	233	451	3252OD.105.WRL-PC	70	8,257
3052OD.109.SRW-PC	71	6,638	3075.120.020	234	451	3252OD.105.WRW-PC	70	8,257
3052OD.109.WLL-PC	71	8,156	3195A.101.020	223	284	3252OD.109.ALL-PC	70	9,172
3052OD.109.WLW-PC	71	8,156	3195A.101.222	223	354	3252OD.109.ALW-PC	70	9,172
3052OD.109.WRL-PC	71	8,156	3195A.101.020	225	284	3252OD.109.ARL-PC	70	9,172
3052OD.109.WRW-PC	71	8,156	3195A.101.222	225	354	3252OD.109.ARW-PC	70	9,172
3052OD.709.ALL-PC	73	7,518	3195A.101.020	227	284	3252OD.109.CLL-PC	70	9,381
3052OD.709.ALW-PC	73	7,518	3195A.101.021	227	354	3252OD.109.CLW-PC	70	9,381
3052OD.709.ARL-PC	73	7,518	3195A.101.222	227	354	3252OD.109.CRL-PC	70	9,381
3052OD.709.ARW-PC	73	7,518	3195A.101.020	229	284	3252OD.109.CRW-PC	70	9,381
3052OD.709.CLL-PC	73	8,048	3195A.101.021	229	354	3252OD.109.SLL-PC	70	7,167
3052OD.709.CLW-PC	73	8,048	3195A.101.222	229	354	3252OD.109.SLW-PC	70	7,167
3052OD.709.CRL-PC	73	8,048	3195B.101.020	223	241	3252OD.109.SRL-PC	70	7,167
3052OD.709.CRW-PC	73	8,048	3195B.101.222	223	299	3252OD.109.SRW-PC	70	7,167
3052OD.709.SLL-PC	73	5,942	3195B.101.020	225	241	3252OD.109.WLL-PC	70	8,686
3052OD.709.SLW-PC	73	5,942	3195B.101.222	225	299	3252OD.109.WLW-PC	70	8,686
3052OD.709.SRL-PC	73	5,942	3195B.101.020	228	241	3252OD.109.WRL-PC	70	8,686
3052OD.709.SRW-PC	73	5,942	3195B.101.021	228	299	3252OD.109.WRW-PC	70	8,686
3052OD.709.WLL-PC	73	7,032	3195B.101.222	228	299	3252OD.709.ALL-PC	73	8,071
3052OD.709.WLW-PC	73	7,032	3195B.101.020	230	241	3252OD.709.ALW-PC	73	8,071
3052OD.709.WRL-PC	73	7,032	3195B.101.021	230	299	3252OD.709.ARL-PC	73	8,071
3052OD.709.WRW-PC	73	7,032	3195B.101.222	230	299	3252OD.709.ARW-PC	73	8,071
3053.000.020	242	396	3195C.101.020	224	209	3252OD.709.CLL-PC	73	8,602
3053.120.020	233	423	3195C.101.020	226	209	3252OD.709.CLW-PC	73	8,602
3053.120.020	234	423	3195C.101.020	231	209	3252OD.709.CRL-PC	73	8,602
3060.105.ALL	68	8,966	3195C.101.020	232	209	3252OD.709.CRW-PC	73	8,602
		8,966	3251A.101.020	267	174	3252OD.709.SLL-PC	73	6,494
3060.105.ALW	68			0.07	010	20500D 700 CLW DO	70	6 40 4
3060.105.ALW 3060.105.ARL 3060.105.ARW	68 68	8,966 8,966	3251A.101.021 3251A.101.222	267 267	219 219	3252OD.709.SLW-PC 3252OD.709.SRL-PC	73 73	6,494 6,494

American Standard

★ DISCONTINUED. Available while supplies last.

_
G
פ
<u> </u>

Product SKU	Page	List Price	Product SKU	Page	List Price	Product SKU	Page	List Price
32520D.709.SRW-PC	73	6,494	3517C.101.020	257	220	3829000.002	158	101
3252OD.709.WLL-PC	73	7,585	3517C.101.020	260	220	3829000.295	158	152
3252OD.709.WLW-PC	73	7,585	3517C.101.020	259	220	3838AMFCOL.218	149	990
3252OD.709.WRL-PC	73	7,585	3517C.101.020	258	220	3851A101.020	221	376
3252OD.709.WRW-PC	73	7,585	3517C.101.021	258	273	3851A101.222	221	471
3260.215.ALL	66	10,727	3517C.101.021	260	273	3870A.101.020	220	235
3260.215.ALW	66	10,727	3517C.101.021	257	273	3870A.101.222	220	294
3260.215.ARL	66	10,727	3517C.101.021	259	273	3875501.002	372	320
3260.215.ARW	66	10,727	3517C.101.222	259	273	3875501.295★	372	447
3260.215.CLL	66	11,552	3517C.101.222	257	273	3875509.002	372	342
3260.215.CLW	66	11,552	3517C.101.222	258	273	3875509.295★	372	480
3260.215.CRL	66	11,552	3517C.101.222	260	273	3970A101-291	280	955
3260.215.CRW	66	11,552	3517D.101.020	257	157	4000.101.020	242	122
3260.215.SLL	66	8,550	3517D.101.020	260	157	4000.101.020	242	122
3260.215.SLW	66	8,550	3517D.101.020	259	157	4000.119.020*	233	238
3260.215.SRL	66	8,550	3517D.101.020	258	157	4000.204.020	234	142
3260.215.SRW	66	8,550	3517D.101.021	258	196	4000.813.020	241	128
3260.215.WLL	66	10,269	3517D.101.021	260	196	4000.813.020	242	128
3260.215.WLW	66	10,269	3517D.101.021	257	196	4133A.114.020	239	114
3260.215.WRL	66	10,269	3517D.101.021	259	196	4133A.114.020	240	114
3260.215.WRW	66	10,269	3517D.101.222	259	196	4133A.115.020	239	119
3260.219.ALL	66	11,155	3517D.101.222	257	196	4133A204.020	235	255
3260.219.ALW	66	11,155	3517D.101.222	258	196	4133A205.020	235	260
3260.219.ARL	66	11,155	3517D.101.222	260	196	4133A.218.020	236	255
260.219.ARW	66	11,155	3517F.101.020	253	275	4133A.218.020	237	255
260.219.CLL	66	11,981	3517F.101.020	256	275	4133A.218.020	238	255
260.219.CLW	66	11,981	3517F.101.020	255	275	4133A.218.021	236	319
260.219.CRL	66	11,981	3517F.101.020	254	275	4133A.218.021	237	319
260.219.CRW	66	11,981	3517F.101.021	254	346	4133A.218.021	238	319
3260.219.SLL	66	8,979	3517F.101.021	256	346	4133A.218.222	236	319
3260.219.SLW	66	8,979	3517F.101.021	253	346	4133A.218.222	237	319
3260.219.SRL	66	8,979	3517F.101.021	255	346	4133A.218.222	237	319
3260.219.SRW	66		3517F.101.222	255	346	4133A.518.020		298
		8,979					236	
3260.219.WLL	66	10,697	3517F.101.222	253	346	4133A.518.020	237	298
3260.219.WLW	66	10,697	3517F.101.222	254	346	4133A.518.020	238	298
3260.219.WRL	66	10,697	3517F.101.222	256	346	4133A.518.021	236	371
3260.219.WRW	66	10,697	3519A.101.020	261	175	4133A.518.021	237	371
3271101.020	222	238	3519A.101.020	263	175	4133A.518.021	238	371
3271101.222	222	296	3519A.101.020	265	175	4133A.518.222	236	371
3275501.002	365	191	3519B.101.020	262	135	4133A.518.222	237	371
3275502.002	365	226	3519B.101.020	264	135	4133A.518.222	238	371
3275505.002	365	178	3519B.101.020	266	135	4175100.002	323	269
3375502.002	365	268	3520.000.002	174	82	4175100.075	323	349
3385A.100CP.020	217	339	3520.000.295	174	101	4175100.F15.002	323	269
3385A.100CP.020	216	339	3520.000.002	194	82	4175100.F15.075	323	349
3385A.101.020	218	235	3520.000.295	194	101	4175300.002	323	303
3385A.101.020	219	235	3571.002.020	103	1,260	4175300.075	323	385
3385A.101.021	219	294	3571.048WC.020	103	3,629	4175300.F15.002★	323	303
3385A.101.222	219	294	3571.448WC.K2.020	103	6,199	4175300.F15.075★	323	385
475.501.002	365	760	3572.002.020	103	1,322	4175500.002 *	324	207
								207
517A.101.020	243	275	3572.048WC.020	104	3,764	4175500.F15.002	324	
8517A.101.020	245	275	3572.448WCK2.020	104	6,550	4175501.002	323	247
517A.101.020	247	275	3573.002.020	105	1,347	4175501.F15.002	323	247
517A.101.020	249	275	3573.048WC.020	105	3,764	4175503.002★	324	247
517A.101.020	251	275	3573.448WCK2.020	105	6,664	4175503.F15.002★	324	247
517A.101.021	245	343	3574.002.020	106	1,387	4175700.002	322	160
517A.101.021	247	343	3574.048WC.020	106	3,786	4175700.F15.002★	322	160
517A.101.021	249	343	3574.448WC.K2.020	106	6,393	4175701.002★	322	189
517A.101.021	251	343	3575.002.020	107	1,493	4175701.F15.002★	322	189
517A.101.222	245	343	3575.048WC.020	107	3,895	4175703.002★	322	189
517A.101.222	247	343	3575.448WC.K2.020	107	6,797	4175703.F15.002	322	189
517A.101.222	249	343	3705216.020	235	222	4188A.004.020	247	112
517A.101.222	251	343	3705216.020	239	222	4188A.004.021	247	139
3517B.101.020	248	251	3705216.020	236	222	4188A.004.222	247	139
517B.101.020	246	251	3705216.021	236	279	4188A.004.020	248	112
3517B.101.020	244	251	3705216.222	236	279	4188A.004.021	248	139
3517B.101.020	250	251	3706.216.020	240	167	4188A.004.222	248	139
517B.101.020	250	251	3706.216.020	240	167	4188A.004.020	246	112
517B.101.021	246	312	3706.216.021	237	209	4188A.004.021	256	139
517B.101.021	250	312	3706.216.222	237	209	4188A.004.222	256	139
8517B.101.021	252	312	3708.216.020	240	110	4188A.004.020	258	112
3517B.101.021	248	312	3708.216.020	238	110	4188A.004.021	258	139
3517B.101.222	248	312	3708.216.021	238	140	4188A.004.222	258	139
3517B.101.222	252	312	3708.216.222	238	140	4188A.005.020	247	117
3517B.101.222	250	312	3749.000.002	162	103	4188A.005.020	248	117

American Standard

4188.465.021 293 215 4193.465.222 275 111 4225.174.04.02 220 220 4188.466.202 236 125 4192.106.202 271 100 4270.104.02 220	Product SKU	Page	List Price	Product SKU	Page	List Price	Product SKU	Page	List Price
4148.04.02.2 229 215 4148.04.05.00 220 111 4270.151.020 220 220 4148.04.05.00 283 155 4182.110.000 275 100 4275.050.071.002 325 10 4188.07.00 284 110 4275.050.071.002 325 10 4275.050.071.002 325 12 4188.07.01.00 244 110 4275.050.071.002 325 13 448.01.01.00 325 134 4275.050.071.002 325 134 4275.050.071.002 324 100 4275.050.071.002 324 100 4275.050.071.002 324 100 449.01.012 244 134 4275.050.071.002 324 100 449.01.012 244 134 4275.050.071.002 324 100 449.01.012 244 134 449.01.012 244 134 449.01.012 244 134 449.01.012 244 134 449.01.012 244 134 449.01.012 247 1164 4275.00.075 000 304 4		293	173	4192A.104.222	271	111	4225A.164.020	292	251
4488.06.00 283 190 4498.06.00 271 100 4278.01.022 235 191 4488.06.00 283 125 4198.01.00.00 267 100 427560.10.02 335 191 4198.01.01.00 245 112 4198.01.00.00 267 100 4275601.002 335 22 4198.01.01.00 246 112 4198.01.00.00 277 134 4275501.002 334 20 4198.01.01.00 257 112 4198.01.60.00 234 134 4275501.002 334 20 4198.01.01.01 264 133 4198.01.60.01 275 108 4275501.00 344 24 4198.01.00.01 264 133 4198.01.40.01 277 108 427550.00 344 24 4198.01.00.01 264 134 4198.01.40.01 287 138 4198.01.40.01 288 284 24 4198.01.00.01 281 134 4198.01.40.01 281 275<									307
4148A 4293 105 4149A 4160 275 100 427550 15 325 10 4148A 4160 246 112 4160 400 247 100 427550 175 325 325 325 325 325 325 325 325 325 324 325 325 324 325 325 324 325 325 324 325 324 325 324 325 324 334									227
4148A.01/2020 238 100 41725001.50.02 335 100 4168A.100.200 246 112 4168A.100.200 241 100 4275501.50.02 335 122 4168A.100.200 246 112 4168A.100.20 277 134 4275551.00.2 334 200 4168A.100.20 257 112 4168A.100.20 257 134 4275551.00.2 334 234 4168A.100.21 246 139 4168A.100.21 277 166 4275551.07.5 334 234 4168A.100.21 246 139 4168A.154.22 271 166 4275551.15.07.5 334 234 4168A.101.22 234 139 4169A.154.22 271 166 427550.137.5 334 234 4168A.101.22 237 139 4169A.154.22 237 166 427560.03 393 66 4168A.101.22 237 139 4169A.154.22 237 166 42740.00.27 393 438 </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>193</td>									193
4188.110.000 246 112 4192.154.020 271 134 427550.002 335 222 4188.110.000 257 112 4192.154.020 277 134 427555.002 334 20 4188.110.001 257 112 4192.154.021 271 166 427551.075 334 24 4188.110.001 257 139 4192.154.021 277 166 427551.15.002 334 23 4188.110.021 257 139 4192.154.021 267 166 427500.002 334 23 4188.110.222 246 139 4192.154.222 275 166 427800.002 309 60 4188.110.222 257 139 4192.154.222 267 166 427800.075 309 60 4188.101.222 257 139 4192.154.222 267 166 427800.075 309 60 33 4188.101.222 257 139 4192.164.020 274 164 <td< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>193</td></td<>									193
4188.10.000 254 112 4192.154.020 276 134 427550.02 324 20 4188.10.001 245 139 4192.154.020 294 134 427555.002 324 23 4188.10.001 246 139 4192.154.021 271 166 427551.075 334 43 4188.10.001 254 139 4192.154.021 275 166 427551.150.074 334 43 4188.10.10.222 246 139 4192.154.021 294 166 427590.0173 399 55 4188.10.222 254 139 4192.154.222 277 166 42780.075 399 55 4188.10.202 246 117 4192.154.222 247 166 42780.075 399 39 33 4188.10.202 293 175 4192.00.20 278 156 4279.00.075 399 39 33 4188.10.202 293 175 4192.00.40.20 278 156	4188A.104.020	245	112	4192A.105.020	294	100	4275501.002	325	229
4188.10.020 277 112 4192.154.020 294 134 427551.022 334 232 4188.10.021 246 139 4192.154.021 271 166 427551.02 334 332 4188.10.021 246 139 4192.154.021 275 166 427551.15.075 334 332 4188.10.021 277 139 4192.154.021 277 166 427590.002 334 432 4188.10.222 286 139 4192.154.222 271 166 427890.013 399 59 4188.10.222 287 133 4192.154.222 297 166 427890.075 399 39 4188.10.020 284 117 4192.154.222 297 165 427890.075 399 39 4188.150.020 298 117 4192.000 276 155 427890.075 399 39 4188.150.020 298 117 4192.000.021 278 194 427890.075	4188A.104.020	246	112			134	4275501.F15.002★	325	229
4188.10.021 246 139 4192.154.02 244 134 427551.02 334 24 4188.10.021 254 139 4192.154.021 271 166 427551.075 334 23 4188.10.021 257 139 4192.154.021 275 166 427551.15.002+ 334 24 33 4188.10.1222 245 139 4192.154.021 297 166 42760.007 309 456 4188.10.1222 254 139 4192.154.222 277 166 42780.007 309 60 4188.10.202 257 169 42780.007 309 60 4198.105.00 298 117 4192.00.20 278 156 42780.007 309 33 34 348.15.02 298 107 4192.00.20 278 156 427810.073 309 34 34 34 34 34 34 34 34 34 34 34 34 34 34 34									205
4188.10.02.01 246 139 4192.A.154.021 271 166 427651.175.00* 324 33 4188.10.02.01 257 139 4192.A.154.021 297 166 427651.175.00* 324 33 4188.10.02.22 245 139 4192.A.154.021 297 166 427830.013 399 55 4188.104.22 246 139 4192.A.154.221 271 166 427830.013 399 56 4188.104.22 257 139 4192.A.154.222 267 166 427830.013 399 56 4188.105.020 246 117 4192.A.154.222 267 166 427840.0175 309 30 4188.105.020 246 117 4192.A.154.222 267 156 427400.0175 309 33 4188.150.020 238 117 4192.A.164.020 274 155 42740.0175 309 33 4188.154.020 233 215 4192.B.04.020 276 155 42740.077 309 44 4188.154.222 233 215 4192.B.04.020 276 155 42740.075 309 43 4188.154.222 233 150 4192.B.04.020									205
4188.10.021 257 138 4192.154.021 275 166 427651.15.002+ 324 234 4188.104.022 245 138 4192.154.021 267 166 427650.1575/* 336 338 433 4188.104.222 245 139 4192.154.021 271 166 427830.012 309 46 4188.104.222 257 139 4192.154.222 257 166 427830.075 309 50 4188.105.020 245 117 4192.154.222 297 156 427840.013 309 23 4188.105.020 246 117 4192.164.020 274 155 427840.013 308 33 4188.150.02 283 173 4492.104.020 270 155 427840.075 308 33 4188.150.02 283 215 4492.104.020 270 155 4278410.075 309 46 4188.150.02 283 215 4492.104.021 270 154 4279410.075 309 46 4188.160.02 283 156 <t< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>335</td></t<>									335
4188.10-0.01 297 190 4192A.154.021 294 190 4228.155.075+ 324 33 4188.10-222 246 139 4192A.154.222 271 196 427800.013 309 456 4188.10-222 254 139 4192A.154.222 271 196 427800.013 309 456 4188.105.020 245 117 4192A.154.222 297 196 4278400.013 309 450 4188.105.020 246 117 4192B.04.020 274 155 427840.015 309 33 4188.115.020 283 117 4192B.04.020 274 155 427840.015 309 33 4188.115.020 283 215 4192B.04.021 274 194 4279410.013 309 46 4188.156.020 283 155 4192B.04.021 276 194 4279410.013 309 46 4188.04.020 283 156 4192B.04.021 276 194 427971.027 309 46 4188.04.020 281 197 4192B.04.222 </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>240</td>									240
4188.104.222 246 139 4122.154.222 271 166 427890.013 309 56 4188.104.222 257 139 4128.154.222 276 166 427890.075 309 50 4188.105.020 245 117 4128.154.222 287 166 427890.0278 309 50 4188.105.020 245 117 4128.154.222 284 166 427840.013 309 33 4188.105.020 243 117 4128.164.020 274 155 427940.0278 309 33 4188.154.021 233 117 4128.104.020 276 155 427940.0278 309 36 4188.154.021 233 215 4128.004.020 276 155 427940.013 309 46 4188.154.020 293 205 4128.004.021 278 194 427971.013 309 46 4188.156.020 293 155 4128.004.021 276 194 427971.013 309 42 4188.004.020 255 197 4128.004.22 278 194 427971.013 309 42 4188.004.020 255 197 4128.004.02 273 155 </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>4275551.F15.075★</td> <td></td> <td>335</td>							4275551.F15.075★		335
4188.104.222 224 119 4192.154.222 275 196 427390.075 309 98 4188.105.620 246 117 4192.154.222 287 196 4279400.075 309 98 4188.105.620 246 117 4192.164.020 244 196 4279400.075 309 339 4188.105.620 233 117 4192.164.020 274 155 4279400.075 300 33 4188.165.620 233 117 4192.04.620 274 155 4279400.075 300 33 4188.154.020 233 117 4192.04.620 274 194 4279.10.02 309 48 4188.154.020 233 155 4192.00.4.021 276 194 4279.10.075 309 48 4188.154.020 233 150 4192.00.4.021 276 194 4279.10.075 309 48 4188.164.020 233 155 4192.00.4.021 276 194 4279.10.075 309 44 4188.04.020 255 197 4192.00.4.22 276 194 4279.10.075 313 309 44 4188.00.4.020 255 197 4192.00.4.22	4188A.104.222								468
4188.104.222 257 119 4182.154.222 267 1166 42780.00278 309 692 4188.105.020 246 117 4182.154.222 234 1160 4279400.013 309 303 4188.105.020 233 117 4182.04.020 274 155 427840.0278 308 333 4188.1154.021 233 125 4182.004.020 276 155 427840.075 309 468 4188.154.021 233 255 4182.004.021 276 194 427841.013 309 468 4188.156.020 233 155 4182.004.021 270 194 4278710.075 309 438 4188.146.020 233 155 4182.004.222 276 194 4278710.075 309 448 4188.146.020 255 197 4182.004.222 276 194 4278710.075 313 44 4188.004.020 255 197 4182.004.222 277 194 428500.0									562
4188.105.020 245 117 4192.164.022 294 106 427400.013 399 33 4188.105.020 246 117 4192.164.020 274 155 427400.013 399 33 4188.156.020 293 117 4192.004.020 274 155 427400.015 399 33 4188.154.021 283 215 4192.004.020 270 155 427410.025 399 438 4188.154.021 283 215 4192.004.021 274 194 4277410.075 399 468 4188.156.020 293 150 4192.004.021 270 194 427971.013 399 468 4188.040.020 283 150 4192.004.022 278 194 4279701.026 399 448 4188.004.020 283 197 4192.004.020 273 155 428500.175 313 309 44 4188.004.020 285 197 4192.004.020 273 155 428500.175 313 44 44 4188.004.021 281 <td< td=""><td></td><td></td><td></td><td></td><td>1</td><td></td><td></td><td></td><td>562</td></td<>					1				562
4188.105.020 246 117 4192.04.164.020 244 105 427400.013 309 33 4188.105.020 233 117 4192.004.020 278 155 4279400.075 309 33 4188.154.021 233 215 4192.004.020 270 155 4279400.075 309 36 4188.154.021 233 205 4192.004.021 274 194 4279410.03 309 46 4188.156.020 233 155 4192.004.021 278 194 4279710.278 309 46 4188.140.020 233 155 4192.004.022 278 194 4279710.02 309 43 4188.040.020 233 155 4192.004.222 278 194 427970.103 309 44 4188.004.020 252 197 4192.004.020 277 155 427970.1075 319 44 447970.1075 313 44 4188.004.021 255 197 4192.104.020 277 155 427970.1075 313 36 4188.004.021 313									276
4188A, 105,020 293 117 41928, 004,020 274 155 4279400,275 309 33 4188A, 154,021 293 215 41928, 004,020 270 155 4279410,002 309 43 4188A, 154,021 293 215 41928,004,021 274 194 4279410,013 309 44 4188A, 156,020 293 156 41928,004,021 278 194 4279410,075 309 44 4188A, 166,020 293 156 41928,004,222 278 194 4279701,02 309 43 4188B, 046,020 251 197 41928,004,222 278 194 4279701,075 309 44 4188B,004,020 255 197 41928,104,020 277 155 428001,175,002* 314 42 4188B,004,021 255 197 41928,104,021 277 194 428051,075 313 44 4188B,004,021 255 249 41928,104,021 277 194 428051,075 313 44 4188B,004,222 251 249 </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>331</td>									331
4188.154.021 293 215 41928.00.020 270 155 4278410.002 909 38 4188.154.222 233 215 41928.00.021 274 194 4279410.013 309 46 4188.156.020 233 205 41928.00.021 278 194 4279410.278 309 46 4188.156.020 233 156 41928.00.222 274 194 4279701.02 309 43 4188.04.020 233 209 41928.00.222 278 194 4279701.03 309 44 4188.04.020 255 197 41928.00.222 270 194 4279701.075 309 44 4188.004.020 255 197 41928.10.020 277 155 428001.75.4 314 42 4188.004.021 251 197 41928.10.021 277 194 428051.02* 313 36 4188.004.021 251 249 41928.10.021 277 194 428051.075 313 46 4188.004.021 255 249 41928.10.022									331
4188.154.22 293 215 41928.004.021 274 194 4279.410.013 309 46 4188.155.020 293 205 41928.004.021 270 194 4279.410.075 309 46 4188.165.020 293 150 41928.004.222 274 194 4279701.02 309 43 4188.165.020 293 155 41928.004.222 278 194 4279701.075 309 42 4188.004.020 251 197 41928.004.222 270 194 4279701.075 309 44 4188.004.020 255 197 41928.104.020 277 155 4285001.075 + 314 42 4188.004.020 260 197 41928.104.021 277 154 4285051.075 313 44 4188.004.021 255 249 41928.104.021 277 194 4285051.075 313 44 4188.004.021 255 249 41928.104.222 277 194 428501.075 313 44 41888.004.22 251 249 4192	4188A.154.020	293	173	4192B.004.020	278	155	4279400.278	309	358
$ \begin{array}{ccccccccccccccccccccccccccccccccccc$									385
4188A.164.020 293 150 4192B.004.021 270 194 4279410.278 309 439 4188A.165.020 293 155 4192B.004.222 278 194 4279701.073 309 432 4188B.004.020 251 197 4192B.104.020 273 155 4279701.075 309 44 4188B.004.020 255 197 4192B.104.020 273 155 4285001.075+ 314 42 4188B.004.021 255 197 4192B.104.021 273 154 428501.02+ 313 36 4188B.004.021 251 249 4192B.104.021 273 194 428501.02+ 313 36 4188B.004.021 252 249 4192B.104.021 277 194 428501.075 313 36 4188B.004.021 255 249 4192B.104.022 277 194 428510.075 313 36 4188B.004.222 251 249 4192B.105.020 277 174 428510.075 313 43 4188B.004.222 255 249 <									463
4188A.165.020 293 155 4192B.004.222 278 194 4279701.002 309 432 4188B.004.020 251 197 4192B.004.222 270 194 4279701.075 309 442 4188B.004.020 252 197 4192B.104.020 273 155 4279701.278 309 44 4188B.004.020 255 197 4192B.104.020 277 155 428500.075 + 314 42 4188B.004.021 251 249 4192B.104.021 277 194 4285051.075 313 36 4188B.004.021 255 249 4192B.104.021 277 194 4285051.075 313 36 4188B.004.021 280 249 4192B.104.021 297 194 4285051.075 313 36 4188B.004.222 255 249 4192B.104.021 296 194 428510.075 313 36 4188B.004.222 251 249 4192B.104.020 273 174 428510.075 313 44 4188B.004.222 252 249									463 496
4488A.174.020 293 209 4192B.004.222 278 194 4279701.013 309 42 4188B.004.020 251 197 4192B.104.020 273 155 4279701.75 309 42 4188B.004.020 255 197 4192B.104.020 273 155 4285001.075+ 314 42 4188B.004.021 265 197 4192B.104.021 273 194 428501.075 313 46 4188B.004.021 252 249 4192B.104.021 277 194 428501.02+ 313 36 4188B.004.021 255 249 4192B.104.021 277 194 428501.075 313 36 4188B.004.22 251 249 4192B.104.222 277 194 428510.075 313 34 4188B.004.22 255 249 4192B.105.020 277 174 428510.075 313 43 4188B.004.22 265 249 4192B.105.020 277 174 42851									358
$\begin{array}{c c c c c c c c c c c c c c c c c c c $									429
$\begin{array}{c c c c c c c c c c c c c c c c c c c $	4188B.004.020	251	197	4192B.004.222	270	194	4279701.075	309	429
41888.004.0202601974192B.104.0202691554285001.F15.002*31432441888.004.0212512494192B.104.0212731944285051.0023133641888.004.0212552494192B.104.0212771944285051.0753133641888.004.0212602494192B.104.0212691944285051.0753133641888.004.0212602494192B.104.2222771944285100.0023133541888.004.2222512494192B.104.2222771944285100.0753134441888.004.2222552494192B.105.0202771744285100.0753134441888.004.2222602494192B.105.0202771744285300.0753134541888.004.2222602494192B.105.0202771744285300.0753134541888.004.2202831994192B.105.0202741744285300.0753134441888.004.0202931974205104.0023182764285410.0753144041888.104.0202501974205104.0753183584285410.0753144041888.104.020259197421628.0202213214285410.0753144041888.104.020259197421628.02022132142854.10.4222252941888.104.021 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>468</td>									468
4188B.004.0212512494192B.104.0212731944285051.002313364188B.004.0212552494192B.104.0212771944285051.075313364188B.004.0212552494192B.104.0212991944285051.075313364188B.004.0212602494192B.104.222273194428501.075313354188B.004.2222512494192B.104.2222771944285100.075313344188B.004.2222552494192B.105.0202731744285100.075.075*313444188B.004.2222602494192B.105.0202771744285300.002313444188B.005.0202891994192B.105.0202941744285300.075313444188B.104.0202501974205104.0023182764285410.002314324188B.104.0202531974205104.0753183584285410.075314324188B.104.0202531974205104.0753182764285410.075314324188B.104.0202531974216228.0202213214326A.104.020225294188B.104.021249249441628.0202213214326A.104.020225294188B.104.021250249441628.0202213264327A.104.020226294188B.104.021 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>425</td>									425
4188B.004.021 252 249 $4192B.104.021$ 277 194 4285051.075 313 446 $4188B.004.021$ 255 249 $4192B.104.021$ 269 194 4285051.075 313 353 $4188B.004.021$ 265 249 $4192B.104.222$ 273 194 4285100.002 313 353 $4188B.004.222$ 252 249 $4192B.104.222$ 269 194 4285100.075 313 444 $4188B.004.222$ 255 249 $4192B.105.020$ 273 174 4285100.075 313 445 $4188B.004.222$ 260 249 $4192B.105.020$ 277 174 4285100.075 313 445 $4188B.004.222$ 260 249 $4192B.105.020$ 277 174 4285300.075 313 453 $4188B.004.220$ 233 199 $4192B.105.020$ 294 174 4285300.075 313 414 $4188B.104.020$ 250 197 4205104.002 318 276 4285410.002 314 423 $4188B.104.020$ 253 197 4205104.075 318 358 4285410.075 314 420 $4188B.104.021$ 249 249 2416228.020 221 321 $4285410.175.002$ 314 323 $4188B.104.021$ 255 249 4216228.022 221 403 $4326A.104.020$ 225 229 $4188B.104.021$ 259 249 4216228.222									328
$\begin{array}{c c c c c c c c c c c c c c c c c c c $									468
$41888.004.021$ 260 249 $41928.104.222$ 273 194 4285100.002 313 353 $41888.004.222$ 251 249 $41928.104.222$ 277 194 4285100.775 313 443 $41888.004.222$ 255 249 $41928.105.020$ 273 174 $4285100.F15.075 \star$ 313 443 $41888.004.222$ 255 249 $41928.105.020$ 273 174 $4285100.F15.224 \star$ 313 443 $41888.004.222$ 260 249 $41928.105.020$ 277 174 4285300.075 313 441 $41888.005.020$ 294 174 4285300.075 313 453 $41888.104.020$ 293 199 $41928.105.020$ 294 174 $4285300.F15.002 \star$ 313 414 $41888.104.020$ 250 197 4205104.075 318 356 4285410.075 314 420 $41888.104.020$ 253 197 421628.020 221 324 4285410.075 314 420 $41888.104.021$ 249 249 421628.020 222 321 $4326A.104.020$ 226 292 $41888.104.021$ 259 249 421628.222 221 403 $4326A.104.020$ 226 292 $41888.104.021$ 259 249 421628.222 222 4326 $4327A.104.020$ 223 363 $41888.104.021$ 253 249 4216823.020 221 326 $4327A.104.0$									360
$4188B.004.222$ 252 249 $4192B.104.222$ 269 194 $4285100.F15.075 \pm$ 313 433 $4188B.004.222$ 255 249 $4192B.105.020$ 273 174 $4285300.075 \pm$ 313 445 $4188B.005.020$ 293 199 $4192B.105.020$ 269 174 $4285300.075 \pm$ 313 441 $4188B.005.020$ 293 199 $4192B.105.020$ 269 174 $4285300.075 \pm$ 313 441 $4188B.104.020$ 249 197 $4192B.105.020$ 294 174 $4285300.75 \pm$ 313 441 $4188B.104.020$ 250 197 4205104.075 318 358 $4285410.075 \pm$ 314 420 $4188B.104.020$ 253 197 4205104.075 318 358 $4285410.075 \pm$ 314 420 $4188B.104.021$ 249 249 4216228.020 221 321 $4326A.104.020$ 225 292 $4188B.104.021$ 253 249 4216228.222 221 403 $4326A.104.020$ 226 293 $4188B.104.021$ 253 249 4216228.222 222 $4327A.104.020$ 223 293 $4188B.104.222$ 249 4216228.020 222 3326 $4327A.104.020$ 224 298 $4188B.104.222$ 249 4216228.020 222 3326 $4327A.104.020$ 223 293 $4188B.104.222$ 249 4216228.020 230 220 $433200.075 $	4188B.004.021	260	249	4192B.104.222	273	194		313	358
$4188B.004.222$ 255 249 $4192B.105.020$ 273 174 $4285100.F15.224 \star$ 313 445 $4188B.004.222$ 260 249 $4192B.105.020$ 277 174 4285300.002 313 411 $4188B.005.020$ 293 199 $4192B.105.020$ 269 174 4285300.075 313 52 $4188B.104.020$ 249 197 $4192B.105.020$ 294 174 $4285300.F15.002 \star$ 313 414 $4188B.104.020$ 250 197 4205104.002 318 276 4285410.002 314 322 $4188B.104.020$ 253 197 4205104.075 318 358 4285410.075 314 404 $4188B.104.021$ 249 249 4216228.020 221 321 4285410.4020 225 292 $4188B.104.021$ 250 249 4216228.020 222 321 $4326A.104.020$ 225 292 $4188B.104.021$ 255 249 4216228.222 221 403 $4326A.104.020$ 226 299 $4188B.104.021$ 255 249 4216228.020 222 326 $4327A.104.020$ 223 293 $4188B.104.222$ 249 421623.020 222 326 $4327A.104.020$ 224 293 $4188B.104.222$ 249 4216823.020 222 326 $4327A.104.020$ 224 293 $4188B.104.222$ 250 249 $4225A.004.020$ 229 220 <	4188B.004.222					194	4285100.075		441
$4188B.004.222$ 260 249 $4192B.105.020$ 277 174 4285300.002 313 414 $4188B.005.020$ 293 199 $4192B.105.020$ 269 174 4285300.075 313 52 $4188B.104.020$ 249 197 $4192B.105.020$ 294 174 4285300.75 313 411 $4188B.104.020$ 250 197 4205104.002 318 276 $4285410.002 \star$ 314 322 $4188B.104.020$ 253 197 4205104.075 318 588 4285410.755 314 400 $4188B.104.020$ 259 197 4216228.020 221 321 4285410.755 314 322 $4188B.104.021$ 249 249 4216228.020 222 321 $4326A.104.020$ 225 299 $4188B.104.021$ 253 249 4216228.222 221 403 $4326A.104.020$ 226 299 $4188B.104.021$ 253 249 4216228.222 222 403 $4326A.104.020$ 226 299 $4188B.104.021$ 259 249 421628.020 221 326 $4327A.104.020$ 223 299 $4188B.104.222$ 249 249 421628.020 229 220 433201075 311 52 $4188B.104.222$ 259 249 421628.020 229 221 326 $4327A.104.020$ 224 299 $4188B.104.222$ 253 249 $4225A.004.020$ <									430
$41888.005.020$ 293 199 $41928.105.020$ 269 174 4285300.075 313 522 $41888.104.020$ 249 197 $41928.105.020$ 294 174 $4285300.F15.002 \star$ 313 414 $41888.104.020$ 250 197 4205104.002 318 276 $4285410.002 \star$ 314 322 $41888.104.020$ 253 197 4205104.075 318 358 4285410.075 314 400 $41888.104.020$ 259 197 4216228.020 221 321 $4285410.F15.002$ 314 432 $41888.104.021$ 249 249 4216228.222 221 403 $4326A.104.020$ 226 299 $41888.104.021$ 250 249 4216228.222 222 403 $4326A.104.020$ 226 299 $41888.104.021$ 259 249 4216228.222 221 403 $4326A.104.020$ 223 299 $41888.104.021$ 259 249 4216228.222 222 403 $4326A.104.020$ 223 299 $41888.104.222$ 259 249 4216623.020 221 326 $4327A.104.020$ 224 299 $41888.104.222$ 250 249 $4225A.004.020$ 229 220 $4322A.104.020$ 223 293 $41888.104.222$ 253 249 $4225A.004.021$ 230 220 $4332001075 \star$ 311 52 $41888.104.222$ 253 249 $4225A.004.02$									457
$4188B.104.020$ 249 197 $4192B.105.020$ 294 174 $428530.F15.002 \star$ 313 441 $4188B.104.020$ 250 197 4205104.002 318 276 4285410.002 314 322 $4188B.104.020$ 253 197 4205104.075 318 358 4285410.075 314 400 $4188B.104.020$ 259 197 4216228.020 221 321 $4286A10.F15.002$ 314 322 $4188B.104.021$ 250 249 4216228.222 222 321 $4326A.104.020$ 226 299 $4188B.104.021$ 250 249 4216228.222 222 403 $4326A.104.020$ 226 299 $4188B.104.021$ 253 249 4216228.222 222 403 $4326A.104.020$ 223 293 $4188B.104.021$ 259 249 421628.222 222 403 $4326A.104.020$ 223 293 $4188B.104.222$ 249 421628.222 222 403 $4326A.104.020$ 223 293 $4188B.104.222$ 259 249 4216823.020 221 326 $4327A.104.020$ 224 293 $4188B.104.222$ 249 421628.020 229 220 $4327A.104.020$ 224 293 $4188B.104.222$ 253 249 $4225A.004.020$ 230 220 $433201075 \star$ 311 52 $4188B.104.222$ 259 249 $4225A.004.020$ 230 220 <t< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>524</td></t<>									524
$4188B.104.020$ 250 197 4205104.002 318 276 4285410.002 314 322 $4188B.104.020$ 253 197 4205104.075 318 358 4285410.075 314 400 $4188B.104.020$ 259 197 4216228.020 221 321 $4286410.F15.002$ 314 322 $4188B.104.021$ 249 249 4216228.020 222 321 $4326A.104.020$ 225 299 $4188B.104.021$ 250 249 4216228.222 221 403 $4326A.104.020$ 226 293 $4188B.104.021$ 253 249 4216228.222 222 403 $4326A.104.020$ 226 293 $4188B.104.021$ 259 249 4216228.222 222 403 $4326A.104.020$ 223 293 $4188B.104.222$ 259 249 4216228.020 221 326 $4327A.104.020$ 223 293 $4188B.104.222$ 250 249 421623.020 230 220 $433201002 \star$ 311 52 $4188B.104.222$ 250 249 $4225A.004.020$ 230 220 $43320101075 \star$ 311 52 $4188B.104.222$ 253 249 $4225A.004.020$ 230 220 $433201075 \star$ 311 52 $4188B.104.222$ 253 249 $4225A.004.021$ 230 274 $433200175 \star$ 311 52 $4188B.104.222$ 253 4225 404.020 230 <td></td> <td></td> <td></td> <td></td> <td>1</td> <td></td> <td></td> <td></td> <td>419</td>					1				419
$4188B.104.020$ 259 197 4216228.020 221 321 $4285410.F15.002$ 314 322 $4188B.104.021$ 249 249 4216228.020 222 321 $4326A.104.020$ 225 299 $4188B.104.021$ 250 249 4216228.222 221 403 $4326A.104.020$ 226 298 $4188B.104.021$ 253 249 4216228.222 222 403 $4326A.104.020$ 226 298 $4188B.104.021$ 259 249 4216823.020 221 326 $4327A.104.020$ 224 299 $4188B.104.222$ 249 249 4216823.020 222 326 $4327A.104.020$ 224 298 $4188B.104.222$ 250 249 $4225A.004.020$ 229 220 $4327A.104.222$ 223 366 $4188B.104.222$ 253 249 $4225A.004.020$ 230 220 $433201002 \star$ 311 52 $4188B.104.222$ 259 249 $4225A.004.020$ 232 220 $433200.105 \star$ 311 52 $4188B.104.222$ 259 249 $4225A.004.021$ 229 274 $433200.175 \star$ 311 52 $4188B.104.222$ 259 249 4257 $4225A.004.021$ 229 274 $433200.075 \star$ 310 65 $4188B.104.020$ 243 257 $4225A.004.021$ 230 274 $433230.0.75 \star$ 310 65 $4188B.104.020$ 248 89 42	4188B.104.020				318	276			325
$4188B.104.021$ 249 249 4216228.020 222 321 $4326A.104.020$ 225 299 $4188B.104.021$ 250 249 4216228.222 221 403 $4326A.104.020$ 226 299 $4188B.104.021$ 253 249 4216228.222 222 403 $4326A.104.222$ 225 366 $4188B.104.021$ 259 249 421628.222 222 403 $4326A.104.222$ 225 366 $4188B.104.222$ 249 249 4216823.020 221 326 $4327A.104.020$ 224 299 $4188B.104.222$ 250 249 $4225A.004.020$ 229 220 $4327A.104.222$ 223 366 $4188B.104.222$ 253 249 $4225A.004.020$ 230 220 $4332001002 \star$ 311 52 $4188B.104.222$ 253 249 $4225A.004.020$ 232 220 $433200105 \star$ 311 52 $4188B.104.222$ 259 249 $4225A.004.021$ 229 274 $433200.175 \star$ 311 52 $4188B.104.222$ 253 199 $4225A.004.021$ 230 274 $433200.075 \star$ 311 52 $4188B.104.020$ 244 257 $4225A.004.222$ 229 274 $433230.0075 \star$ 310 65 $4189D.104.020$ 244 257 $4225A.004.222$ 229 274 $433230.0175 \star$ 310 65 $4189D.104.020$ 268 89 $4225A.005.020$	4188B.104.020	253	197	4205104.075	318	358	4285410.075	314	408
$4188B.104.021$ 250 249 4216228.222 221 403 $4326A.104.020$ 226 299 $4188B.104.021$ 253 249 421628.222 222 403 $4326A.104.222$ 225 366 $4188B.104.021$ 259 249 421628.222 222 403 $4326A.104.222$ 225 326 $4188B.104.222$ 249 249 4216823.020 221 326 $4327A.104.020$ 223 299 $4188B.104.222$ 249 249 4216823.020 222 326 $4327A.104.020$ 224 299 $4188B.104.222$ 250 249 $4225A.004.020$ 229 220 $432201002 \star$ 311 52 $4188B.104.222$ 253 249 $4225A.004.020$ 230 220 $4332001002 \star$ 311 52 $4188B.104.222$ 253 249 $4225A.004.020$ 232 220 $4332001075 \star$ 311 52 $4188B.104.222$ 253 249 $4225A.004.020$ 232 220 $433200175 \star$ 311 52 $4188B.104.222$ 253 249 $4225A.004.021$ 229 274 $433200175 \star$ 311 52 $4188B.104.020$ 243 257 $4225A.004.222$ 229 274 433200.075 310 65 $4189D.104.020$ 244 257 $4225A.004.222$ 229 274 4332300.075 310 65 $4192A.004.020$ 268 89 $4225A.005.020$ 229 <									325
4188B.104.021 253 249 421628.222 222 403 4326A.104.222 225 366 4188B.104.021 259 249 4216823.020 221 326 4327A.104.020 223 229 4188B.104.222 249 249 4216823.020 222 326 4327A.104.020 224 29 4188B.104.222 250 249 4225A.004.020 229 220 4327A.104.222 223 36 4188B.104.222 253 249 4225A.004.020 230 220 4332001002* 311 52 4188B.104.222 253 249 4225A.004.020 230 220 4332001002* 311 52 4188B.104.222 259 249 4225A.004.020 232 220 4332001075* 311 52 4188B.104.020 293 199 4225A.004.021 230 274 433200.02* 310 65 4189D.104.020 243 257 4225A.004.222 230 274									290
4188B.104.0212592494216823.0202213264327A.104.0202232294188B.104.2222492494216823.0202223264327A.104.020224294188B.104.2222502494225A.004.0202292204327A.104.222223364188B.104.2222532494225A.004.0202302204332001002*311524188B.104.2222532494225A.004.0202322204332001002*311524188B.105.0202931994225A.004.021229274433200175*311524189D.104.0202432574225A.004.0212302744332300.002*310654189D.104.0202442574225A.004.2222302744332300.075310844192A.004.020268894225A.004.2222302744332300.F15.002*310654192A.004.020272894225A.005.0202292254332300.F15.005*310844192A.004.020276894225A.005.0202302254332310.002*310614192A.004.0212681114225A.005.0202302254332310.075*310614192A.004.0212681114225A.005.0202322254332310.075*31079									362
$4188B.104.222$ 249 249 4216823.020 222 326 $4327A.104.020$ 224 229 $4188B.104.222$ 250 249 $4225A.004.020$ 229 220 $4327A.104.222$ 223 366 $4188B.104.222$ 253 249 $4225A.004.020$ 230 220 $4332001002 \star$ 311 522 $4188B.104.222$ 253 249 $4225A.004.020$ 232 220 $433200102 \star$ 311 522 $4188B.105.020$ 293 199 $4225A.004.021$ 229 274 $4332001F15.002 \star$ 311 522 $4189D.104.020$ 243 257 $4225A.004.021$ 229 274 433230.075 310 652 $4189D.104.020$ 244 257 $4225A.004.222$ 229 274 433230.075 310 652 $4192A.004.020$ 268 89 $4225A.004.222$ 230 274 433230.075 310 652 $4192A.004.020$ 272 89 $4225A.005.020$ 229 225 433230.075 310 642 $4192A.004.020$ 276 89 $4225A.005.020$ 230 225 $433230.075 \star$ 310 641 $4192A.004.021$ 268 111 $4225A.005.020$ 230 225 $433230.075 \star$ 310 641 $4192A.004.021$ 268 111 $4225A.005.020$ 230 225 $433230.075 \star$ 310 641 $4192A.004.021$ 268 111 $4225A.005.020$ </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>290</td>									290
$4188B.104.222$ 253 249 $4225A.004.020$ 230 220 $4332001002 \star$ 311 522 $4188B.104.222$ 259 249 $4225A.004.020$ 232 220 $433200175 \star$ 311 67 $4188B.105.020$ 293 199 $4225A.004.021$ 229 274 $4332001F15.002 \star$ 311 52 $4188D.104.020$ 243 257 $4225A.004.021$ 229 274 $4332300.002 \star$ 310 65 $4189D.104.020$ 244 257 $4225A.004.222$ 229 274 4332300.075 310 64 $4192A.004.020$ 268 89 $4225A.004.222$ 230 274 $4332300.F15.002 \star$ 310 65 $4192A.004.020$ 272 89 $4225A.005.020$ 230 274 $4332300.F15.075 \star$ 310 64 $4192A.004.020$ 276 89 $4225A.005.020$ 230 225 $4332310.002 \star$ 310 61 $4192A.004.021$ 268 111 $4225A.005.020$ 232 225 $4332310.075 \star$ 310 61									290
4188B.104.2222592494225A.004.0202322204332001075★311674188B.105.0202931994225A.004.0212292744332001F15.002★311524189D.104.0202432574225A.004.0212302744332300.002310654189D.104.0202442574225A.004.2222292744332300.075310844192A.004.020268894225A.004.2222302744332300.F15.002★310844192A.004.020268894225A.005.0202302744332300.F15.002★310844192A.004.02027289425A.005.0202302254332300.F15.075★310844192A.004.020276894225A.005.0202302254332300.F15.075★310614192A.004.0212681114225A.005.0202322254332310.075★31079	4188B.104.222	250	249	4225A.004.020	229	220	4327A.104.222	223	362
4188B.105.020 293 199 4225A.004.021 229 274 4332001F15.002★ 311 522 4189D.104.020 243 257 4225A.004.021 230 274 4332300.002 310 655 4189D.104.020 244 257 4225A.004.222 229 274 4332300.075 310 84 4192A.004.020 268 89 4225A.004.222 230 274 4332300.F15.002★ 310 655 4192A.004.020 268 89 4225A.005.020 229 225 4332300.F15.075★ 310 84 4192A.004.020 276 89 4225A.005.020 230 225 4332310.002★ 310 65 4192A.004.021 268 111 4225A.005.020 230 225 4332310.075★ 310 61 4192A.004.021 268 111 4225A.005.020 232 225 4332310.075★ 310 79							4332001002★	311	527
4189D.104.020 243 257 4225A.004.021 230 274 4332300.002 310 655 4189D.104.020 244 257 4225A.004.222 229 274 4332300.075 310 84 4192A.004.020 268 89 4225A.004.222 230 274 4332300.F15.002★ 310 655 4192A.004.020 272 89 4225A.005.020 229 225 4332300.F15.075★ 310 84 4192A.004.020 276 89 4225A.005.020 230 225 4332310.002★ 310 61 4192A.004.020 276 89 4225A.005.020 230 225 4332310.002★ 310 61 4192A.004.021 268 111 4225A.005.020 232 225 4332310.075★ 310 79									677
4189D.104.020 244 257 4225A.004.222 229 274 4332300.75 310 84 4192A.004.020 268 89 4225A.004.222 230 274 4332300.F15.002★ 310 65 4192A.004.020 272 89 4225A.005.020 229 225 4332300.F15.075★ 310 84 4192A.004.020 276 89 4225A.005.020 230 225 4332310.002★ 310 61 4192A.004.020 268 111 4225A.005.020 230 225 4332310.075★ 310 61 4192A.004.021 268 111 4225A.005.020 232 225 4332310.075★ 310 79									527 656
4192A.004.020 268 89 4225A.004.222 230 274 4332300.F15.002★ 310 655 4192A.004.020 272 89 4225A.005.020 229 225 4332300.F15.075★ 310 84 4192A.004.020 276 89 4225A.005.020 230 225 4332310.002★ 310 61 4192A.004.021 268 111 4225A.005.020 232 225 4332310.075★ 310 79									849
4192A.004.020 272 89 4225A.005.020 229 225 4332300.F15.075★ 310 84 4192A.004.020 276 89 4225A.005.020 230 225 4332310.002★ 310 61 4192A.004.021 268 111 4225A.005.020 232 225 4332310.075★ 310 79									656
4192A.004.021 268 111 4225A.005.020 232 225 4332310.075★ 310 79					1				849
			89						617
4192A.004.021 272 111 4225A.005.020 292 225 4332310 F15 002★ 310 61									798
	4192A.004.021	272	111	4225A.005.020	292	225	4332310.F15.002★	310	617
									798 716
									860
									716
4192A.005.020 268 100 4225A.104.021 227 274 4332350.F15.075★ 310 86	4192A.005.020	268	100	4225A.104.021	227	274	4332350.F15.075★	310	860
									419
									545
									419 545
									485
									628
									485
									628
									217
4192A.104.021 267 111 4225A.154.222 292 346 4385A.104.020 219 21	-			4220A.104.222	292	340	4000A.104.020	219	217

American Standard

Product SKU	Page	List Price	Product SKU	Page	List Price	Product SKU	Page	List Pri
385A.104.021	219	272	4931410.002	306	385	5256B.65C.021	290	77
385A.104.222	219	272	4931410.075	306	441	5256B.65C.222	290	77
385A.105.020	217	222	4931888.002	305	33	5256B.65C5.020	290	360
385A.105.020	219	222	4931888.075	305	40	5256B.65C5.021	290	385
385A.114.020	216	217	4932300.002	312	474	5256B.65C5.222	290	385
385A.114.020	218	217	4932300.075	312	606	5257A.65C.020	289	58
385A.115.020	216	222	4932350.002	312	606	5257A.65C.021	289	68
385A.115.020	218	222	4932350.075	312	744	5257A.65C.222	289	68
433001.002	316	276	4932410.002	312	413	5257A.65C5.020	289	290
433001.075	316	358	4932410.075	312	496	5257A.65C5.021	289	340
4433001.224★	316	376	5020A.65G.020	208	112	5257A.65C5.222	289	340
4433001.F15.002★	316	276	5020A.65G.020	220	112	5257A.65D.020	289	43
4433001.F15.075★	316	349	5020A.65G.020	221	112	5257A.65D.021	289	52
	316	376	5020A.65G.020	222	112	5257A.65D.222	289	52
4433001.F15.224★								
4433100.002	324	303	5020A.65G.020	223	112	5257A.65D5.020	289	215
4433100.075	324	385	5020A.65G.020	224	112	5257A.65D5.021	289	260
4433100.F15.002★	315	303	5020A.65G.020	225	112	5257A.65D5.222	289	260
4433100.F15.075★	315	376	5020A.65G.020	226	112	5257A.65MT.020	214	51
4433100.F15.224★	315	398	5020A.65G.020	284	112	5257A.65MT.020	235	51
4433300.002	315	331	5020A.65G.222	208	138	5257A.65MT.020	236	51
4433300.075★	315	419	5020A.65G.222	220	138	5257A.65MT.020	237	51
4433300.F15.002	315	331	5020A.65G.222	221	138	5257A.65MT.020	239	51
4433300.F15.075★	315	409	5020A.65G.222	222	138	5257A.65MT.020	240	51
4433300.F15.224★	315	430	5020A.65G.222	223	138	5257A.65MT.020	243	51
4433350.002	315	562	5020A.65G.222	224	138	5257A.65MT.020	245	51
4433350.075	315	678	5020A.65G.222	225	138	5257A.65MT.020	247	51
4433350.F15.002	315	562	5020A.65G.222	284	138	5257A.65MT.020	249	51
4433350.F15.075	315	678	5020B.65G.020	284	102	5257A.65MT.020	251	51
4433410.002	316	276	5020B.65G.222	284	128	5257A.65MT.020	253	51
4433410.075★	316	341	5023.100.020	279	597	5257A.65MT.020	254	51
4433410.F15.002★	316	276	5023.100.021	279	746	5257A.65MT.020	255	51
4433410.F15.075★	316	333	5023.100.222	279	746	5257A.65MT.020	256	51
4433410.F15.224★	316	355	5023.111.020	279	248	5257A.65MT.020	257	51
4503120.002	308	99	5023.111.021	279	310	5257A.65MT.020	258	51
4503120.002	327	99	5024A.65G.020	209	112	5257A.65MT.020	259	51
4503120.013	327	121	5024A.65G.020	241	112	5257A.65MT.020	260	51
4503120.075	327	121	5024A.65G.020	242	112	5257A.65MT.020	261	51
4503120.224★	327	129	5024A.65G.020	285	112	5257A.65MT.020	263	51
4503120.278	327	132	5024A.65G.222	209	138	5257A.65MT.020	265	51
4519A.104.020	263	100	5024A.65G.222	285	138	5257A.65MT.020	267	51
4519A.104.020	264	100	5024B.65G.020	242	102	5257A.65MT.020	268	51
4519A.105.020	263	105	5024B.65G.020	285	102	5257A.65MT.020	269	51
4519A.105.020	264	105	5024B.65G.222	285	128	5257A.65MT.020	270	51
4519A200.020	261	163	5025A.65G.020	206	112	5257A.65MT.020	271	51
4519A200.020	262	163	5025A.65G.020	207	112	5257A.65MT.020	272	51
4519B104.020	265	160	5025A.65G.020	233	112	5257A.65MT.020	272	51
4519B104.020	266	160	5025A.65G.020	234	112	5257A.65MT.020	274	51
4803100.002	307	320	5025A.65G.020	284	112	5257A.65MT.020	288	51
4803100.075	307	395	5025A.65G.222	284	138	5257A.65MT.021	236	56
4803100.243	307	410	5025B.65G.020	233	102	5257A.65MT.021	237	56
4803300.002	307	385	5025B.65G.020	234	102	5257A.65MT.021	239	56
4803300.075	307	485	5025B.65G.020	284	102	5257A.65MT.021	240	56
4803300.243	307	500	5025B.65G.222	284	128	5257A.65MT.021	245	56
4803350.002	307	513	5055A.65C.020	205	92	5257A.65MT.021	247	56
4803350.075	307	615	5055A.65C.020	215	92	5257A.65MT.021	249	56
4803350.243	307	650	5055A.65C.020	218	92	5257A.65MT.021	251	56
4803410.002	308	350	5055A.65C.020	210	92	5257A.65MT.021	253	56
4803410.075	308	450	5055A.65C.020	287	92	5257A.65MT.021	254	56
4803410.243	308	480	5055A.65C.021	219	102	5257A.65MT.021	255	56
4803900.002	308	589	5055A.65C.021	287	102	5257A.65MT.021	256	56
4803900.075	308	725	5055A.65C.222	205	102	5257A.65MT.021	257	56
4803900.243	308	815	5055A.65C.222	219	102	5257A.65MT.021	258	56
4834ST.020	154	805	5055A.65C.222	287	102	5257A.65MT.021	259	56
4836SMCOL.218	148	944	5055A.65PT.020	287	77	5257A.65MT.021	260	56
4901300.002	304	441	5055A.65PT.021	287	82	5257A.65MT.021	263	56
4901300.075	304	524	5055A.65PT.222	287	82	5257A.65MT.021	267	56
4901380.002	304	633	5055B.65PT.020	287	71	5257A.65MT.021	268	56
4901380.075	304	772	5055B.65PT.021	287	77	5257A.65MT.021	269	56
4901410.002	304	385	5055B.65PT.222	287	77	5257A.65MT.021	270	56
4901410.075	304	441	5256A.65C.020	290	80	5257A.65MT.021	271	56
4931300.002	306	441	5256A.65C.021	290	85	5257A.65MT.021	272	56
4931300.075	306	524	5256A.65C.222	290	85	5257A.65MT.021	273	56
4931360.002	305	661	5256A.65C5.020	290	400	5257A.65MT.021	274	56
4931360.075	305	826	5256A.65C5.021	290	425	5257A.65MT.021	288	56
	0.00	020					200	00
4931380.002	305	633	5256A.65C5.222	290	425	5257A.65MT.222	236	56

American Standard

Fixtures and Faucets

Index

Product SKU	Page	List Price	Product SKU	Page	List Price	Product SKU	Page	List Price
5257A.65MT.222	240	56	5259B.65MT.222	250	51	5359B.051T5.222*	290	385
5257A.65MT.222	243	56	5259B.65MT.222	252	51	5900A05GT.020	281	128
5257A.65MT.222	245	56	5259B.65MT.222	257	51	6030SMLHOL.218	147	985
5257A.65MT.222 5257A.65MT.222	247 249	56 56	5259B.65MT.222 5259B.65MT.222	258 259	51 51	6030SMRHOL.218 6032SMLHOL.218	147 147	985 995
5257A.65MT.222	251	56	5259B.65MT.222	260	51	6032SMRHOL.218	147	995
5257A.65MT.222	253	56	5259B.65MT.222	264	51	6034ST.020	154	1,009
5257A.65MT.222	254	56	5259B.65MT.222	275	51	6036SMLHOL.218	147	1,106
5257A.65MT.222	255	56	5259B.65MT.222	276	51	6036SMRHOL.218	147	1,106
5257A.65MT.222	256	56	5259B.65MT.222	277	51 51	6060VC.020	102	2,604
5257A.65MT.222 5257A.65MT.222	257 258	56 56	5259B.65MT.222 5311.012.020	288 267	42	6434AMFCOL.218 7018018.002	149 386	1,303 60
5257A.65MT.222	259	56	5311.012.020	268	42	7018018.002	510	60
5257A.65MT.222	260	56	5311.012.020	269	42	7018018.278	386	91
5257A.65MT.222	263	56	5311.012.020	270	42	7018018.278	510	91
5257A.65MT.222	267	56	5311.012.020	271	42	7018018.295	386	85
5257A.65MT.222	268	56	5311.012.020	272	42	7018018.295	510	85
5257A.65MT.222 5257A.65MT.222	269 270	56 56	5311.012.020 5311.012.020	273 274	42 42	7018024.002 7018024.002	386 510	67 67
5257A.65MT.222	270	56	5311.012.020	287	42	7018024.278	396	99
5257A.65MT.222	272	56	5320B.65CT.020	223	67	7018024.278	520	99
5257A.65MT.222	273	56	5320B.65CT.020	225	67	7018024.295	386	92
5257A.65MT.222	274	56	5320B.65CT.020	228	67	7018024.295	510	92
5257A.65MT.222	288	56	5320B.65CT.020	230	67	7018101.002	382	248
5259B.65C.020 5259B.65C.020	278 289	51 51	5320B.65CT.020 5320B.65CT.021	286 228	67 79	7018101.278 7018101.295	382 382	372 347
5259B.65C.020	289	59	5320B.65CT.021	228	79	7018101.295 7018101P.002	382	40
5259B.65C.021	289	59	5320B.65CT.222	223	79	7018101P.278	382	59
5259B.65C.222	278	59	5320B.65CT.222	225	79	7018101P.295	382	55
5259B.65C.222	289	59	5320B.65CT.222	228	79	7018190.002	386	44
5259B.65C5.020*	289	255	5320B.65CT.222	230	79	7018190.002	510	44
5259B.65C5.021*	289	295	5321A.65CT.020	210	80	7018190.278	386	67
5259B.65C5.222★ 5259B.65D.020★	289 289	295 42	5321A.65CT.020 5321A.65CT.020	211 223	80 80	7018190.278 7018190.295	510 386	67 62
5259B.65D.021★	289	48	5321A.65CT.020	224	80	7018190.295	510	62
5259B.65D.222★	289	48	5321A.65CT.020	225	80	7018201.002	382	220
5259B.65D5.020*	289	210	5321A.65CT.020	226	80	7018201.278	382	331
5259B.65D5.021*	289	240	5321A.65CT.020	227	80	7018201.295	382	309
5259B.65D5.222*	289	240	5321A.65CT.020	229	80	7018210.002	386	33
5259B.65MT.020 5259B.65MT.020	238 240	46 46	5321A.65CT.020 5321A.65CT.020	231 232	80 80	7018210.002 7018210.278	510 386	33 49
5259B.65MT.020	240	40	5321A.65CT.020	286	80	7018210.278	510	49
5259B.65MT.020	246	46	5321A.65CT.021	210	89	7018210.295	386	46
5259B.65MT.020	248	46	5321A.65CT.021	225	89	7018210.295	510	46
5259B.65MT.020	250	46	5321A.65CT.021	227	89	7018230.002	386	49
5259B.65MT.020	252	46	5321A.65CT.021	229	89	7018230.002	510	49
5259B.65MT.020 5259B.65MT.020	257 258	46 46	5321A.65CT.021 5321A.65CT.222	286 210	89 89	7018230.278 7018230.278	386 510	75 75
5259B.65MT.020	258	46	5321A.65CT.222	210	89	7018230.278	386	75
5259B.65MT.020	260	46	5321A.65CT.222	225	89	7018230.295	510	70
5259B.65MT.020	262	46	5321A.65CT.222	227	89	7018801.002	382	331
5259B.65MT.020	264	46	5321A.65CT.222	229	89	7018801.278	382	496
5259B.65MT.020	266	46	5321A.65CT.222	286	89	7018801.295	382	463
5259B.65MT.020	275	46	5345.110.020	286	66	7052018.002	378	67
5259B.65MT.020 5259B.65MT.020	276 277	46 46	5345.110.021 5345.110.222	286 286	75 75	7052018.002 7052018.013	512 378	67 93
5259B.65MT.020	288	46	5350.110.020	213	69	7052018.013	512	93
5259B.65MT.021	238	51	5350.110.020	220	69	7052018.278	378	100
5259B.65MT.021	240	51	5350.110.020	286	69	7052018.278	512	100
5259B.65MT.021	246	51	5350.110.021	213	79	7052018.295	378	93
5259B.65MT.021	248	51	5350.110.021	286	79	7052018.295	512	93
5259B.65MT.021	250 252	51 51	5350.110.222	213 220	79 79	7052024.002	378 512	72 72
5259B.65MT.021 5259B.65MT.021	252	51	5350.110.222 5350.110.222	220	79 79	7052024.002 7052024.013	378	100
5259B.65MT.021	258	51	5359A.051T.020	212	80	7052024.013	512	100
5259B.65MT.021	259	51	5359A.051T.020*	290	80	7052024.278	378	108
5259B.65MT.021	260	51	5359A.051T.021*	290	85	7052024.278	512	108
5259B.65MT.021	264	51	5359A.051T.222*	290	85	7052024.295	378	100
5259B.65MT.021	278	51	5359A.051T5.020*	290	380	7052024.295	512	100
5259B.65MT.021 5259B.65MT.021	276	51 51	5359A.051T5.021★ 5359A.051T5.222★	290 290	405 405	7052107.002 7052107.013	370 370	256 359
5259B.65MT.021	277		000000.00110.222 8	200	400		010	000
	277 288		5359B.051T.020	290	72	7052107.278	370	384
5259B.65MT.222	277 288 238	51 51	5359B.051T.020 5359B.051T.021	290 290	72 77	7052107.278 7052107.295	370 370	384 359
5259B.65MT.222 5259B.65MT.222	288	51						
	288 238	51 51	5359B.051T.021	290	77	7052107.295	370	359

American Standard

Product SKU	Page	List Price	Product SKU	Page	List Price	Product SKU	Page	List Price
7052121.278	371	439	7075050.002	354	159	7105801.295	458	617
7052121.295	371	409	7075054.002	354	141	7105821.002	458	441
7052124.002	371	272	7075055.002	354	141	7105821.243	458	661
052190.002	378	41	7075056.002	354	152	7105821.295	458	617
052190.002	512	41	7075100.002	352	187	7105857.002	458	441
7052190.013	378	57	7075100.278	352	280	7105857.243	458	661
7052190.013	512	57	7075100.295	352	261	7105857.295	458	617
7052190.278	378	62	7075102.002	352	177	71058777.002	458	441
7052190.278	512	62	7075102.278	352	267	7105877.243	458	661
052190.295	378	57	7075102.295	352	248	7105877.295	458	617
7052190.295	512	57	7075104.002	352	168	7106101.002	400	324
7052207.002	371	231	7075104.278	352	253	7106101.013	400	454
7052207.013	371	323	7075104.295★	352	236	7106101.278	400	486
7052207.278	371	346	7075200.002	355	128	7106101.295	400	454
7052207.295	371	323	7075200.278	355	192	7106152.002	400	399
7052210.002	378	31	7075200.295	355	178	7106152.013	400	559
052210.002	512	31	7075202.002	355	119	7106152.278	400	599
7052210.013	378	43	7075202.278	355	178	7106152.295	400	559
7052210.013	512	43	7075202.295	355	166	7106801.002	400	369
052210.278	378	46	7075205.002	355	111	7106801.013	400	517
052210.278	512	46	7075205.278	355	165	7106801.278	400	555
052210.295	378	43	7075205.295	355	155	7106801.295	400	517
052210.295	512	43	7075206.002	355	108	714AA.154.020	215	632
052214.002	371	210	7075206.278	355	161	7184101M1.002★	470	243
052230.002	378	56	7075206.295	355	151	7184101.002	470	267
052230.002	512	56	7075800.002	352	291	7184101.295	470	373
052230.013	378	79	7075800.278	352	437	7184101P.002	470	43
052230.013	512	79	7075800.295	352	408	7184101P.295	470	60
052230.278	378	85	7075802.002	352	282	7184801.002	470	447
052230.278	512	85	7075802.278	352	423	7184801.295	470	626
052230.295	378	79	7075802.295	352	395	7184851.002	470	447
052230.295	512	79	7075F05200.002	355	119	7184851.295	470	626
052807.002	370	338	7105018.002	467	57	7186101.002	390	227
052807.013	370	474	7105018.002	508	57	7186101.278	390	340
052807.278	370	507	7105018.243	467	88	7186101.295	390	318
052807.295	370	474	7105018.243	508	88	7186201.002	390	195
052807.295	370	303	7105018.295	467	80	7186201.278	390	293
052814.002	370	338		508	80		390	293
			7105018.295			7186201.295		
052827.013	370	474	7105024.002	467	60	7186203.002★	391	167
052827.278	370	507	7105024.002	508	60	7186203.295★	391	235
7052827.295	370	474	7105024.243	467	94	7186211.002★	391	201
074000.002	319	137	7105024.243	508	94	7186211.278★	391	301
7074000.075	319	164	7105024.295	467	85	7186211.295★	391	281
7074010.002	319	137	7105024.295	508	85	7186801.002	390	308
7074020.002★	319	164	7105101.002	459	306	7186801.278	390	461
074030.002	319	164	7105101.243	459	458	7186801.295	390	431
074030.075★	319	197	7105.101.295	459	428	7186811.002	390	313
074040.002	319	164	7105152.002	459	368	7186811.278	390	469
074040.075	319	197	7105152.243	459	551	7186811.295	390	439
074100.002	320	248	7105152.295	459	516	7236.068C.020	100	2,808
074100.075	320	297	7105190.002	467	36	7236V.002.011	100	1,100
074140.002	321	111	7105190.002	508	36	7236V.002.020	100	1,100
074240.002	321	111	7105190.243	467	55	7236V.002.222	100	1,153
074300.002	320	303	7105190.243	508	55	7236V.418C.020	100	4,340
074300.075	320	364	7105190.295	467	50	7236VC.020	100	2,071
074400.002	321	111	7105190.295	508	50	7293252.002	317	413
074400.075	321	132	7105210.002	467	27	7293252.F15.002★	317	403
074500.002	320	132	7105210.002	508	27	7295252.002	317	424
074501.002	320	159	7105210.243	467	41	7295252.F15.002★	317	424
074550.002	320	159	7105210.243	508	41	7298252.002	317	385
074551.002	321	187	7105210.295	467	38	7298252.F15.002★	317	385
075000.002	353	153	7105210.295	508	38	7301531-100.0070A	163	5
075000.278	353	231	7105224.002	467	121	7301839-201.0020A	8	55
075000.295	353	215	7105224.002	508	121	7301839-201.0020A	9	55
075002.002	353	145	7105224.243	467	182	7301839-201.0020A	10	55
075002.002	353	217	7105224.243	508	182	7301839-201.0020A 7301839-201.0020A	10	55
075002.278				467		7301839-201.0020A		55
	353	202	7105224.295		170		24	
075004.002	354	135	7105224.295	508	170	7301839-201.0020A	25	55
075004.278★	354	204	7105230.002	467	46	7302282-401.0750A	29	60
075004.295	354	190	7105230.002	508	46	7302285-401.0750A	31	101
075005.002	353	135	7105230.243	467	72	7302286-401.0750A	28	78
075005.278	353	204	7105230.243	508	72	7302287-401.0750A	33	83
075005.295	353	190	7105230.295	467	65	7302287-401.0750A	34	83
7075006.002	353	147	7105230.295	508	65	7302288-401.0750A	30	50
7075006.278★	353	220	7105801.002	458	441	7302289-401.0750A	37	63
010000.210 A								

American Standard

Fixtures and Faucets

Product SKU	Page	List Price	Product SKU	Page	List Price	Product SKU	Page	List Price
7302290-401.0750A	39	135	735172-400.222	257	88	735213-400.020	265	56
7302290-401.0750A	40	135	735172-400.222	258	88	735213-400.020	266	56
7302298-401.0750A	32	101	735173-400.020	249	80	735214-400.020	263	59
7302361-401.0750A	27	123	735173-400.020	250	80	735214-400.020	264	59
7302389-401.0750A	10	128	735173-400.020	251	80	735215-400.020	261	58
7302390-401.0750A	9	128	735173-400.020	252	80	735215-400.020	262	58
7302391-401.0750A	8	125	735173-400.020	253	80	735216-400.020	216	100
7302392-401.0750A	11	128	735173-400.020	255	80	735216-400.020	217	100
731100-400.020	175	70	735173-400.020	259	80	735216-400.020	218	100
731150-400.020	178	79	735173-400.020	260	80	735216-400.020	219	100
731150-400.020	179	79	735173-400.021	249	92	735216-400.021	219	123
734906-401.020	172	155	735173-400.021	250	92	735216-400.222	219	123
734906-401.222	172	196	735173-400.021	251	92	735219-400.020	221	103
735105-400.020	210	69	735173-400.021	252	92	735219-400.020	222	103
735105-400.020	211 210	69	735173-400.021	253 255	92 92	735219-400.222	221 222	126 126
735105-400.021	210	89	735173-400.021	255	92	735219-400.222		126
735105-400.222 735125-400.020	210	89 113	735173-400.021 735173-400.021	259	92	735226-400.020 735226-400.222	208 208	103
735125-400.020	213	141	735173-400.222	249	92	735228-400.020	208	62
735125-400.222	213	141	735173-400.222	249	92	7353018.002	502	67
735138-400.020	213	57	735173-400.222	250	92	7353018.002	502	67
735138-400.020	230	57	735173-400.222	252	92	7353018.013	502	92
735138-400.020	237	57	735173-400.222	252	92	7353018.013	511	92
735138-400.020	236	71	735173-400.222	255	92	7353018.278	502	92
735138-400.021	230	71	735173-400.222	255	92	7353018.278	502	99
735138-400.021	238	71	735173-400.222	260	92	7353018.295	502	92
735138-400.222	236	71	735177-400.020	235	67	7353018.295	511	92
735138-400.222	237	71	735177-400.020	239	67	7353024.002	502	71
735138-400.222	238	71	735177-400.020	240	67	7353024.002	511	71
735143-400.020	243	87	735182-400.020	212	104	7353024.013	502	99
735143-400.020	244	87	735189-400.020	267	59	7353024.013	511	99
735147-400.020	209	105	735189-400.020	268	59	7353024.278	502	106
735147-400.222	209	131	735189-400.020	271	59	7353024.278	511	106
735148-400.020	207	105	735189-400.020	272	59	7353024.295	502	99
735148-400.222	207	131	735189-400.020	275	59	7353024.295	511	99
735154-400.020	241	67	735189-400.020	276	59	7353101.002	494	287
735154-400.020	242	67	735189-400.021	267	74	7353101.013	494	401
735158-400.020	233	64	735189-400.021	268	74	7353101.278	494	429
735168-400.020	234	66	735189-400.021	271	74	7353101.295	494	401
735169-400.020	206	102	735189-400.021	272	74	7353101P.002	494	40
735171-400.020	227	73	735189-400.021	275	74	7353101P.013	494	55
735171-400.020	228	73	735189-400.021	276	74	7353101P.278	494	59
735171-400.020	229	73	735189-400.222	267	74	7353101P.295	494	55
735171-400.020	230	73	735189-400.222	268	74	7353190.002	502	44
735171-400.020	231	73	735189-400.222	271	74	7353190.002	511	44
735171-400.020	232	73	735189-400.222	272	74	7353190.013	502	62
735171-400.021	227	93	735189-400.222	275	74	7353190.013	511	62
735171-400.021	228	93	735189-400.222	276	74	7353190.278	502	67
735171-400.021	229	93	735190-400.020	269	62	7353190.278	511	67
735171-400.021	230	93	735190-400.020	270	62	7353190.295	502	62
735171-400.222	227	93	735190-400.020	273	62	7353190.295	511	62
735171-400.222	228	93	735190-400.020	274	62	7353210.002	502	31
735171-400.222	229	93	735190-400.020	277	62	7353210.002	511	31
735171-400.222	230	93	735190-400.020	278	62	7353210.013	502	43
735172-400.020	245	70	735190-400.021	269	79	7353210.013	511	43
735172-400.020	246	70	735190-400.021	270	79	7353210.278	502	46
735172-400.020	247	70	735190-400.021	273	79	7353210.278	511	46
735172-400.020	248	70	735190-400.021	274	79	7353210.295	502	43
735172-400.020	254	70	735190-400.021	277	79	7353210.295	51	43
735172-400.020	256	70	735190-400.021	278	79	7353224.002	502	132
735172-400.020	257	70	735190-400.222	269	79	7353224.002	511	132
735172-400.020	258	70	735190-400.222	270	79	7353224.013	502	186
735172-400.021 735172-400.021	245	88	735190-400.222 735190-400.222	273	79	7353224.013	511	186 199
	246	88		274	79	7353224.278	502	199
735172-400.021 735172-400.021	247 248	88 88	735190-400.222 735190-400.222	277 278	79 79	7353224.278 7353224.295	511 502	199
735172-400.021 735172-400.021	248	88	735190-400.222	278	93	7353224.295	502	186
735172-400.021 735172-400.021	254	88	735201-400.020	225	93	7353224.295 7353230.002	511	53
735172-400.021	256	88	735201-400.020	226	93	7353230.002	502	53
735172-400.021	257	88	735201-400.222	225	93	7353230.002	502	74
735172-400.021 735172-400.222	258	88	735202-400.020	223	93	7353230.013	502	74
735172-400.222	245	88	735202-400.020	224	93 114	7353230.013	502	74
735172-400.222	246	88	735202-400.222	223	114	7353230.278		79
735172-400.222	247	88	735203-410.020 735203-410.222	220	100	7353230.278	511 502	79
	270	00	. 30200 - 10.222	220	120	. 300200.200		
735172-400.222	254	88	735212-400.020	205	100	7353230.295	511	74

American Standard

★ DISCONTINUED. Available while supplies last.

Product SKU	Page	List Price	Product SKU	Page	List Price	Product SKU	Page	List Price
7353801.013	494	547	7381097-2950A	209	77	7381231-200.0200A	260	38
7353801.278	494	587	7381105-0020A	208	37	7381231-200.0200A	291	38
7353801.295	494	547	7381105-0020A	221	37	7381231-200.0990A	245	38
7353841.002	494	392	7381105-0020A	222	37	7381231-200.0990A	246	38
7353841.013	494	547	7381105-0130A	208	50	7381231-200.0990A	247	38
7353841.278	494	587	7381105-0130A	221	50	7381231-200.0990A	248	38
7353841.295	494	547	7381105-0130A	222	50	7381231-200.0990A	249	38
7381020.0020A	208	37	7381105-2240A	208	95	7381231-200.0990A	250	38
7381020.0020A	221	37	7381105-2240A	221	95	7381231-200.0990A	251	38
7381020.0020A	222	37	7381105-2240A	222	95	7381231-200.0990A	252	38
7381004-0020A	267	21	7381105-2780A	208	62	7381231-200.0990A	253	38
7381004-0020A	268	21	7381105-2780A	221	62	7381231-200.0990A	254	38
7381004-0020A 7381004-0020A	269 270	21 21	7381105-2780A 7381105-2950A	222 208	62 54	7381231-200.0990A 7381231-200.0990A	255 256	38 38
7381004-0020A 7381004-0020A	270	21	7381105-2950A 7381105-2950A	208	54	7381231-200.0990A 7381231-200.0990A	250	38
7381004-0020A 7381004-0020A	271	21	7381105-2950A 7381105-2950A	221	54	7381231-200.0990A	258	38
7381004-0020A 7381004-0020A	272	21	7381192-0020A	239	30	7381231-200.0990A	259	38
7381004-0020A 7381004-0020A	273	21	7381192-0020A 7381192-0020A	239	30	7381231-200.0990A	259	38
7381004-0020A	274	21	7381192-0200A	239	30	7381231-200.0990A	200	38
7381004-0020A	275	21	7381192-0200A 7381192-0200A	239	30	7381231-200.2240A	245	58
7381004-0020A	277	21	7381203-200.0020A	206	13	7381231-200.2240A	246	58
7381004-0020A	278	21	7381203-200.0020A	200	13	7381231-200.2240A	240	58
7381004-0020A	291	21	7381203-200.2430A	206	115	7381231-200.2240A	248	58
7381004-0200A	267	21	7381203-200.2430A	200	115	7381231-200.2240A	240	58
7381004-0200A	268	21	7381203-200.2950A	206	95	7381231-200.2240A	243	58
7381004-0200A	269	21	7381203-200.2950A	200	95	7381231-200.2240A	251	58
7381004-0200A	270	21	7381203-201-0070A	234	13	7381231-200.2240A	252	58
7381004-0200A	271	21	7381231-200.0020A	245	32	7381231-200.2240A	253	58
7381004-0200A	272	21	7381231-200.0020A	246	32	7381231-200.2240A	254	58
7381004-0200A	273	21	7381231-200.0020A	247	32	7381231-200.2240A	255	58
7381004-0200A	274	21	7381231-200.0020A	248	32	7381231-200.2240A	256	58
7381004-0200A	275	21	7381231-200.0020A	249	32	7381231-200.2240A	257	58
7381004-0200A	276	21	7381231-200.0020A	250	32	7381231-200.2240A	258	58
7381004-0200A	277	21	7381231-200.0020A	251	32	7381231-200.2240A	259	58
7381004-0200A	278	21	7381231-200.0020A	252	32	7381231-200.2240A	260	58
7381004-0200A	291	21	7381231-200.0020A	253	32	7381231-200.2240A	291	58
7381004-0210A	267	26	7381231-200.0020A	254	32	7381231-200.2780A	245	94
7381004-0210A	268	26	7381231-200.0020A	255	32	7381231-200.2780A	246	94
7381004-0210A	269	26	7381231-200.0020A	256	32	7381231-200.2780A	247	94
7381004-0210A	270	26	7381231-200.0020A	257	32	7381231-200.2780A	248	94
7381004-0210A	271	26	7381231-200.0020A	258	32	7381231-200.2780A	249	94
7381004-0210A	272	26	7381231-200.0020A	259	32	7381231-200.2780A	250	94
7381004-0210A	273	26	7381231-200.0020A	260	32	7381231-200.2780A	251	94
7381004-0210A	274	26	7381231-200.0020A	291	32	7381231-200.2780A	252	94
7381004-0210A	275	26	7381231-200.0130A	245	39	7381231-200.2780A	253	94
7381004-0210A	276	26	7381231-200.0130A	246	39	7381231-200.2780A	254	94
7381004-0210A	277	26	7381231-200.0130A	247	39	7381231-200.2780A	255	94
7381004-0210A	278	26	7381231-200.0130A	248	39	7381231-200.2780A	256	94
7381004-0210A	291	26	7381231-200.0130A	249	39	7381231-200.2780A	257	94
7381004-2220A	267	26	7381231-200.0130A	250	39	7381231-200.2780A	258	94
7381004-2220A	268	26	7381231-200.0130A	251	39	7381231-200.2780A	259	94
7381004-2220A	269	26	7381231-200.0130A	252	39	7381231-200.2780A	260	94
7381004-2220A	270	26	7381231-200.0130A	253	39	7381231-200.2780A	291	94
7381004-2220A	271	26	7381231-200.0130A	254	39	7381231-200.2950A	245	46
7381004-2220A	272	26	7381231-200.0130A	255	39	7381231-200.2950A	246	46
7381004-2220A	273	26	7381231-200.0130A	256	39	7381231-200.2950A	247	46
7381004-2220A	274	26	7381231-200.0130A	257	39	7381231-200.2950A	248	46
7381004-2220A	275	26	7381231-200.0130A	258	39	7381231-200.2950A	249	46
7381004-2220A	276	26	7381231-200.0130A	259	39	7381231-200.2950A	250	46
7381004-2220A	277	26	7381231-200.0130A	260	39	7381231-200.2950A	251	46
7381004-2220A	278	26	7381231-200.0130A	291	39	7381231-200.2950A	252	46
7381004-2220A	291	26	7381231-200.0200A	245	38	7381231-200.2950A	253	46
7381064-0020A	207	41	7381231-200.0200A	246	38	7381231-200.2950A	254	46
7381064-0020A	291	41	7381231-200.0200A	247	38	7381231-200.2950A	255	46
7381064-2240A	207	99	7381231-200.0200A	248	38	7381231-200.2950A	256	46
7381064-2240A	291	99	7381231-200.0200A	249	38	7381231-200.2950A	257	46
7381064-2430A	207	72	7381231-200.0200A	250	38	7381231-200.2950A	258	46
7381064-2430A	291	72	7381231-200.0200A	251	38	7381231-200.2950A	259	46
7381064-2950A	207	58	7381231-200.0200A	252	38	7381231-200.2950A	260	46
7381064-2950A	291	58	7381231-200.0200A	253	38	7381231-200.2950A	291	46
7381092-201.0020A	236	6	7381231-200.0200A	254	38	7381231-201.0020A	245	32
7381092-201.0020A	237	6	7381231-200.0200A	255	38	7381231-201.0020A	246	32
7001000 001 00004	238	6	7381231-200.0200A	256	38	7381231-201.0020A	247	32
7381092-201.0020A								
7381092-202.0020A 7381092-202.0020A	261	6	7381231-200.0200A	257	38	7381231-201.0020A	248	32

American Standard

Product SKU	Page	List Price	Product SKU	Page	List Price	Product SKU	Page	List Price
7381231-201.2950A	247	46	7381406-200.0020A	224	39	7381847-200.2950A	207	77
7381231-201.2950A	248	46	7381406-200.0020A	225	39	7381847-200.2950A	209	77
7381232-200.0020A	227	35	7381406-200.0020A	226	39	7381910-200.0020A	235	25
7381232-200.0020A	228	35	7381406-200.2240A	223	81	7381910-201.0020A	235	25
7381232-200.0020A	229	35	7381406-200.2240A	224	81	P030398068C.002	214	19
7381232-200.0020A	230	35	7381406-200.2240A	225	81	7385000.002	434	174
7381232-200.0020A	231	35	7381406-200.2240A	226	81	7385000.295	434	244
7381232-200.0020A	232	35	7381406-200.2950A	223	58	7385003.002	434	174
7381232-200.0020A	291	35	7381406-200.2950A	224	58	7385004.002	435	157
7381232-200.0130A	227	39	7381406-200.2950A	225	58	7385004.295	435	219
7381232-200.0130A	228	39	7381406-200.2950A	226	58	7385007.002	435	157
7381232-200.0130A	229	39	7381459-200.0020A	220	64	7385008.002	4434	179
7381232-200.0130A 7381232-200.0130A	230 231	39 39	7381459-200.0130A 7381459-200.2240A	220 220	69 103	7385008.295★ 7385045.002	434 436	251 209
7381232-200.0130A	231	39	7381459-200.2780A	220	96	7385045.002	436	190
7381232-200.0130A	291	39	7381459-200.2950A	220	79	7385050.002	436	160
7381232-200.0200A	227	44	7381556-400.0200A	215	64	7385053.002	435	177
7381232-200.0200A	228	44	7381556-400.2950A	215	90	7385058.002	435	177
7381232-200.0200A	229	44	7381683-401.0070A	233	156	7385LH000.002	434	179
7381232-200.0200A	230	44	738171-0020A	267	21	7385LHV05003.002	434	174
7381232-200.0200A	231	44	738171-0020A	268	21	7385LS000.002	4434	174
7381232-200.0200A	232	44	738171-0020A	269	21	738520-0070A	174	25
7381232-200.0200A	291	44	738171-0020A	271	21	738520-0070A	194	25
7381232-200.0210A	227	55	738171-0020A	272	21	738772-0020A	210	24
7381232-200.0210A	228	55	738171-0020A	273	21	738772-0020A	211	24
7381232-200.0210A	229	55	738171-0020A	275	21	738772-0200A	210	39
7381232-200.0210A	230	55	738171-0020A	276	21	738772-0200A	211	39
7381232-200.0210A	291	55	738171-0020A	277	21	738772-0990A	210	38
7381232-200.2220A	227	55	738171-0200A	267	21	738772-0990A	211	38
7381232-200.2220A	228	55	738171-0200A	268	21	738772-2950A	210	39
7381232-200.2220A	229	55	738171-0200A	269	21	738772-2950A	211	39
7381232-200.2220A	230	55	738171-0200A	271	21	738903-0020A	213	21
7381232-200.2220A	291	55	738171-0200A	272	21	738903-0020A	241	21
7381232-200.2240A	227	90	738171-0200A	273	21	738903-0020A	242	21
7381232-200.2240A	228	90	738171-0200A	275	21	738903-0020A	291	21
7381232-200.2240A	229	90	738171-0200A	276	21	738903-0200A	213	34
7381232-200.2240A	230 231	90 90	738171-0200A	277 205	21 68	738903-0200A	241 242	34 34
7381232-200.2240A 7381232-200.2240A	231	90	7381735-200.0020A 7381735-200.0130A	205	64	738903-0200A 738903-0200A	242	34
7381232-200.2240A 7381232-200.2240A	232	90	7381735-200.0130A	205	91	738903-0200A 738903-2220A	291	40
7381232-200.2780A	291	67	7381735-200.2950A	205	73	738903-2220A	241	40
7381232-200.2780A	228	67	7381740-200.0020A	216	62	738903-2220A	242	40
7381232-200.2780A	229	67	7381740-200.0200A	217	62	738903-2220A	291	40
7381232-200.2780A	230	67	7381740-200.0200A	218	62	738903-2430A	213	87
7381232-200.2780A	231	67	7381740-200.0200A	219	62	738903-2430A	241	87
7381232-200.2780A	232	67	7381740-200.0130A	216	68	738903-2430A	242	87
7381232-200.2780A	291	67	7381740-200.0130A	217	68	738903-2430A	291	87
7381232-200.2950A	227	47	7381740-200.0130A	218	68	738903-2950A	213	30
7381232-200.2950A	228	47	7381740-200.0130A	219	68	738903-2950A	241	30
7381232-200.2950A	229	47	7381740-200.2780A	216	91	738903-2950A	242	30
7381232-200.2950A	230	47	7381740-200.2780A	217	91	738903-2950A	291	30
7381232-200.2950A	231	47	7381740-200.2780A	218	91	738919-0020A	213	21
7381232-200.2950A	232	47	7381740-200.2780A	219	91	738919-0020A	241	21
7381232-200.2950A	291	47	7381740-200.2950A	216	73	738919-0020A	242	21
7381232-201.0020A	227	30	7381740-200.2950A	217	73	7415101.002★	410	236
7381232-201.0020A	228	30	7381740-200.2950A	218	73	7415101.295★	410	331
7381232-201.0020A	229	30	7381740-200.2950A	219	73	7415201.002★	411	216
7381232-201.0020A	230	30	7381741-200.0020A	263	35	7415201.295★ 7415221.002★	411	302
7381232-201.0020A 7381232-201.0020A	231 232	30	7381741-200.0020A	264	35	7415221.002★ 7415221.205★	411	216
7381232-201.0020A 7381232-201.0020A	232	30 30	7381741-200.0020A 7381741-200.0020A	265 266	35 35	7415221.295★ 7415801.002★	411 410	302 331
7381232-201.0020A 7381232-201.0020A	239	30	7381741-200.0020A 7381741-200.2780A	266	67	7415801.002★ 7415801.295★	410	463
7381232-201.0020A	263	30	7381741-200.2780A	263	67	7415821.002★	410	321
7381232-201.2950A	204	47	7381741-200.2780A	265	67	7415821.295★	410	449
7381232-201.2950A	228	47	7381741-200.2780A	266	67	7420101.002 ★	410	274
7381232-201.2950A	229	47	7381741-200.2950A	263	51	7420101.295★	410	382
7381232-201.2950A	230	47	7381741-200.2950A	264	51	7420101P.002★	411	40
7381232-201.2950A	231	47	7381741-200.2950A	265	51	7420101P.295★	411	55
7381232-201.2950A	232	47	7381741-200.2950A	266	51	7420201.002★	411	222
7381232-201.2950A	239	47	7381799-200.0020A	216	62	7420201.295★	411	312
7381232-201.2950A	263	47	7381799-200.0020A	217	62	7420221.002★	411	222
7381232-201.2950A	264	47	7381799-200.0020A	218	62	7420221.295★	411	312
7381286-200.0020A	212	27	7381799-200.0020A	219	62	7420801.002★	410	321
7381297-200.0200A	243	14	7381800-200.0020A	205	68	7420801.295★	410	449
7381297-200.0200A 7381406-200.0020A	244 223	14 39	7381847-200.0020A 7381847-200.0020A	207 209	46 46	7420821.002★	410 410	321 449

American Standard

Product SKU	Page	List Price	Product SKU	Page	List Price	Product SKU	Page	List Price
7430101.002	340	362	7455260.002	490	441	7840.800.820	162	566
7430101.295	340	505	7455260.002	513	441	791165-0020A	128	24
7430151.002	340	429	7455260.013	490	617	791165-0020A	129	24
7430151.295★	340	602	7455260.013	513	617	791165-0020A	130	24
7430152.002 7430152.295	340 340	467 655	7455260.278 7455260.278	490 513	661 661	791363-0070A 791363-0070A	128 129	29 29
7430451.002	340	530	7455260.295	490	617	791363-0070A 791363-0070A	129	29
7430451.295	340	741	7455260.295	513	617	791363-0070A	130	29
7430801.002	340	497	7455451.002	483	441	791165-0020A	131	24
7430801.295	340	695	7455451.013	483	617	791474-0020A	128	83
7433000.075	54	137	7455451.278	483	661	791474-0020A	129	83
7434000.075	26	126	7455451.295	483	617	791474-0020A	130	83
7434000.075	35	126	7455801.002★	482	441	791474-0020A	131	83
7434000.075	36	126	7455801.013★	482	617	791604-203.0750A	25	154
7440101.002	422	335	7455801.278★	482	661	791605-203.0750A	24	183
7440101.295	422	469	7455801.295★	482	617	791637-100.0070A	35	11
7440151.002★	422	381	7455811.002	482	468	791637-100.0070A	36	11
7440151.295★	422	533 412	7455814.002 751755-100	482	414 64	791637-100.0070A	37	11
7440152.002★ 7440152.295★	422	577	754766-200.0110A	83	136	791637-100.0070A 791637-100.0070A	38	11
7440132.293 x	422	394	755179-201.0200A	81	70	791637-100.0070A	40	11
7440801.295	422	551	755446-400.0730A	149	146	791637-100.0070A	55	11
7440851.002	422	381	755427-401.2180A	147	219	791637-100.0070A	56	11
7440851.295	422	533	755429-401.2180A	147	219	791637-100.0070A	57	11
7455018.002	490	62	755431-401.2180A	147	226	791637-100.0070A	58	11
7455018.002	513	62	755433-401.2180A	148	95	791637-100.0070A	59	11
7455018.013	490	85	755440-400.0730A	149	146	791637-100.0070A	60	11
7455018.013	513	85	755453-400.0730A	150	149	791637-100.0070A	61	11
7455018.278	490	92	755453-400.0730A	151	149	791637-100.0070A	62	11
7455018.278	513	92	755453-400.0730A	152	149	791637-100.0070A	63	11
7455018.295	490	85	755495-201.0200A	80	131	791676-100-0070A	28	11
7455018.295	513	85	760087-0070A	286	7	791676-100-0070A	29	11
7455024.002	490	67	760218-101.0200A	287	11	791676-100-0070A	30	11
7455024.002	513	67	760218-101.0210A	287	6	791676-100-0070A	31	11
7455024.013	490 513	93 93	760218-101.2220A	287 286	6 4	791676-100-0070A	32 33	11
7455024.013 7455024.278	490	93	760219-100.0070A 760219-100.0070A	288	4	791676-100-0070A 791676-100-0070A	33	11
7455024.278	513	99	760234.100.0200A	284	17	791676-100-0070A	35	11
7455024.295	490	93	760234.100.2220A	284	17	791676-100-0070A	36	11
7455024.295	513	93	760234.100.0200A	285	17	791676-100-0070A	37	11
7455107.002	482	303	760234.100.2220A	285	17	791676-100-0070A	38	11
7455107.013	482	424	760241-200.0070A	282	27	791676-100-0070A	39	11
7455107.278	482	458	760241-200.0070A	283	27	791676-100-0070A	40	11
7455107.295	482	424	760242-200.0700A	281	27	791676-100-0070A	41	11
7455114.002	482	282	760287-401.0700A	283	120	791676-100-0070A	42	11
7455117.002	482	315	770007-0070A	159	5	791676-100-0070A	43	11
7455190.002	490	39	770248-100.0070A	163	5	791676-100-0070A	44	11
7455190.002	513	39	770251-100.0070A	161	5	791676-100-0070A	45	11
7455190.013	490	54	770252-100.0070A	162	5	791676-100-0070A	46	11
7455190.013 7455190.278	513 490	54 58	770256-200.0020A 770256-200.2950A	163	16 19	791676-100-0070A 791676-100-0070A	47	11
7455190.278	513	58	770258-200.0070A	157	19	791676-100-0070A	40	11
7455190.295	490	54	770259-100.0070A	157	12	791676-100-0070A	50	11
7455190.295	513	54	770262-100.0070A	157	12	791676-100-0070A	51	11
7455207.002	483	276	7720018.002	545	121	791676-100-0070A	52	11
7455207.013	483	386	7720018.295	545	169	791676-100-0070A	53	11
7455207.278	483	414	7760.000.002	161	103	791676-100-0070A	54	11
7455207.295	483	386	7760.000.295	161	155	8012A60GRC-020	283	995
7455210.002	490	28	77DB30190.308	20	916	8012A80GRC-020	282	611
7455210.002	513	28	77DB33220A.308	17	1,505	8013A80GPC-020	282	509
7455210.013	490	39	77DB33223.308	23	815	8017A60GRC-291	280	3,125
7455210.013	513	39	77DB33224.308	23	815	8018A60GRC-020	283	1,683
7455210.278	490	39	77DB36220A.308	16	1,568	8019A60GPC-020	281	458
7455210.278	513	39	77SB16180.308	19	580	8334018.002	419	58
7455210.295	490	39	77SB25223.308	22	607 607	8334018.002	430	58
7455210.295	513	39	77SB25224.308	22	607	8334018.002	514	58
7455214.002	483	259	77SB30190.308	18	907	8334018.295	419	82 82
7455217.002 7455230.002	483	287 50	77SB30220A.308 77SB33220A.308	15	1,311	8334018.295 8334018.295	430	82
7455230.002 7455230.002	490 513	50	77SB33220A.308 77SB33223.308	21	1,357 780	8334018.295 8334024.002	514 419	62
7455230.002 7455230.013	490	70	77SB33223.308 77SB36220A.308	13	1,408	8334024.002	419	62
7455230.013	513	70	7820.400.020	159	290	8334024.002	514	62
7455230.278	490	76	7820.800.020	159	290	8334024.295	419	86
7455230.278	513	76	7840.000.820	161	566	8334024.295	430	86
7455230.295	490	70	7840.000.820	162	566	8334024.295	514	86
	513	70	7840.800.820	161	566			36

American Standard

Product SKU	Page	List Price	Product SKU	Page	List Price	Product SKU	Page	List Price
8334190.002	430	36	8337018.013	407	82	8337210.278	366	38
8334190.002	514	36	8337018.013	440	82	8337210.278	396	38
8334190.295	419	50	8337018.013	509	82	8337210.278	407	38
8334190.295	430	50	8337018.278	359	88	8337210.278	440	38
8334190.295 8334210.002	514 419	50 27	8337018.278 8337018.278	366 396	88 88	8337210.278 8337210.295	509 359	38 38
8334210.002	419	27	8337018.278	407	88	8337210.295	366	38
8334210.002	514	27	8337018.278	407	88	8337210.295	396	38
8334210.295	419	38	8337018.278	509	88	8337210.295	407	38
8334210.295	430	38	8337018.295	359	82	8337210.295	440	38
8334210.295	514	38	8337018.295	366	82	8337210.295	509	38
8334230.002	419	47	8337018.295	396	82	8337230.002	359	47
8334230.002	430	47	8337018.295	407	82	8337230.002	366	47
8334230.002	514	47	8337018.295	440	82	8337230.002	396	47
8334230.295	419	67	8337018.295	509	82	8337230.002	407	47
8334230.295	430	67 67	8337024.002 8337024.002	359 366	62 62	8337230.002	440 509	47 47
8334230.295 8335018.002	514 479	58	8337024.002	396	62	8337230.002 8337230.013	359	67
8335018.002	507	58	8337024.002	407	62	8337230.013	366	67
8335018.295	479	82	8337024.002	440	62	8337230.013	396	67
8335018.295	507	82	8337024.002	509	62	8337230.013	407	67
8335024.002	479	62	8337024.013	359	86	8337230.013	440	67
8335024.002	507	62	8337024.013	366	86	8337230.013	509	67
8335024.295	479	86	8337024.013	396	86	8337230.278	359	72
8335024.295	507	86	8337024.013	407	86	8337230.278	366	72
8335190.002	479	36	8337024.013	440	86	8337230.278	396	72
8335190.002	507	36	8337024.013	509	86	8337230.278	407	72
8335190.295 8335190.295	479	50	8337024.278	359	92 92	8337230.278	440	72 72
8335190.295	507 479	50 27	8337024.278 8337024.278	366 396	92 92	8337230.278 8337230.295	509 359	67
8335210.002	507	27	8337024.278	407	92	8337230.295	366	67
8335210.295	479	38	8337024.278	440	92	8337230.295	396	67
8335210.295	507	38	8337024.278	509	92	8337230.295	407	67
8335230.002	479	47	8337024.295	359	86	8337230.295	440	67
8335230.002	507	47	8337024.295	366	86	8337230.295	509	67
8335230.295	479	67	8337024.295	396	86	8412.000.002	184	75
8335230.295	507	67	8337024.295	407	86	8414000.075	22	124
8336018.002	349	58	8337024.295	440	86	8415000.075	21	134
8336018.002	455	58	8337024.295	509	86	8416000.075	23	165
8336018.002	506	58	8337190.002	359	36	8418000.075	14	144
8336018.295	349	82	8337190.002	366	36	8419000.075	17	165
8336018.295 8336018.295	455 506	82 82	8337190.002 8337190.002	396 407	36 36	8422000.075 8430000.075	19 13	103 165
8336024.002	349	62	8337190.002	407	36	8431000.075	16	185
8336024.002	455	62	8337190.002	509	36	8432000.075	15	134
8336024.002	506	62	8337190.013	359	50	8432000.075	18	134
8336024.295	349	86	8337190.013	366	50	8433000.075	20	165
8336024.295	455	86	8337190.013	396	50	8442.001600.075	48	88
8336024.295	506	86	8337190.013	407	50	8446.312000L.075	51	84
8336190.002	349	36	8337190.013	440	50	8446.312000S.075	51	73
8336190.002	455	36	8337190.013	509	50	8447.311800.075	49	84
8336190.002	506	36	8337190.278	359	54	8447.311800.075	50	84
8336190.295	349	50	8337190.278	366	54	8448.181600.075	46	100
8336190.295	455	50	8337190.278	396	54	8448.181600.075	47	100
8336190.295	506	50	8337190.278	407	54	8449.232100D.075 8452.231700.075	45	100
8336210.002 8336210.002	349 455	27 27	8337190.278 8337190.278	440 509	54 54	8452.231700.075 8459.301800.075	43	110 126
8336210.002	455 506	27	8337190.278	359	54 50	8459.301800.075	41	126
8336210.295	349	38	8337190.295	366	50	8711.000.002	164	799
8336210.295	455	38	8337190.295	396	50	8719.000.002	163	510
8336210.295	506	38	8337190.295	407	50	8719.000.295	163	613
8336230.002	349	47	8337190.295	440	50	8721000.002	157	888
8336230.002	455	47	8337190.295	509	50	8721000.295	157	1,066
8336230.002	506	47	8337210.002	359	27	8888009.002	542	86
8336230.295	349	67	8337210.002	366	27	8888009.278★	542	129
8336230.295	455	67	8337210.002	396	27	8888009.295★	542	120
8336230.295	506	67	8337210.002	407	27	8888019.002*	542	86
8337018.002	349	58	8337210.002	440	27	8888019.278★	542	129
8337018.002	366	58	8337210.002	509	27	8888019.295★	542	120 101
8337018.002 8337018.002	396 407	58 58	8337210.013 8337210.013	359 366	38 38	8888022.002 8888026.002	542 543	33
8337018.002	407	58	8337210.013	396	38	8888035.002	541	62
8337018.002	509	58	8337210.013	407	38	8888035.013	541	86
8337018.013	349	82	8337210.013	440	38	8888035.243	541	92
			8337210.013			8888035.278	541	92
8337018.013	366	82	0337210.013	509	38	0000033.270	541	52

American Standard

Product SKU	Page	List Price	Product SKU	Page	List Price	Product SKU	Page	List Price
8888036.002	541	27	8888109.013	544	155	9024914EC.020	197	302
8888036.013	541	38	8888109.278	544	166	9024921EC.020	197	302
8888036.243	541	40	8888109.295	544	155	9024924EC.020	197	302
8888036.278	541	40	8888110.002	544	99	9028000.075	13	21
8888036.295	541	38	8888110.013	544	139	9028000.075	14	21
8888037.002	541	43	8888110.278	544	150	9028000.075	15	21
8888037.013★	541	60	8888110.295	544	139	9028000.075	16	21
8888037.243	541	65	8888111.002	544	99	9028000.075	17	21
8888037.278	541	65	8888111.013	544	139	9028000.075	18	21
8888037.295	541	60	8888111.278	544	150	9028000.075	19	21
8888038.002	541	75	8888111.295	544	130	9028000.075	20	21
8888038.295	541	113		545	51		20	21
			8888112.002			9028000.075		
8888049.002*	543	79	8888112.013	545	72	9028000.075	22	21
8888049.278*	543	120	8888112.278	545	77	9028000.075	23	21
8888049.295*	543	112	8888112.295	545	72	9028000.075	26	21
8888053.002	541	73	8888113.013	545	29	9028000.075	27	21
8888055.002	542	43	8888113.278	545	31	9028000.075	28	21
8888055.295	542	60	8888113.295	545	29	9028000.075	29	21
8888056.002	543	33	8888114.002	545	179	9028000.075	30	21
8888068.002	541	54	8888114.013	545	251	9028000.075	31	21
8888068.243	541	82	8888114.278	545	270	9028000.075	32	21
8888068.295	541	76	8888114.295	545	251	9028000.075	33	21
8888069.002	541	78	8888316.002	544	83	9028000.075	34	21
3888069.013	541	111	8888316.243	544	124	9028000.075	35	21
3888069.278★	541	144	8888316.295	544	116	9028000.075	36	21
3888069.295	541	111	8888317.002	544	83	9028000.075	37	21
3888087.002	543	90	8888317.243	544	124	9028000.075	38	21
3888087.295★	543	127	8888317.295	544	116	9028000.075	39	21
3888093.002	545	85	8888318.002	544	88	9028000.075	40	21
3888093.013	545	119	8888318.243	544	132	9028000.075	41	21
8888093.278	545	128	8888318.295	544	123	9028000.075	42	21
8888093.295	545	119	8888319.002	544	88	9028000.075	42	21
3888094.002	543	69			132			21
		I I	8888319.243	544		9028000.075	44	
3888094.295	543	96	8888319.295	544	123	9028000.075	45	21
3888095.002	545	51	8888421.002	543	118	9028000.075	46	21
3888095.013	545	72	8888421.295★	543	165	9028000.075	47	21
3888095.278	545	77	8888730.002★	543	42	9028000.075	48	21
8888095.295	545	72	8888730.295★	543	58	9028000.075	49	21
8888096.002	541	21	8888743.002★	542	92	9028000.075	50	21
8888096.013	541	29	8888743.295★	542	130	9028000.075	51	21
8888096.278	541	33	9BP-28 White	74	318	9028000.075	52	21
8888096.295	541	29	9BP-28 Linen	74	318	9028000.075	53	21
8888097.002	544	92	9BP-30 White	74	318	9028000.075	54	21
8888097.295★	544	130	9BP-30 Linen	74	318	9028000.075	55	21
8888098.002	545	85	9BP-32 White	74	318	9028000.075	56	21
8888098.013	545	119	9BP-32 Linen	74	318	9028000.075	57	21
8888098.278	545	128	9EP-28.F White	74	318	9028000.075	58	21
8888098.295	545	119	9EP-28.F Linen	74	318	9028000.075	59	21
8888099.002	543	79	9EP-28.S White	74	318	9028000.075	60	21
3888099.278	543	115	9EP-28.S Linen	74	318	9028000.075	61	21
3888099.295		-						
	543	112	9EP-30.F White	74	318	9028000.075	62	21
3888101.002	543	67	9EP-30.F Linen	74	318	9028000.075	63	21
3888101.013★	543	92	9EP-30.S White	74	318	9035001.002	530	175
3888101.278	543	99	9EP-30.S Linen	74	318	9035001.013	530	219
3888101.295	543	92	9EP-32.F White	74	318	9035001.278	530	241
3888104.002	542	97	9EP-32.F Linen	74	318	9035001.295	530	219
3888104.013	542	136	9EP-32.S White	74	318	9035074.002	524	87
3888104.278	542	147	9EP-32.S Linen	74	318	9035074.013	524	109
3888104.295	542	136	9FHS-CH19 Chrome	74	749	9035074.278	524	120
8888105.002	542	97	9GB-24 Chrome	74	92	9035074.295	524	109
8888105.013	542	136	9HSB Chrome	74	133	9035154.002	533	87
8888105.278	542	147	9ILH Other	74	318	9035154.013	533	109
3888105.295	542	136	9NR Other	74	54	9035154.278	533	120
8888106.002	542	87	9NRGRIP Other	74	57	9035154.295	533	109
3888106.013	542	122	9024000EC.020	196	260	9035254.002	524	153
3888106.278	542	131	9024001EC.020	196	260	9035254.013	524	208
3888106.295	542	122	9024004EC.020	196	260	9035254.278	524	219
3888107.002	542	87	9024008EC.020	196	260	9035254.295	524	208
8888107.013	542	122	9024011EC.020	196	281	9035374.002	525	153
8888107.278	542	131	9024014EC.020	196	281	9035374.013	525	197
3888107.295	542	122	9024021EC.020	196	281	9035374.278	525	208
3888108.002	544	111	9024024EC.020	196	281	9035374.295★	525	197
8888108.013	544	155	9024901EC.020	196	281	9035474.002	525	197
8888108.278	544	166	9024904EC.020	196	281	9035474.013	525	252
			9024908EC.020	196	281	9035474.278	525	263
8888108.295	544	155	9024900EC.020				525	

American Standard

Product SKU	Page	List Price	Product SKU	Page	List Price	Product SKU	Page	List Price
9035804.002	523	445	963554-0020A	549	35	AM00745.436.006	141	936
9035804.278	523	614	963554-2240A	549	65	AM00745.436.213	141	645
9035804.295	523	556	963554-2950A	549	42	AM00745.436.224	141	936
9035888.002	523	49	A8001L-LH0.020	150	682	AM00750.400.006	140	879
9035888.278 9035888.295	523 523	74 64	A8001L-RH0.020 A8002L-LH0.020	150 150	682 692	AM00750.400.213 AM00750.400.224	140 140	662 879
9036.030.020	161	1,081	A8002L-LH0.020 A8002L-RH0.020	150	692	AM00750.422.006	140	922
9036.030.475	161	1,081	A8003L-LH0.020	150	758	AM00750.422.213	140	662
9038001.002	530	175	A8003L-RH0.020	150	758	AM00750.422.224	140	922
9038001.013	530	219	A8004L-C0.020	151	657	AM00750.436.006	140	922
9038001.278	530	241	A8007D-FCO.020	152	783	AM00750.436.213	140	662
9038001.295	530	219	A8009D-FCO.020	152	662	AM00750.436.224	140	922
9038074.002	524	87	A954440-0070A	548	35	AM00758.436.006	140	879
9038074.013	524 524	109 120	AM00330.400.006	138 138	1,187 967	AM00758.436.213	140 140	661 879
9038074.278 9038154.002	533	87	AM00330.400.213 AM00330.400.224	138	1,187	AM00758.436.224 AM00770.400.006	140	936
9038154.013	533	109	AM00335.400.006	139	1,152	AM00770.400.213	143	738
9038154.278	533	120	AM00335.400.213	139	837	AM00770.400.224	143	936
9038154.295	533	109	AM00335.400.224	139	1,152	AM00770.422.006	143	936
9038254.002	524	153	AM00345.400.006	139	1,315	AM00770.422.213	143	738
9038254.013	524	208	AM00345.400.213	139	1,059	AM00770.422.224	143	936
9038254.278	524	219	AM00345.400.224	139	1,315	AM00770.436.006	143	936
9038254.295 9038374.002	524 525	208 153	AM00350.400.006 AM00350.400.213	137 137	1,099 815	AM00770.436.213 AM00770.436.224	143 143	738 936
9038374.002	525	153	AM00350.400.213 AM00350.400.224	137	1,099	AM00770.436.224 AM00775.400.006	143	936
9038374.278	525	208	AM00350.400.224 AM00350.422.006	137	1,230	AM00775.400.213	142	645
9038374.295	525	197	AM00350.422.213	137	1,000	AM00775.400.224	142	936
9038474.002	525	197	AM00350.422.224	137	1,230	AM00775.422.006	142	936
9038474.013	525	252	AM00370.400.006	138	1,112	AM00775.422.213	142	645
9038474.278	525	263	AM00370.400.213	138	895	AM00775.422.224	142	936
9038474.295★	525	252	AM00370.400.224	138	1,112	AM00775.436.006	142	936
9038804.002 9038804.278	523 523	445 614	AM00370.422.006 AM00370.422.213	138 138	1,271 1,037	AM00775.436.213 AM00775.436.224	142 142	645 936
9038804.295	523	556	AM00370.422.224	138	1,037	AM007790.400.006	142	993
9038824.002	523	365	AM00390.400.006	138	1,465	AM00790.400.213	143	814
9038834.002	523	415	AM00390.400.213	138	1,128	AM00790.400.224	143	993
9039.030.020	162	720	AM00390.400.224	138	1,465	AM00790.436.006	143	993
9039.030.475	162	720	AM00390.422.006	138	1,687	AM00790.436.213	143	814
9056030.020	158	706	AM00390.422.213	138	1,309	AM00790.436.224	143	993
9056030.476	158	706	AM00390.422.224	138	1,687	AM00795.400.006	142	1,064
9062.008.020 9075.120	12 92	1,117 311	AM00394.400.006 AM00394.400.213	139 139	1,354 1,133	AM00795.400.213 AM00795.400.224	142 142	828 1,064
9135073.002	526	98	AM00394.400.224	139	1,354	AM00703.400.224	144	444
9135073.013	526	121	AM00729.400.006	142	1,000	AM00801.422.213	144	444
9135073.278	526	131	AM00729.400.213	142	727	AM00801.436.213	144	444
9135073.295	526	121	AM00729.400.224	142	1,000	AM00802.400.213	144	451
9138073.002	526	98	AM00729.422.006	142	1,000	AM00802.422.213	144	451
9138073.013	526	121	AM00729.422.213	142	727	AM00802.436.213	144	451
9138073.278 9138073.295	526 526	131 121	AM00729.422.224 AM00729.436.006	142 142	1,000 1,000	AM00806.400.213 AM00806.422.213	144 144	462 462
9205.024.339	165	660	AM00729.436.213	142	727	AM00806.436.213	144	462
9205.101.339	165	218	AM00729.436.224	142	1,000	AM00810.400.006	134	2,279
9210.030.020	159	1,083	AM00730.400.006	143	879	AM00810.400.213	134	1,752
9210.030.322	159	1,083	AM00730.400.213	143	662	AM00811.400.006	134	2,723
9210.101.020	160	257	AM00730.400.224	143	879	AM00811.400.213	134	2,095
9210.101.322	160	257	AM00730.422.006	143	879	AM00812.400.006	135	2,307
9210.224.322 9260.018.020	160 120	928 340	AM00730.422.213 AM00730.422.224	143 143	662 879	AM00812.400.213 AM00814.400.006	135 135	1,775 2,246
9260.018.020	120	340	AM00730.436.006	143	879	AM00814.400.008 AM00814.400.213	135	1,728
9260.018.020	122	340	AM00730.436.213	143	662	AM00816.400.006	136	2,212
9261.019.020	98	264	AM00730.436.224	143	879	AM00816.400.213	136	1,702
9261.019.020	99	264	AM00735.400.006	141	892	AM00817.400.006	136	2,016
9271.019.020	100	299	AM00735.400.213	141	672	AM00817.400.213	136	1,550
9272.018.020	119	365	AM00735.400.224	141	892	AM00819.400.006	136	1,432
9272.018.020 9330.014	118 92	365	AM00735.422.006	141	892 672	AM00819.400.213	136	1,102
9330.014 9431.888.002	92 306	44 33	AM00735.422.213 AM00735.422.224	141	892	AM00821.400.006 AM00821.400.213	134 134	1,586
9431.888.075	306	40	AM00735.436.006	141	892	AM00822.400.006	134	1,713
9482.000.020	193	124	AM00735.436.213	141	672	AM00822.400.213	134	1,318
952377-0070A	548	26	AM00735.436.224	141	892	AM00824.400.213	135	606
9960.001.020	184	245	AM00745.400.006	141	936	AM00830.400.213	135	808
9960.403.020	184	245	AM00745.400.213	141	645	AMOPQF1.400.006	145	1,338
9960.803.020	184	245	AM00745.400.224	141	936	AMOPQF1.400.213	145	1,033
963434-0020A	549 549	132 150	AM00745.422.006 AM00745.422.213	141 141	936 645	AMOPQF1.400.224 AMOPQF1.436.006	145	1,338
963434-2240A 963434-2950A	549 549	168	AM00745.422.213 AM00745.422.224	141	936	AMOPQF1.436.213	145 145	1,397 1,005
								.,

American Standard

Page

List Price

Product SKU

Page

List Price

Product SKU

Product SKU

Fixtures and Faucets

Page

	Product SKU	Page	LIST Price	Product SKU	Page	LIST Price	Product SKU	Page	L
	AMOPQF1.436.224	145	1,397	R433	477	232	R701	347	Ē
	AMOPQF2.400.006	145	1,338	R433	488	232	R701	417	L
	AMOPQF2.400.213	145	1,033	R433	500	232	R701	428	l
	AMOPQF2.400.224	145	1,338	R433S	347	232	R701	453	L
	AMOPQF2.436.006	145	1,397	R433S	376	232	R701	477	f
	AMOPQF2.436.213	145	1,005	R433S	395	232	R701	499	L
									l
Index	AMOPQF2.436.224	145	1,397	R433S	405	232	R711	347	
ğ	AMPQF14.400.006	145	1,338	R433S	417	232	R711	417	l
<u> </u>	AMPQF14.400.213	145	1,033	R433S	428	232	R711	428	L
	AMPQF14.400.224	145	1,338	R433S	453	232	R711	453	L
	AMPQF14.436.006	145	1,397	R433S	465	232	R711	477	ſ
	AMPQF14.436.213	145	1,005	R433S	477	232	R711	499	l
	AMPQF14.436.224	145	1,397	R433S	488	232	R900	341	ſ
	AMPQF16.400.006	145	1,338	R433S	500	232	R900	356	L
	AMPQF16.400.213			R510★			R900	372	l
		145	1,033		346	381			
	AMPQF16.400.224	145	1,338	R510★	416	381	R900	383	ŀ
	AMPQF16.422.006	145	1,594	R510★	427	381	R900	392	L
	AMPQF16.422.213	145	1,271	R510★	452	381	R900	401	
	AMPQF16.422.224	145	1,594	R510★	476	381	R900	412	
	M922887-0020A	546	16	R510★	499	381	R900	423	l
	M922888-0020A	546	14	R520★	345	358	R900	446	Ē
	M922901-0020A	546	8	R520★	375	358	R900	460	L
	M922903-0020A	546	9	R520★	404	358	R900	471	ł
	M922903-2950A	546	12		415	358	R900	484	
				R520★					ſ
	M922991-0020A	546	6	R520★	426	358	R900	495	L
	M922991-2240A	546	12	R520★	451	358	R910	341	Ļ
	M922991-2950A	546	9	R520★	464	358	R910	356	ĺ
	M922992-0020A	546	6	R520★	475	358	R910	372	ĺ
	M922996-0020A	546	16	R520★	487	358	R910	383	Ī
	M922997-0020A	546	16	R520★	498	358	R910	392	L
	M950338-0070A	304	62	R522★	345	325	R910	401	l
	M950338-0070A	306	62	R522★	375	325	R910	412	
									ł
	M954334-0070A	547	5	R522★	404	325	R910	423	L
	M960131-0070A	327	35	R522★	415	325	R910	446	l
	M960131.0070A	346	35	R522★	426	325	R910	460	l
	M961850-0020A	311	17	R522★	451	325	R910	471	l
	M961850-0750A	311	25	R522★	464	325	R910	484	L
	M962818-0020A	548	48	R522★	475	325	R910	495	L
	M962818-2950A	548	56	R522★	487	325	R950	337	ſ
	M970410-0070A	547	71	R522★	498	325	R950	342	
	M970451-0070A	547	13	R522S★	345	325	R950	446	ſ
	M970452-0070A	547	9	R522S★	375	325	R950	461	L
	M970645-0070A	547	71	R522S★	404	325	R950	472	l
	M970648-0070A	547	5	R522S★	415	325	R950	484	ŀ
	M970652-0070A	547	49	R522S★	426	325	R950SS	337	L
	R116SS	450	163	R522S★	451	325	R950SS	342	L
	R422	347	205	R522S★	464	325	R950SS	446	l
	R422	376	205	R522S★	475	325	R950SS	461	
	R422	395	205	R522S★	487	325	R950SS	472	L
	R422	405	205	R522S★	498	325	R950SS	484	L
	R422	417	205	R523★	345	352	RU101	344	l
	R422	428	205	R523★	375	352	RU101	358	
	R422	453	205	R523★	404	352	RU101	374	f
	R422	465	205	R523★	415	352	RU101	385	l
	R422 R422						RU101		þ
		477	205	R523★	426	352		394	ĺ
	R422	488	205	R523★	451	352	RU101	403	f
	R422	500	205	R523★	464	352	RU101	414	L
	R422S	347	205	R523★	475	352	RU101	425	L
	R422S	376	205	R523★	487	352	RU101	439	
	R422S	395	205	R523★	498	352	RU101	449	ĺ
	R422S	405	205	R523S★	345	352	RU101	463	Í
	R422S	417	205	R523S★	375	352	RU101	494	L
	R422S	428	205	R523S★	404	352	RU101	486	l
	R422S	453	205	R523S★	415	352	RU101	497	l
								344	ſ
	R422S	465	205	R523S★	426	352	RU101SS		l
	R422S	477	205	R523S★	451	352	RU101SS	358	ŀ
	R422S	488	205	R523S★	464	352	RU101SS	374	
	R422S	500	205	R523S★	475	352	RU101SS	385	ſ
	R433	347	232	R523S★	487	352	RU101SS	394	l
	R433	376	232	R523S★	498	352	RU101SS	403	l
	R433	395	232	R530★	346	436	RU101SS	414	l
	R433	405	232	R530★	416	436	RU101SS	425	ĺ
	R433	417	232	R530★	427	436	RU101SS	439	f
	R433	428	232	R530★	452	436	RU101SS	449	l
	R433	420	232	R530★	476	436	RU101SS	443	h
	R433	465	232	R530★	499	436	RU101SS	494	í
							1	. Ct	-



Product SKU	Page	List Price	Product SKU	Page	List Price	Product SKU	Page	List Price
RU101SS	486	91	RU107SS	394	91	RU109	463	84
RU101SS	497	91	RU107SS	403	91	RU109	494	84
RU102	344	64	RU107SS	414	91	RU109	486	84
RU102	358	64	RU107SS	425	91	RU109	497	84
RU102	374	64	RU107SS	439	91	RU109SS	344	111
RU102	385	64	RU107SS	449	91	RU109SS	358	111
RU102	394	64	RU107SS	463	91	RU109SS	374	111
RU102 RU102	403	64 64	RU107SS RU107SS	494 486	91 91	RU109SS RU109SS	385 394	111
RU102 RU102	414	64	RU107SS	480	91	RU109SS	403	111
RU102	439	64	RU108	344	64	RU109SS	414	111
RU102	449	64	RU108	358	64	RU109SS	425	111
RU102	463	64	RU108	374	64	RU109SS	439	111
RU102	494	64	RU108	385	64	RU109SS	449	111
RU102	486	64	RU108	394	64	RU109SS	463	111
RU102	497	64	RU108	403	64	RU109SS	494	111
RU102SS	344	91	RU108	414	64	RU109SS	486	111
RU102SS	358	91	RU108	425	64	RU109SS	497	111
RU102SS	374	91	RU108	439	64	SSA4828LA-BC	77	4,836
RU102SS	385	91	RU108	449	64	SSA4828LA-WH	77	4,836
RU102SS	394	91	RU108	463	64	SSA4828LD-BC	77	5,290
RU102SS	403	91	RU108	494	64	SSA4828LD-WH	77	5,290
RU102SS RU102SS	414 425	91 91	RU108 RU108	486 497	64 64	SSA4828LJ-BC SSA4828LJ-WH	77 77	4,534 4,534
RU102SS	425	91	RU108E	344	84	SSA4828LS-BC	77	4,007
RU102SS	439	91	RU108E	358	84	SSA4828LS-WH	77	4,007
RU102SS	463	91	RU108E	374	84	SSA4828RA-BC	77	4,836
RU102SS	494	91	RU108E	385	84	SSA4828RA-WH	77	4,836
RU102SS	486	91	RU108E	394	84	SSA4828RD-BC	77	5,290
RU102SS	497	91	RU108E	403	84	SSA4828RD-WH	77	5,290
RU107	344	64	RU108E	414	84	SSA4828RJ-BC	77	4,534
RU107	358	64	RU108E	425	84	SSA4828RJ-WH	77	4,534
RU107	374	64	RU108E	439	84	SSA4828RS-BC	77	4,007
RU107	385	64	RU108E	449	84	SSA4828RS-WH	77	4,007
RU107	394	64	RU108E	463	84	SSA5230LA-BC	77	5,408
RU107	403	64	RU108E	494	84	SSA5230LA-WH	77	5,408
RU107	414	64	RU108E	486	84	SSA5230LD-BC	77	6,012
RU107	425	64	RU108E	497	84	SSA5230LD-WH	77	6,012
RU107	439	64	RU108ESS	344	111	SSA5230LJ-BC	77	5,256
RU107	449	64	RU108ESS	358	111	SSA5230LJ-WH	77	5,256
RU107	463	64 64	RU108ESS RU108ESS	374	111	SSA5230LS-BC	77	4,729 4,729
RU107 RU107	494 486	64	RU108ESS	385 394	111	SSA5230LS-WH SSA5230RA-BC	77	5,408
RU107	497	64	RU108ESS	403	111	SSA5230RA-BC SSA5230RA-WH	77	5,408
RU107E	344	84	RU108ESS	414	111	SSA5230RD-BC	77	6,012
RU107E	358	84	RU108ESS	425	111	SSA5230RD-WH	77	6,012
RU107E	374	84	RU108ESS	439	111	SSA5230RJ-BC	77	5,256
RU107E	385	84	RU108ESS	449	111	SSA5230RJ-WH	77	5,256
RU107E	394	84	RU108ESS	463	111	SSA5230RS-BC	77	4,729
RU107E	403	84	RU108ESS	494	111	SSA5230RS-WH	77	4,729
RU107E	414	84	RU108ESS	486	111	SSA6030LA-BC	77	5,441
RU107E	425	84	RU108ESS	497	111	SSA6030LA-WH	77	5,441
RU107E	439	84	RU108SS	344	91	SSA6030LD-BC	77	6,046
RU107E	449	84	RU108SS	358	91	SSA6030LD-WH	77	6,046
RU107E	463	84	RU108SS	374	91	SSA6030LJ-BC	77	5,214
RU107E	494	84	RU108SS	385	91	SSA6030LJ-WH	77	5,214
RU107E	486	84	RU108SS	394	91	SSA6030LS-BC	77	4,687
RU107E RU107ESS	497 344	84 111	RU108SS RU108SS	403	91 91	SSA6030LS-WH SSA6030RA-BC	77	4,687 5,441
RU107ESS RU107ESS	344	111	RU108SS RU108SS	414	91	SSA6030RA-WH	77	5,441
RU107ESS RU107ESS	358	111	RU108SS	425	91	SSA6030RD-WH	77	6,046
RU107ESS	385	111	RU108SS	449	91	SSA6030RD-BC	77	6,046
RU107ESS	394	111	RU108SS	463	91	SSA6030RJ-BC	77	5,214
RU107ESS	403	111	RU108SS	494	91	SSA6030RJ-WH	77	5,214
RU107ESS	414	111	RU108SS	486	91	SSA6030RS-BC	77	4,687
RU107ESS	425	111	RU108SS	497	91	SSA6030RS-WH	77	4,687
RU107ESS	439	111	RU109	344	84	T018900.002	383	441
RU107ESS	449	111	RU109	358	84	T018900.278	383	661
RU107ESS	463	111	RU109	374	84	T018900.295	383	617
RU107ESS	494	111	RU109	385	84	T018901.002	383	607
RU107ESS	486	111	RU109	394	84	T018901.278	383	909
RU107ESS	497	111	RU109	403	84	T018901.295	383	849
RU107SS	344	91	RU109	414	84	T052430.002	376	103
RU107SS	358	91	RU109	425	84	T052430.013	376	144
RU107SS	374	91	RU109	439	84	T052430.278	376	154
RU107SS	385	91	RU109	449	84	T052430.295	376	144



Product SKU	Page	List Price	Product SKU	Page	List Price	Product SKU	Page	List Price
T052432.002	376	103	T184730.002★	476	168	T430730.295★	346	243
T052432.013	376	144	T184730.295★	476	236	T430740.002★	345	249
T052432.278	376	154	T184740.002★	475	241	T430740.295★	345	349
T052432.295 T052740.002★	376 375	144 231	T184740.295★ T184900.002★	475	338 607	T430900.002 T430900.295	341 341	634 888
T052740.013★	375	323	T184900.295★	471	849	T430901.002★	341	800
T052740.278★	375	346	T184901.002	471	772	T430901.295★	341	1,119
T052740.295*	375	323	T184901.295	471	1,080	T440430.002	428	108
T052900.002	372	308	T184951.002	337	1,128	T440430.295★	428	151
T052900.013	372	431	T184951.002	342	1,128	T440700.002	428	80
T052900.278	372	461	T184951.002	472	1,128	T440700.295★	428	113
T052900.295	372	431	T184951.295	337	1,579	T440730.002★	427	172
T052901.002	372	431	T184951.295	342	1,579	T440730.295★	427	240
T052901.013	372	603	T184951.295	472	1,579	T440730.224★	427	252
T052901.278 T052901.295	372 372	646 603	T186430.002 T186430.278★	395 395	98 148	T440740.002★ T440740.295★	426 426	246 343
T064430.002	453	106	T186430.295	395	137	T440740.223★	426	360
T064430.295	453	148	T186900.002★	392	414	T440900.002	423	551
T064602.002	450	391	T186900.278*	392	621	T440900.295*	423	772
T064700.002	453	79	T186900.295	392	579	T440901.002	423	716
T064700.295	453	112	T186901.002	392	579	T440901.295	423	1,003
T064730.002★	452	168	T186901.278	392	869	T455430.002	488	111
T064730.295*	452	236	T186901.295	392	811	T455430.013	488	155
T064740.002★	451	241	T353430.002	500	105	T455430.278	488	166
T064740.295★	451	338	T353430.013	500	147	T455430.295	488	155
T064900.002	446	551	T353430.278	500	158	T455740.002★	487	248
T064900.295 T064901.002	446 446	772 716	T353430.295 T353700.002	500 499	147 78	T455740.013★ T455740.278★	487 487	347 369
T064901.295	440	1,003	T353700.013	499	109	T455740.295★	487	309
T064951.002	337	1,076	T353700.278	499	118	T455900.002	484	551
T064951.002	446	1,076	T353700.295	499	109	T455900.013	484	772
T064951.002	461	1,076	T353730.002★	499	166	T455900.278	484	827
T064951.243	337	1,614	T353730.013★	499	233	T455900.295	484	772
T064951.243	461	1,614	T353730.278★	499	250	T455901.002	484	772
T064951.295	337	1,507	T353730.295★	499	233	T455901.013	484	1,080
T064951.295	446	1,507	T353740.002★	498	238	T455901.278	484	1,157
T064951.295	461	1,507	T353740.013*	498	333	T455901.295	484	1,080
T064WDXH.602.002*	450	366	T353740.278★	498	357	T455951.002	337	1,230
T075920.002	356 356	359	T353740.295★	498 495	333 496	T455951.002	484	1,230 1,722
T075920.278 T075920.295	356	538 502	T353900.002 T353900.013	495	695	T455951.013 T455951.013	484	1,722
T075921.002	356	524	T353900.278	495	744	T455951.278	337	1,845
T075921.278	356	786	T353900.296	495	695	T455951.278	484	1,845
T075921.295	356	733	T353901.002	495	661	T455951.295	337	1,722
T105430.002	465	105	T353901.013	495	926	T455951.295	484	1,722
T105430.243	465	160	T353901.278	495	992	TU018500.002	384	183
T105430.295	465	147	T353901.295	495	295	TU018500.278	384	261
T105740.002*	4674	238	T420430.002★	417	106	TU018500.295	384	246
T105740.243★	464	359	T420430.295★	417	148	TU018501.002	384	207
T105740.295★	464	333	T420432.002★	417	106	TU018501.278	384	297
T105900.002	460	386	T420432.295★	417	148	TU018501.295	384	278
T105900.243 T105900.295	460	579 540	T420700.002★ T420700.295★	417	79 112	TU018502.002 TU018502.278	384	230 331
T105901.002	460	551	T420702.002★	417	79	TU018502.295	384	312
T105901.243	460	827	T420702.295★	417	112	TU018507.002	384	207
T105901.295	460	772	T420730.002★	416	168	TU018507.278	384	297
T106430.002★	405	105	T420730.224★	416	247	TU018507.295	384	278
T106430.013★	405	147	T420730.295★	416	236	TU018508.002	384	230
T106430.278*	405	158	T420732.002★	416	168	TU018508.278	384	331
T106430.295*	405	147	T420732.224★	416	247	TU018508.295	384	312
T106740.002★	404	238	T420732.295★	416	236	TU052500.002	373	179
T106740.013★	404	333	T420740.002★	415	241	TU052500.013	373	251
T106740.278★	404	357	T420740.295★	415	338	TU052500.278	373	270
T106740.295★	404	333	T420900.002★	412	414	TU052500.295	373	251
T106900.002 T106900.013	401 401	496 695	T420900.295★ T420901.002★	412	579 579	TU052501.002 TU052501.013	373 373	220 309
T106900.278	401	744	T420901.295★	412	811	TU052501.278	373	309
T106900.295	401	695	T420920.002★	412	414	TU052501.295	373	309
T106901.002	401	661	T420920.295★	412	579	TU052502.002	373	256
T106901.013	401	926	T420921.002★	412	579	TU052502.013	373	359
T106901.278	401	992	T420921.295★	412	811	TU052502.278	373	384
T106901.295	401	926	T430430.002	347	109	TU052502.295	373	359
T184430.002	477	103	T430430.295	347	153	TU052507.002	373	220
T184430.295	477	144	T430700.002	347	83	TU052507.013	373	309
T184700.002	477	78	T430700.295	347	116	TU052507.278	373	331
T184700.295	477	109	T430730.002★	346	173	TU052507.295	373	309

American Standard

Product SKU	Page	List Price	Product SKU	Page	List Price	Product SKU	Page	List Price
 TU052508.002	373	256	TU184508.002	473	405	TU430508.295*	343	539
TU052508.013	373	359	TU184508.295★	473	556	TU440500.002	424	218
TU052508.278	373	384	TU186500.002	393	188	TU440500.295	424	296
TU052508.295	373	359	TU186500.278	393	269	TU440501.002	424	317
TU064500.002	447	239	TU186500.295	393	252	TU440501.295	424	433
TU064500.295 TU064501.002	447 447	323 323	TU186501.002 TU186501.278★	393 393	214 308	TU440502.002 TU440502.295	424	371 508
TU064501.295	447	443	TU186501.295	393	289	TU440507.002★	424	317
TU064501WDXH.002	448	298	TU186501XH.002★	393	205	TU440507.295★	424	433
TU064501WDXH.295*	448	406	TU186502.002	393	238	TU440508.002	424	371
TU064502.002	447	363	TU186502.278	393	343	TU440508.295*	424	508
TU064502.295	447	497	TU186502.295	393	321	TU455500.002	485	237
TU064502WDXH.002	448	337	TU186507.002*	393	214	TU455500.013	485	320
TU064502WDXH.295	448	462	TU186507.278*	393	308	TU455500.278	485	341
TU064507.002	447	323	TU186507.295	393	289	TU455500.295	485	320
TU064507.295	447	443	TU186508.002	393 393	238	TU455501.002	485	341 466
TU064508.002 TU064508.295★	447 447	363 497	TU186508.278★ TU186508.295	393	343 321	TU455501.013 TU455501.278	485 485	400
TU075500.002	357	73	TU353500.002	496	212	TU455501.295	485	498
TU075500.278	357	96	TU353500.013	496	286	TU455502.002	485	423
TU075500.295	357	92	TU353500.278	496	304	TU455502.013	485	582
TU075507.002	357	96	TU353500.295	496	286	TU455502.278	485	622
TU075507.278	357	131	TU353501.002	496	271	TU455502.295	485	582
TU075507.295	357	124	TU353501.013	496	367	TU455507.002	485	341
TU075507XH.002	357	94	TU353501.278	496	393	TU455507.013	485	466
TU075507XH.278	357	128	TU353501.295	496	367	TU455507.278	485	498
TU075507XH.295*	357 357	121 121	TU353502.002	496 496	304 416	TU455507.295	485 485	466 423
TU075508.002 TU075508.278	357	121	TU353502.013 TU353502.278	496	416	TU455508.002 TU455508.013	485	423
TU075508.295	357	158	TU353502.295	496	416	TU455508.278	485	622
TU075508XH.002	357	119	TU353507.002	496	271	TU455508.295	485	582
TU075508XH.278	357	165	TU353507.013	496	367			
TU075508XH.295*	357	155	TU353507.278	496	393			
TU105500.002	462	226	TU353507.295	496	367			
TU105500.243	462	325	TU353508.002	496	304			
TU105500.295	462	304	TU353508.013	496	416			
TU105501.002	462	304	TU353508.278	496	444			
TU105501.243	462	446	TU353508.295	496	416			
TU105501.295 TU105502.002	462 462	416 342	TU385500.002 TU385500.295	437 437	97 126			
TU105502.243	462	501	TU385500WD.002★	437	93			
TU105502.295	462	467	TU385501.002	437	138			
TU105507.002	462	304	TU385501.295	437	182			
TU105507.243	462	446	TU385501XH.295	437	171			
TU105507.295	462	416	TU385502.002	437	173			
TU105508.002	462	342	TU385502.295	437	232			
TU105508.243	462	501	TU385502WD.002*	437	180			
TU105508.295	462	467	TU385507.002	438	138			
TU106500.002	402	204	TU385507.295 TU385508.002	438 438	182			
TU106500.013 TU106500.278	402 402	275 293	TU385508.295	438	173 232		_	
TU106500.295	402	295	TU385501WDXH.002★	438	137			
TU106501.002	402	293	TU385501WDXH.295	438	181			
TU106501.013*	402	401	TU385502WDXH.002	438	171			
TU106501.278	402	427	TU385502WDXH.295	438	229			
TU106501.295	402	401	TU415500.002*	413	146			
TU106502.002	402	344	TU415500.295*	413	194			
TU106502.013	402	472	TU415501.002*	413	182			
TU106502.278	402	503	TU415501.295*	413	244			
TU106502.295 TU106507.002★	402 402	472 293	TU415502.002★ TU415502.295★	413 413	199 268			
TU106507.013★	402	401	TU420500.002★	413	149			
TU106507.278	402	401	TU420500.295★	413	143			
TU106507.295	402	401	TU420501.002★	413	183			
TU106508.002	402	344	TU420501.295*	413	246			
TU106508.013★	402	472	TU420502.002*	413	203			
TU106508.278	402	503	TU420502.295*	413	274			
TU106508.295★	402	472	TU430500.002	343	262			
TU184500.002	473	272	TU430500.295*	343	358			
TU184500.295	473 473	370 363	TU430501.002	343 343	350 479			
TU184501.002 TU184501.295	473	497	TU430501.295 TU430502.002	343	393			
TU184502.002	473	497	TU430502.295	343	539			
TU184502.295★	473	556	TU430507.002★	343	350			
TU184507.002	473	363	TU430507.295*	343	479			

American Standard


Notes







Related Literature



Commercial Fittings and Fixtures List Price Guide 2020



2020 LIXIL Builder Advantage Program Brochure



2020 AS Distributor Support Brochure

For American Standard Customer Care Call 1-800-442-1902 or Fax: 1-800-327-9387

Visit www.Americanstandard-us.com

Front Cover: Town Square® S Suite Inside Back Cover: Spectra Versa™ Shower System

