Eureka (707)-443-8095 Ukiah (707)-485-5481 Crescent City (707)-464-8303

Thrifty Supply Company

Wholesale Plumbing & Heating Supplies -- www.thriftysupplyco.com

11-01-18 Replaces 10-01-18


1-19

Motor

Well Casing

4" Min


Water Systems Tanks & Fittings

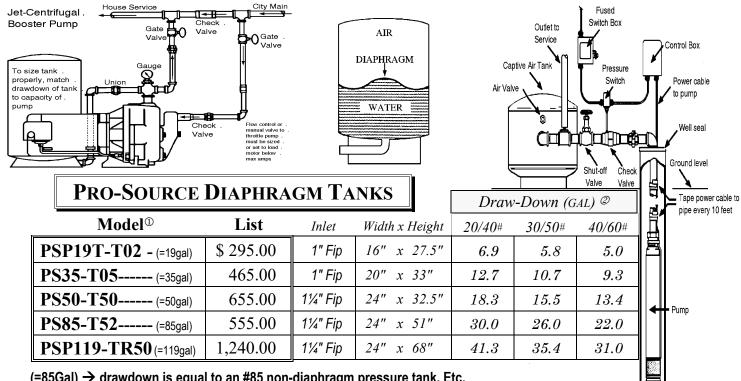

(=85Gal) → drawdown is equal to an #85 non-diaphragm pressure tank. Etc.

- ① Maximum Working Pressure 100# ◆ 5 Year Warranty
- ② To find your minimum tank size: Match your system flow rate GPM to your pressure switch draw-down GPM to provide at least 1 minute pump run time.

The empty tank pressure should be 2psi less than the cut-in pressure of the pressure switch.



4-IN-1 Plastic Foot Valve \$ 12.75

Pressure Switches

(Import) $MPSM1^{\circ} - 30/50 \sim 40/60 \sim 50/70$ \$ 12.25 $MPSM4^{\circ} - 30/50 \sim 40/60 \sim 50/70$ 13.00 $MPSP^{3} - 30/50 \sim 40/60$ 16.00 80.00 XHD^{\oplus} - 60/80 ~ 80/100 DG₂ 60.00 Rod-Float Switch Emptying 60.00 **DG2-**R Rod-Float Switch Filling

On/Off Switch, With Low Pressure Cut-off. ³ With Pulsation Plug, ⁴ Xtra Heavy Duty

PVC Tank Tee



Air Volume Controls

=	
AV-42	\$ 51.00
AV-80	51.00
S-Well*	52.00

* Shallow Well Float

Pressure Gauges

2" Face 100# (import)	\$ 4.25
2" Face (15#,,600#)	11.35
2½"Face	15.50
2½"Face liquid filled	28.00
Water Test Gauge 160#	13.00

1¼"Mip x 1"Fip PVC	\$ 11.45
$1''$ or $1\frac{1}{4}$ " stainless steel	22.50

Typical Installations

