
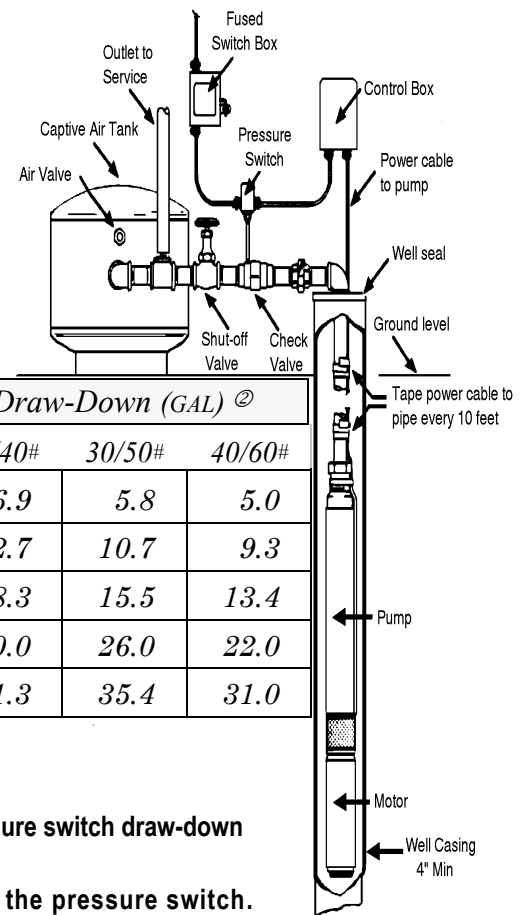



WATER SYSTEMS TANKS & FITTINGS

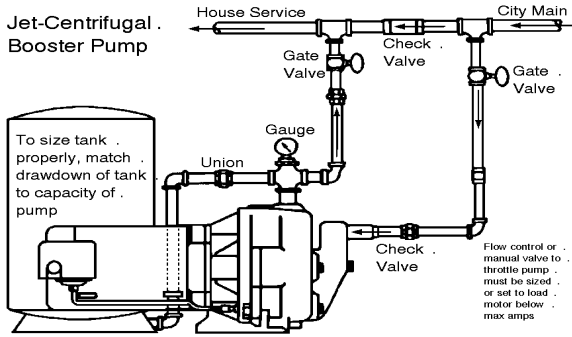

PRO-SOURCE DIAPHRAGM TANKS

Model [Ⓛ]	List	Inlet	Width x Height	Draw-Down (GAL) [Ⓜ]		
				20/40#	30/50#	40/60#
PSP19T-T02 (=19gal)	\$ 278.00	1" Fip	16" x 27.5"	6.9	5.8	5.0
PS35-T05 (=35gal)	425.00	1" Fip	20" x 33"	12.7	10.7	9.3
PS50-T50 (=50gal)	595.00	1 1/4" Fip	24" x 32.5"	18.3	15.5	13.4
PS85-T52 (=85gal)	510.00	1 1/4" Fip	24" x 51"	30.0	26.0	22.0
PSP119-TR50 (=119gal)	930.00	1 1/4" Fip	24" x 68"	41.3	35.4	31.0

(=85Gal) → drawdown is equal to an #85 non-diaphragm pressure tank. Etc.

Ⓛ Maximum Working Pressure 100# ♦ 5 Year Warranty

Ⓜ To find your minimum tank size: Match your system flow rate GPM to your pressure switch draw-down GPM to provide at least 1 minute pump run time.

The empty tank pressure should be 2psi less than the cut-in pressure of the pressure switch.



*Pump Check

*Foot Valves

Plastic Screens


1/2"	\$ 8.00		
3/4"	10.50	\$ 9.50	\$ 2.29
1"	13.50	16.00	2.67
1 1/4"	20.50	17.50	3.82
1 1/2"	26.50	29.00	4.61
2"	48.00	38.00	5.35

* = No-Lead Brass spring checks & foot valves

4-IN-1 Plastic Foot Valve \$ 12.75

Pressure Switches


(Import)



MPSM1 [Ⓛ]	- 30/50 ~ 40/60 ~ 50/70	\$ 12.25
MPSM4 [Ⓜ]	- 30/50 ~ 40/60 ~ 50/70	13.00
MPSP [Ⓝ]	- 30/50 ~ 40/60	16.00
XHD [Ⓞ]	- 60/80 ~ 80/100	80.00
DG2	Rod-Float Switch Emptying	60.00
DG2-R	Rod-Float Switch Filling	60.00

Ⓛ On/Off Switch, Ⓜ With Low Pressure Cut-off,

Ⓝ With Pulsation Plug, Ⓞ Xtra Heavy Duty



PVC



SS

Tank Tee



Air Volume Controls

AV-42	\$ 51.00
AV-80	51.00
S-Well*	52.00

* Shallow Well Float

Pressure Gauges

2" Face	100# (import)	\$ 4.25
2" Face	(15#,...,600#)	11.35
2 1/2" Face		15.50
2 1/2" Face	liquid filled	28.00
Water Test Gauge	160#	13.00

1 1/4" Mip x 1" Fip PVC \$ 11.45

1" or 1 1/4" STAINLESS STEEL 22.50

Typical Installations

NOTE - TWO WIRE INSTALLATION

On two wire pump installations the control box is not used. Two wire power cable is used direct from the pressure switch to the pump.

