
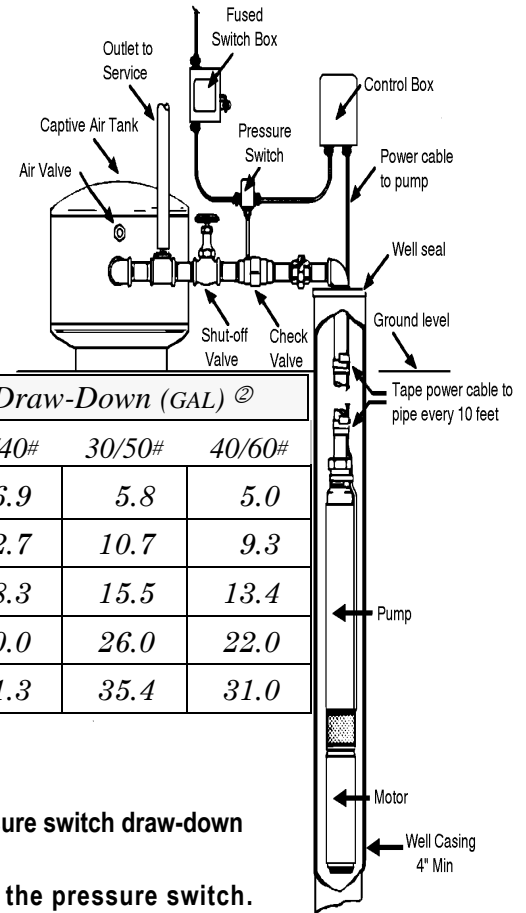



## WATER SYSTEMS TANKS & FITTINGS

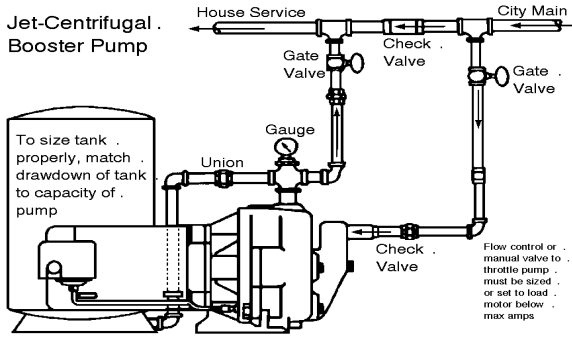

### PRO-SOURCE DIAPHRAGM TANKS

Model <sup>Ⓢ</sup>	List	Inlet	Width x Height	Draw-Down (GAL) <sup>Ⓢ</sup>		
				20/40#	30/50#	40/60#
PSP19T-T02 - (=19gal)	\$ 268.00	1" Fip	16" x 27.5"	6.9	5.8	5.0
PS35-T05----- (=35gal)	412.00	1" Fip	20" x 33"	12.7	10.7	9.3
PS50-T50----- (=50gal)	580.00	1 1/4" Fip	24" x 32.5"	18.3	15.5	13.4
PS85-T52----- (=85gal)	495.00	1 1/4" Fip	24" x 51"	30.0	26.0	22.0
PSP119-TR50(=119gal)	896.00	1 1/4" Fip	24" x 68"	41.3	35.4	31.0

(=85Gal) → drawdown is equal to an #85 non-diaphragm pressure tank. Etc.

Ⓢ Maximum Working Pressure 100# ♦ 5 Year Warranty

Ⓢ To find your minimum tank size: Match your system flow rate GPM to your pressure switch draw-down GPM to provide at least 1 minute pump run time.

The empty tank pressure should be 2psi less than the cut-in pressure of the pressure switch.



\*Pump Check Valves Plastic Screens

1/2"	\$ 8.00		
3/4"	10.50	\$ 9.50	\$ 2.29
1"	13.00	14.00	2.67
1 1/4"	20.50	15.00	3.82
1 1/2"	26.50	28.00	4.61
2"	48.00	38.00	5.35

\* = No-Lead Brass spring checks & foot valves


**4-IN-1 Plastic Foot Valve \$ 12.75**



### Pressure Switches

♦MPSM - 30/50 ~ 40/60 ~ 50/70	\$ 12.25
♦MPSM4* - 30/50 ~ 40/60 ~ 50/70	13.00
FSG2M4* - 30/50 ~ 40/60	35.00
GHG-2 - 60/80 ~ 80/100	88.00
DG2 Rod-Float Switch Emptying	60.00
DG2-R Rod-Float Switch Filling	60.00

\* With Low Pressure Cut-off ♦ IMPORT



PVC



SS

### Tank Tee

1 1/4" Mip x 1 Fip" PVC	\$ 11.45
1" or 1 1/4" STAINLESS STEEL	19.95



### Air Volume Controls

AV-42	\$ 48.00
AV-80	48.00
S-Well*	48.00

\* Shallow Well Float

### Pressure Gauges

2" Face 100# (import)	\$ 4.25
2" Face (15#,...,600#)	11.35
2 1/2" Face	15.50
2 1/2" Face liquid filled	28.00
Water Test Gauge 160#	13.00

# Typical Installations

NOTE - TWO WIRE INSTALLATION

On two wire pump installations the control box is not used. Two wire power cable is used direct from the pressure switch to the pump.

